




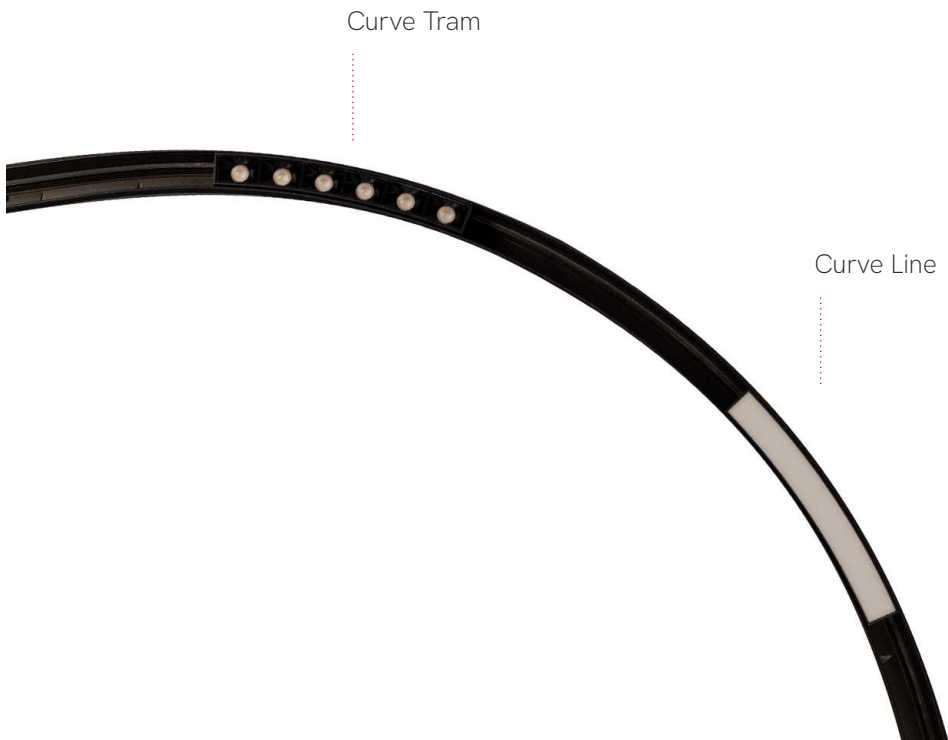

Decorative

BENEITO FAURE
passion for led light

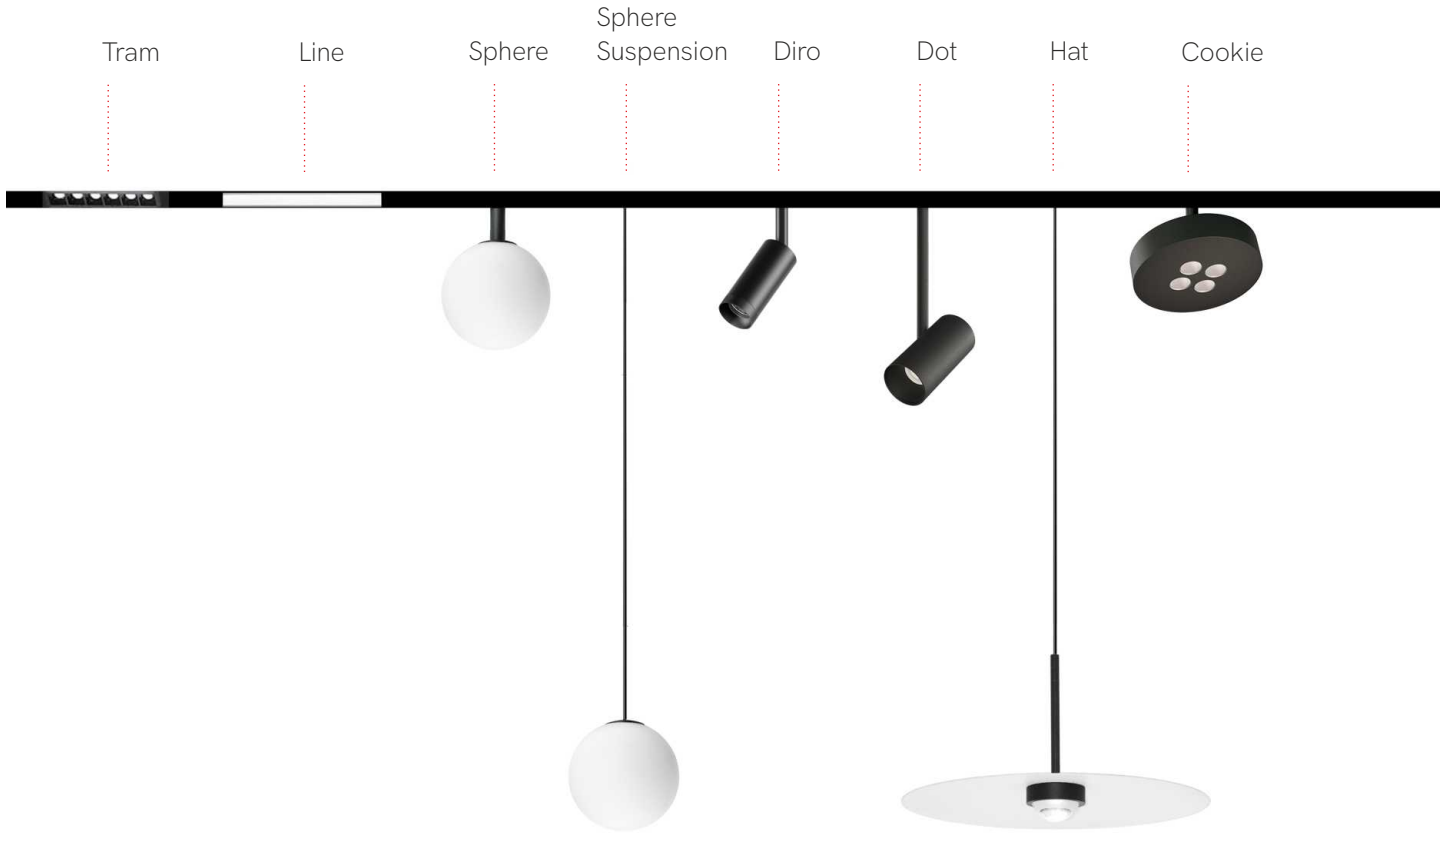

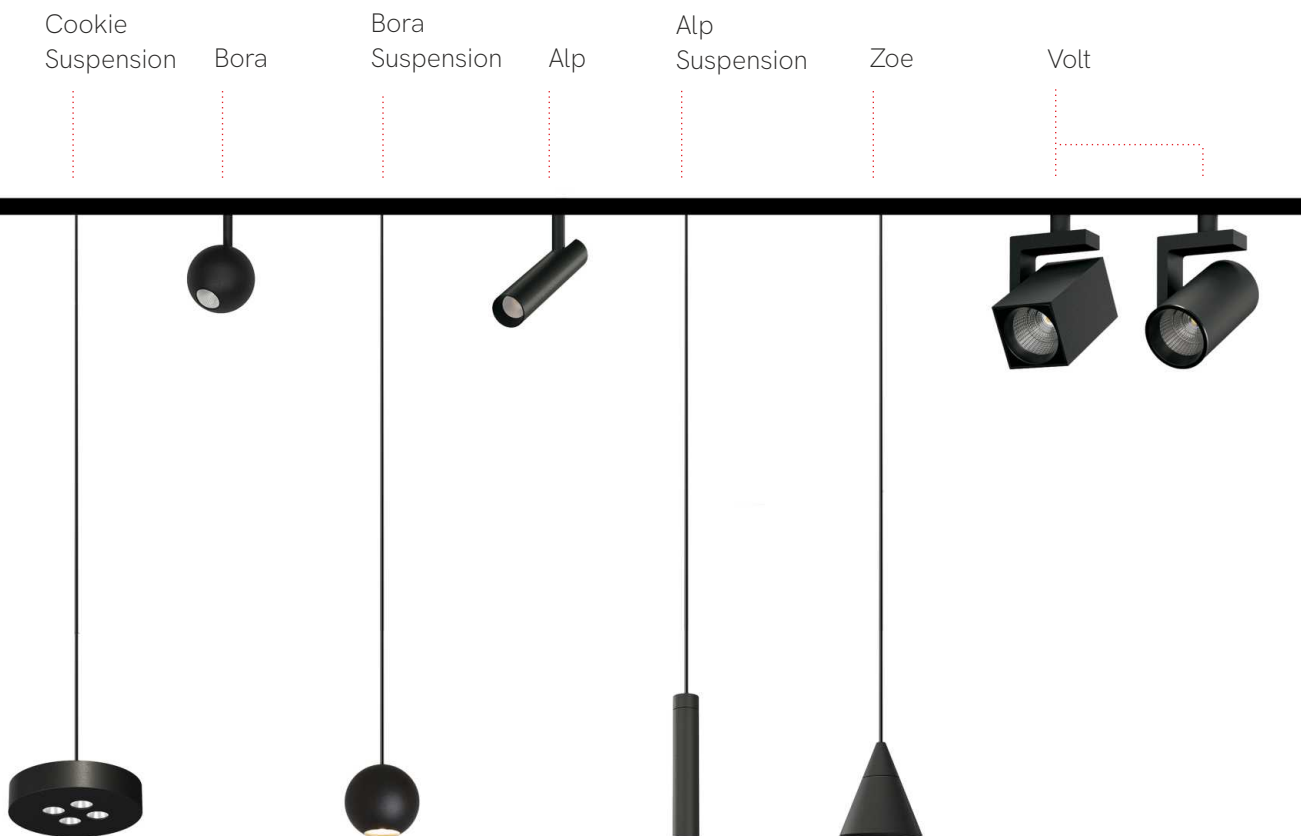

48V Magnet Track

Beneito Faure expands the collection for magnetic track and incorporates the curved track, a current trend in decorative lighting.

Thanks to the magnetized system, the spotlights are easily coupled and illuminate when they come into contact with the track.

Beneito Faure amplía la colección para carril magnético e incorpora el carril curvo, tendencia actual en iluminación decorativa.



Gracias al sistema imantado los focos se acoplan de forma sencilla y se iluminan cuando entran en contacto con el carril.



Tram 48V 4,5W



Tram 48V 9W



*Need power supply (page 408).



Technical Information

Power	4,5W	9W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	300 lm / 310 lm	690 lm / 710 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black


Code	<input type="checkbox"/> 2.700K 4776	<input type="checkbox"/> 2.700K 4780
	<input type="checkbox"/> 3.000K 4777	<input type="checkbox"/> 3.000K 4781
	<input checked="" type="checkbox"/> 2.700K 4778	<input checked="" type="checkbox"/> 2.700K 4782
	<input checked="" type="checkbox"/> 3.000K 4779	<input checked="" type="checkbox"/> 3.000K 4783




3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 24° | +40°C / -20°C | 1/50




Line 48V 7,5W



Line 48V 15W

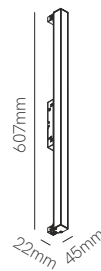

Line 48V 30W

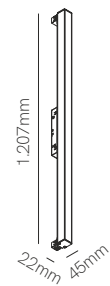

*Need power supply (page 408).



Technical Information

Power	7,5W	15W	30W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	310 lm / 320 lm	740 lm / 760 lm	1.000 lm / 1.050 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black

Code	■ 2.700K 5202 New	■ 2.700K 5203 New	■ 2.700K 5204 New
	■ 3.000K 4784	■ 3.000K 4785	■ 3.000K 4786

1/25

1/25

1/20





3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | | 100° | +40°C / -20°C

New

Curve tram 48V

Curve line 48V



*Need power supply (page 408).

Technical Information

Power	6W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	500 lm	300 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 5309	<input type="checkbox"/> 2.700K 5313
	<input type="checkbox"/> 3.000K 5310	<input type="checkbox"/> 3.000K 5314
	<input checked="" type="checkbox"/> 2.700K 5311	<input checked="" type="checkbox"/> 2.700K 5315
	<input checked="" type="checkbox"/> 3.000K 5312	<input checked="" type="checkbox"/> 3.000K 5316






3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | +40°C / -20°C | 1/40

New

Sphere 48V



Sphere suspension 48V

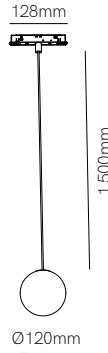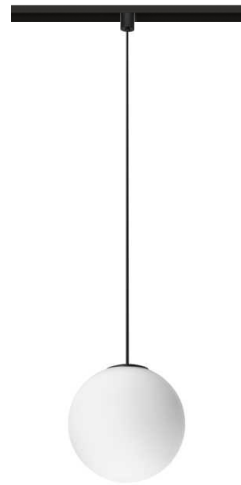


*Need power supply (page 408).



Technical Information

Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	255 lm	255 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 5369	<input type="checkbox"/> 2.700K 5375
	<input type="checkbox"/> 3.000K 5370	<input type="checkbox"/> 3.000K 5376
	<input checked="" type="checkbox"/> 2.700K 5372	<input checked="" type="checkbox"/> 2.700K 5378
	<input checked="" type="checkbox"/> 3.000K 5373	<input checked="" type="checkbox"/> 3.000K 5379



3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 48V DC | UGR <19 | | | 360° | | +40°C / -20°C | 1/12







New

New

Cookie 48V

Cookie 48V

Cookie suspension 48V

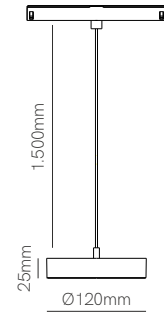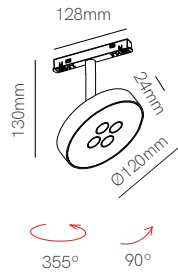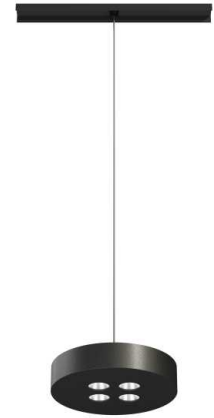

*Need power supply (page 408).

Technical Information

Power	12W	12W	12W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	940 lm / 950 lm	500 lm - 700 lm	500 lm - 700 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 4772	<input type="checkbox"/> 5181	<input type="checkbox"/> 5185
	<input type="checkbox"/> 3.000K 4773	<input checked="" type="checkbox"/> 5182	<input checked="" type="checkbox"/> 5186
	<input checked="" type="checkbox"/> 2.700K 4774	Custom RAL	Custom RAL
	<input checked="" type="checkbox"/> 3.000K 4775		
	Custom RAL		

26.000 HOURS

30.000 HOURS



30.000 HOURS



Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C / -20°C | 1/20







Dot 48V

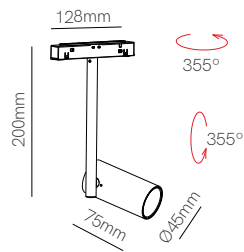


*Need power supply (page 408).



Technical Information

Power	11W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	680 lm / 690 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	2.700K	4768
	<input type="checkbox"/>	3.000K	4769
	<input checked="" type="checkbox"/>	2.700K	4770
	<input checked="" type="checkbox"/>	3.000K	4771
		Custom RAL	




ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 35° | +40°C / -20°C | 1/20



Bora 48V

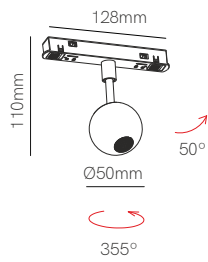

Bora 48V suspension

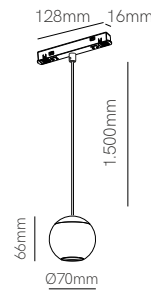

*Need power supply (page 408).




Technical Information

Power	4,5W	8,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	315 lm / 325 lm	610 lm / 620 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Back / Chrome / Rose gold

Code	<input type="checkbox"/> 2.700K	4581	<input type="checkbox"/> 2.700K	4573
	<input type="checkbox"/> 3.000K	4582	<input type="checkbox"/> 3.000K	4574
	<input checked="" type="checkbox"/> 2.700K	4583	<input checked="" type="checkbox"/> 2.700K	4575
	<input checked="" type="checkbox"/> 3.000K	4584	<input checked="" type="checkbox"/> 3.000K	4576
	<input type="checkbox"/> 2.700K	4585	<input type="checkbox"/> 2.700K	4577
	<input type="checkbox"/> 3.000K	4586	<input type="checkbox"/> 3.000K	4578
	<input type="checkbox"/> 2.700K	4587	<input type="checkbox"/> 2.700K	4579
	<input type="checkbox"/> 3.000K	4588	<input type="checkbox"/> 3.000K	4580

UGR <10 | 38°

UGR <15 | 36°





3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | CRI >93 | III | +40°C / -20°C | 1/18



Alp 48V



Alp suspension 48V

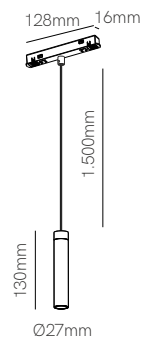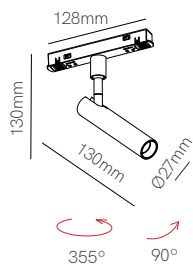

*Need power supply (page 408).

Technical Information

Power	4,5W	4,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	260 lm / 270 lm	260 lm / 270 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 4787	<input type="checkbox"/> 2.700K 4791
	<input type="checkbox"/> 3.000K 4788	<input type="checkbox"/> 3.000K 4792
	<input checked="" type="checkbox"/> 2.700K 4789	<input checked="" type="checkbox"/> 2.700K 4793
	<input checked="" type="checkbox"/> 3.000K 4790	<input checked="" type="checkbox"/> 3.000K 4794
	Custom RAL	Custom RAL

1/20


1/25



Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C / -20°C

Zoe 48V

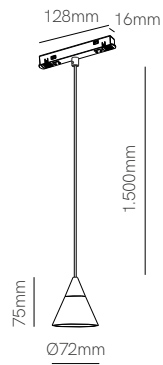


*Need power supply (page 408).

Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	360 lm / 370 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	2.700K	4795
	<input type="checkbox"/>	3.000K	4796
	<input checked="" type="checkbox"/>	2.700K	4797
	<input checked="" type="checkbox"/>	3.000K	4798
		Custom RAL	




Consult delivery terms and conditions.

3 YEARS WARRANTY |
 26.000 HOURS |
 IP 20 |
 48V DC |
 UGR <19 |
 CRI ≥90 |
 III |
 38° |
 +40°C / -20°C |
 1/36

New

Hat 48V

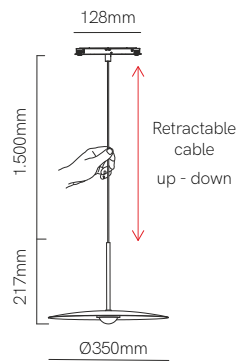


*Need power supply (page 408).

Technical Information

Power	8W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	835 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	2.700K	5363
	<input type="checkbox"/>	3.000K	5364
	<input checked="" type="checkbox"/>	2.700K	5366
	<input checked="" type="checkbox"/>	3.000K	5367





3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 48V DC | | | 83° | +40°C / -20°C |



Volt round 48V

Volt square 48V

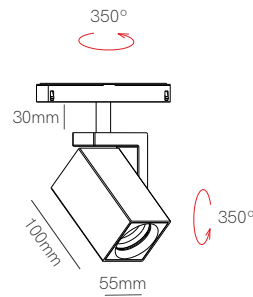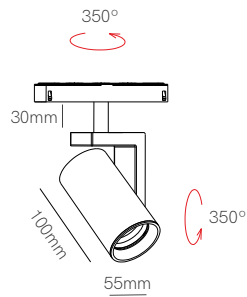

*Need power supply (page 408).

Technical Information

Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5037 <input checked="" type="checkbox"/> 5038 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 5039 <input checked="" type="checkbox"/> 5040 <input checked="" type="checkbox"/> Custom RAL




① Consult delivery terms and conditions.





New

Diro

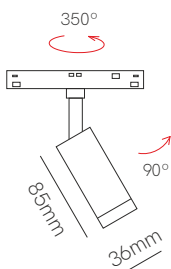


*Need power supply (page 408).


Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	Dali 2.700K - 6.500K
Lumens	420 lm
Material	Aluminium
Finishes	White / Black
Code	<input type="checkbox"/> 5239 <input checked="" type="checkbox"/> 5238

Accessories




Honeycomb anti-glare (Included)



5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 48V DC | UGR <10 | CRI ≥90 | III | 36° | +40°C / -20°C | DALI 2 | 1/20

New


Fine 25 circle 48V

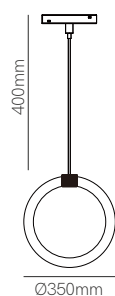

*Need power supply (page 408).

Technical Information

Power	19W												
Installation	Magnet Track												
Color Temperature	3.000K / 4.000K												
Lumens	850 lm / 950 lm												
Finishes	Aluminium / Black												
Code	<table border="1"> <tr> <td><input type="checkbox"/></td> <td>3.000K</td> <td>5431</td> </tr> <tr> <td><input type="checkbox"/></td> <td>4.000K</td> <td>5441</td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td>3.000K</td> <td>5432</td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td>4.000K</td> <td>5442</td> </tr> </table>	<input type="checkbox"/>	3.000K	5431	<input type="checkbox"/>	4.000K	5441	<input checked="" type="checkbox"/>	3.000K	5432	<input checked="" type="checkbox"/>	4.000K	5442
<input type="checkbox"/>	3.000K	5431											
<input type="checkbox"/>	4.000K	5441											
<input checked="" type="checkbox"/>	3.000K	5432											
<input checked="" type="checkbox"/>	4.000K	5442											



Casambi magnet track control New



472x CASAMBI is a master DALI device, using Bluetooth technology, suitable for monomaster applications, developed to control DALI lamps via mobile devices, using the Casambi app. 64 lamps (control gear) can be programmed, and assigned to up to 8 groups.

Power supply 24Vdc to 48Vdc, not polarized. Fused and protected against voltage peaks.
Two automatic programming modes, Standard and Fast Group, to program new lamps found on the bus.


Allows for the connection of up to 64 DALI lamps (control gear), assigning them to up to 8 groups.
Fixtures available for: Broadcast control, 8 groups, 4 TW groups.

The lamps on the bus are controlled by means of group commands: each lamp will execute only commands sent to its belonging group.


472x CASAMBI es un dispositivo maestro DALI, con tecnología Bluetooth, adecuado para aplicaciones monomáster, está desarrollado para controlar lámparas DALI a través de dispositivos móviles, utilizando la app Casambi. Se pueden programar 64 lámparas (equipo de control) y asignarlas a hasta un máximo de 8 grupos.

Fuente de alimentación de 24 Vdc a 48 Vdc, no polarizada, fusionada y protegida contra picos de voltaje. Dos modos de programación automática, Estándar y Grupo Rápido, para programar nuevas lámparas que se encuentren en el bus.



Permite la conexión de hasta 64 lámparas DALI (equipos auxiliares), asignándolas a un máximo de 8 grupos.
Dispositivos disponibles para: Control de difusión, 8 grupos, 4 grupos TW.
Las lámparas del bus se controlan mediante comandos de grupo: cada lámpara ejecutará sólo los comandos enviados a su grupo de pertenencia.

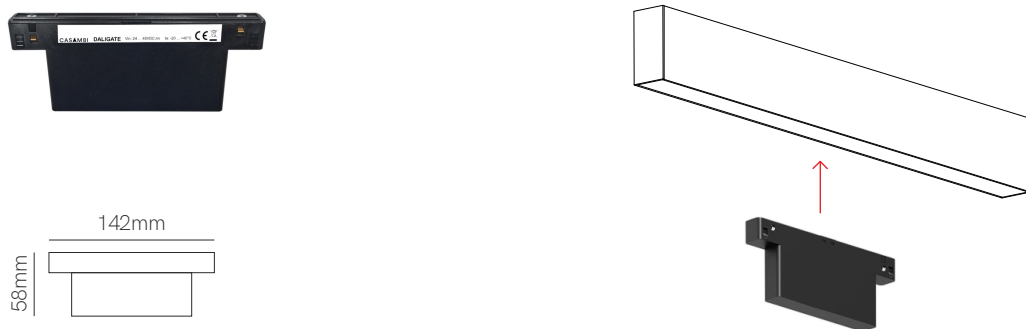

Code	Version	Power	IP	VDC OUT	Size
□ 6721	Casambi magnet track control	8W	IP20	24-48 VDC	142x58x18mm
■ 6722	Casambi magnet track control	8W	IP20	24-48 VDC	142x58x18mm



Magnet track accessories

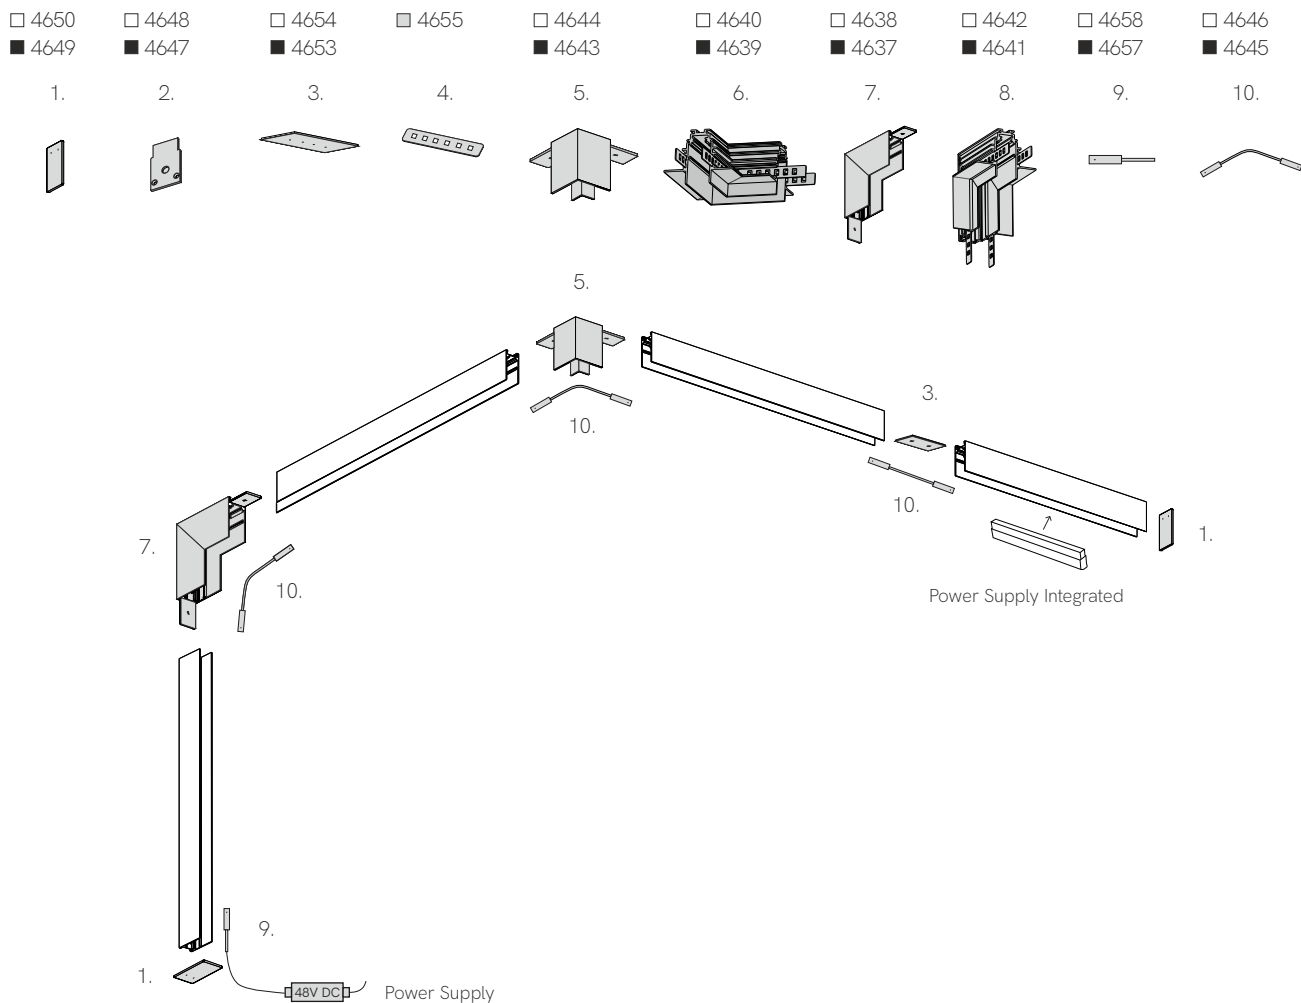

3 YEARS WARRANTY | IP 20

Power Supplies 48V



Code	Version	Power	IP	VDC OUT	Size
4711	■ Power Supply Basic	60W	IP67	48 VDC	150x53x36mm
4707	□ Power Supply Top	150W	IP65	48 VDC	219x63x35mm
4708	□ Power Supply Top	240W	IP65	48 VDC	244x71x37mm
5139	□ Power Supply Dali	90W	IP67	48 VDC	171x63x38mm
5140	□ Power Supply Dali	200W	IP67	48 VDC	191x68x40mm
6023	■ New Power Supply Integrated	100W	IP20	48 VDC	325x23x43mm
6024	■ New Power Supply Integrated	150W	IP20	48 VDC	325x23x43mm
6025	■ New Power Supply Integrated	250W	IP20	48 VDC	390x23x43mm


5 YEARS WARRANTY | 100-240 VAC | Basic Top | PF >0,9 | Dali



Magnet track surface

W: 26mm H: 53mm

- 1m 4660
- 2m 4662
- 1m 4659
- 2m 4661



Magnet track recessed

W: 72mm x H: 55mm

- 1m 4664
- 2m 4666
- 1m 4663
- 2m 4665



x2

End cap surface

L: 53mm W: 26.6mm H: 2mm

- 4650
- 4649




x2

End cap recessed

L: 52mm W: 32mm H: 2mm

- 4648
- 4647




x1 + x2

L joint wall ceiling surface

L: 100mm W: 100mm H: 26mm

- 4638
- 4637




x1 + x4

L joint wall ceiling recessed

L: 100mm W: 100mm H: 72mm

- 4642
- 4641



x1 + x2

L joint ceiling surface

L: 40mm W: 40mm H: 53mm

- 4644
- 4643



x1 + x4

L joint ceiling recessed

L: 100mm W: 100mm H: 55mm

- 4640
- 4639



New

Curve magnet track surface

W: 26mm H: 53mm

- R500 1/4 5317
- R500 1/4 5319



New

Curve track end cap

L: 53mm W: 26.6mm H: 2mm

- 5428
- 5427



Linear joint surface

L: 80mm W: 22.5mm H: 2mm

- 4654
- 4653



x2

Linear joint recessed

L: 70mm W: 11.5mm H: 1mm

- 4655



Start connector

L: 98mm W: 18mm H: 18mm


- 4658
- 4657



Central corner connector

L: 98mm W: 18mm H: 18mm

- 4646
- 4645



PVC trim

W: 26.8mm H: 3.5mm

- 1m 4651
- 2m 4652



Suspension kit

L: 45mm W: 22mm | Ø15mm H: 1.900mm

- 4807

Create your own design with **Space**

Space is a lighting concept that seeks to be part of the design and finishes of a room. This lighting system creates an unlimited number of lines and compositions that are born out of a surface base. The final design is left to the user, who can select and customize the distribution of the luminaire in the space.

Space es un concepto de iluminación que busca formar parte del diseño y acabados de un espacio. Este sistema de iluminación crea trazos y composiciones ilimitadas que nacen de una base de superficie. El diseño final queda en manos del usuario, el cual puede escoger y personalizar como distribuye la luminaria a través del espacio.



This innovative system allows you to create spectacular vertical suspended compositions by means of a unique and incomparable design. With our decorative spotlights it is possible to create entirely customizable light points at different heights. The Space system, supported by a thread up to six meters long, is compatible with Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL and Lievo XL decorative products. Choose the size of the base that best suits the composition among different diameters and create your own luminaire.



Este innovador sistema permite crear composiciones colgantes verticales espectaculares a través de un diseño único e irrepetible. Con nuestros spotlights decorativos es posible crear puntos de luz a distintas alturas totalmente personalizables. El sistema Space, sostenido por un hilo de hasta seis metros de largo, es compatible con los productos decorativos Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL y Lievo XL. Escoge el tamaño de la base que mejor se adapte a la composición entre distintos diámetros y crea tu propia luminaria.




The light points of the Space system can be moved away from the base and brought to any place desired through the wire holder. It is a piece that is mounted on the surface of the ceiling to support the conductor wire of the lighting structure. This system of hanging lamps gives total freedom to architects and interior designers to create repetitions of light that can compose from chaotic structures to the most symmetrical. If you have a false ceiling where the driver can rest, you can use the system with the individual recessed base, a great option for integrating the structure in an elegant way.

Los puntos de luz del sistema Space pueden alejarse de la base y llevarse a cualquier ubicación deseada a través del wire holder. Se trata de una pieza que se instala en la superficie del techo para sostener el hilo conductor de la estructura lumínica. Este sistema de lámparas colgantes ofrece una total libertad a arquitectos e interioristas para crear repeticiones de luz que pueden componer desde estructuras caóticas, hasta las más simétricas. En caso de contar con un falso techo donde pueda reposar el driver, puedes usar el sistema con la base individual de encastrar, una muy buena opción para integrar de forma elegante la estructura.



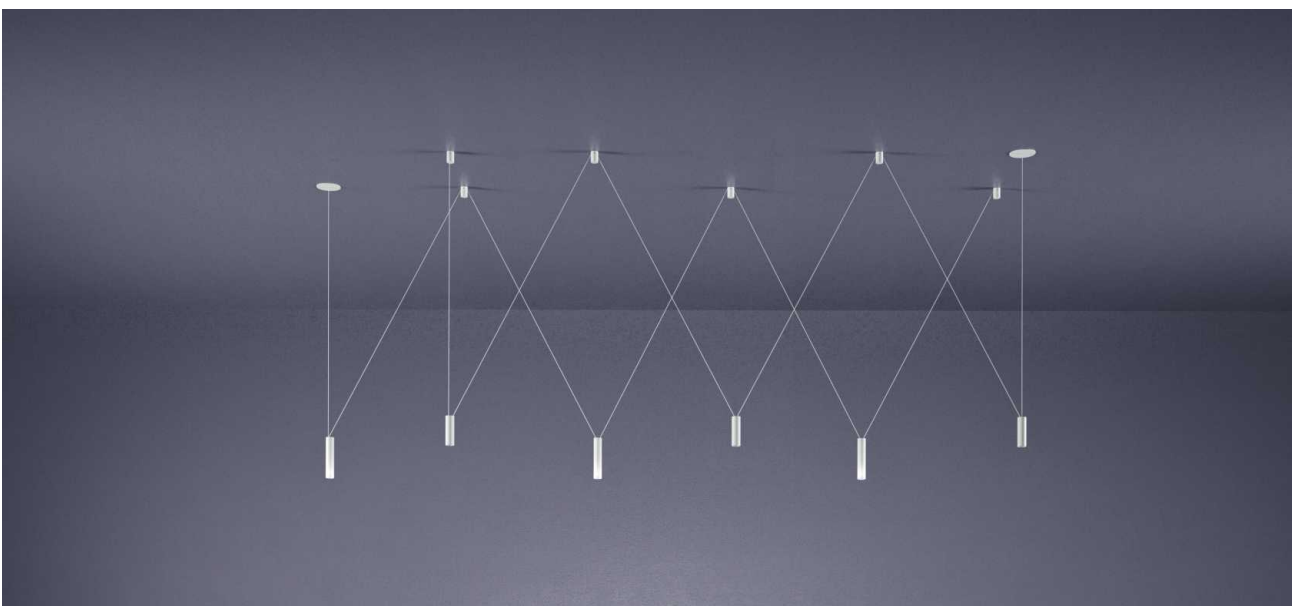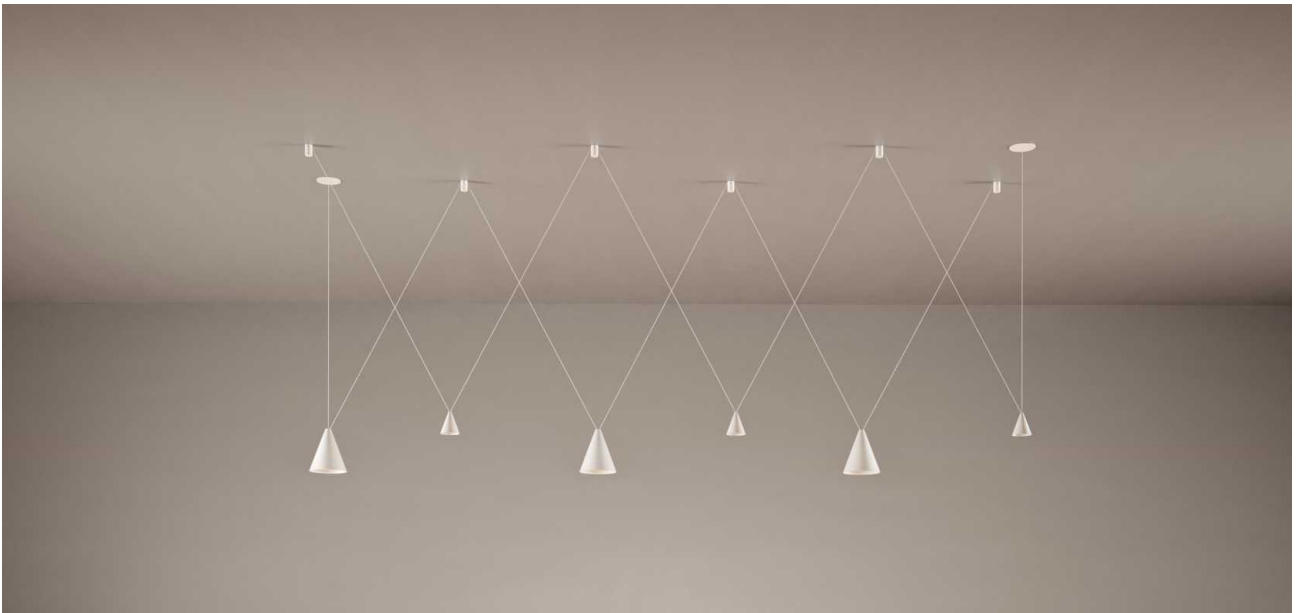

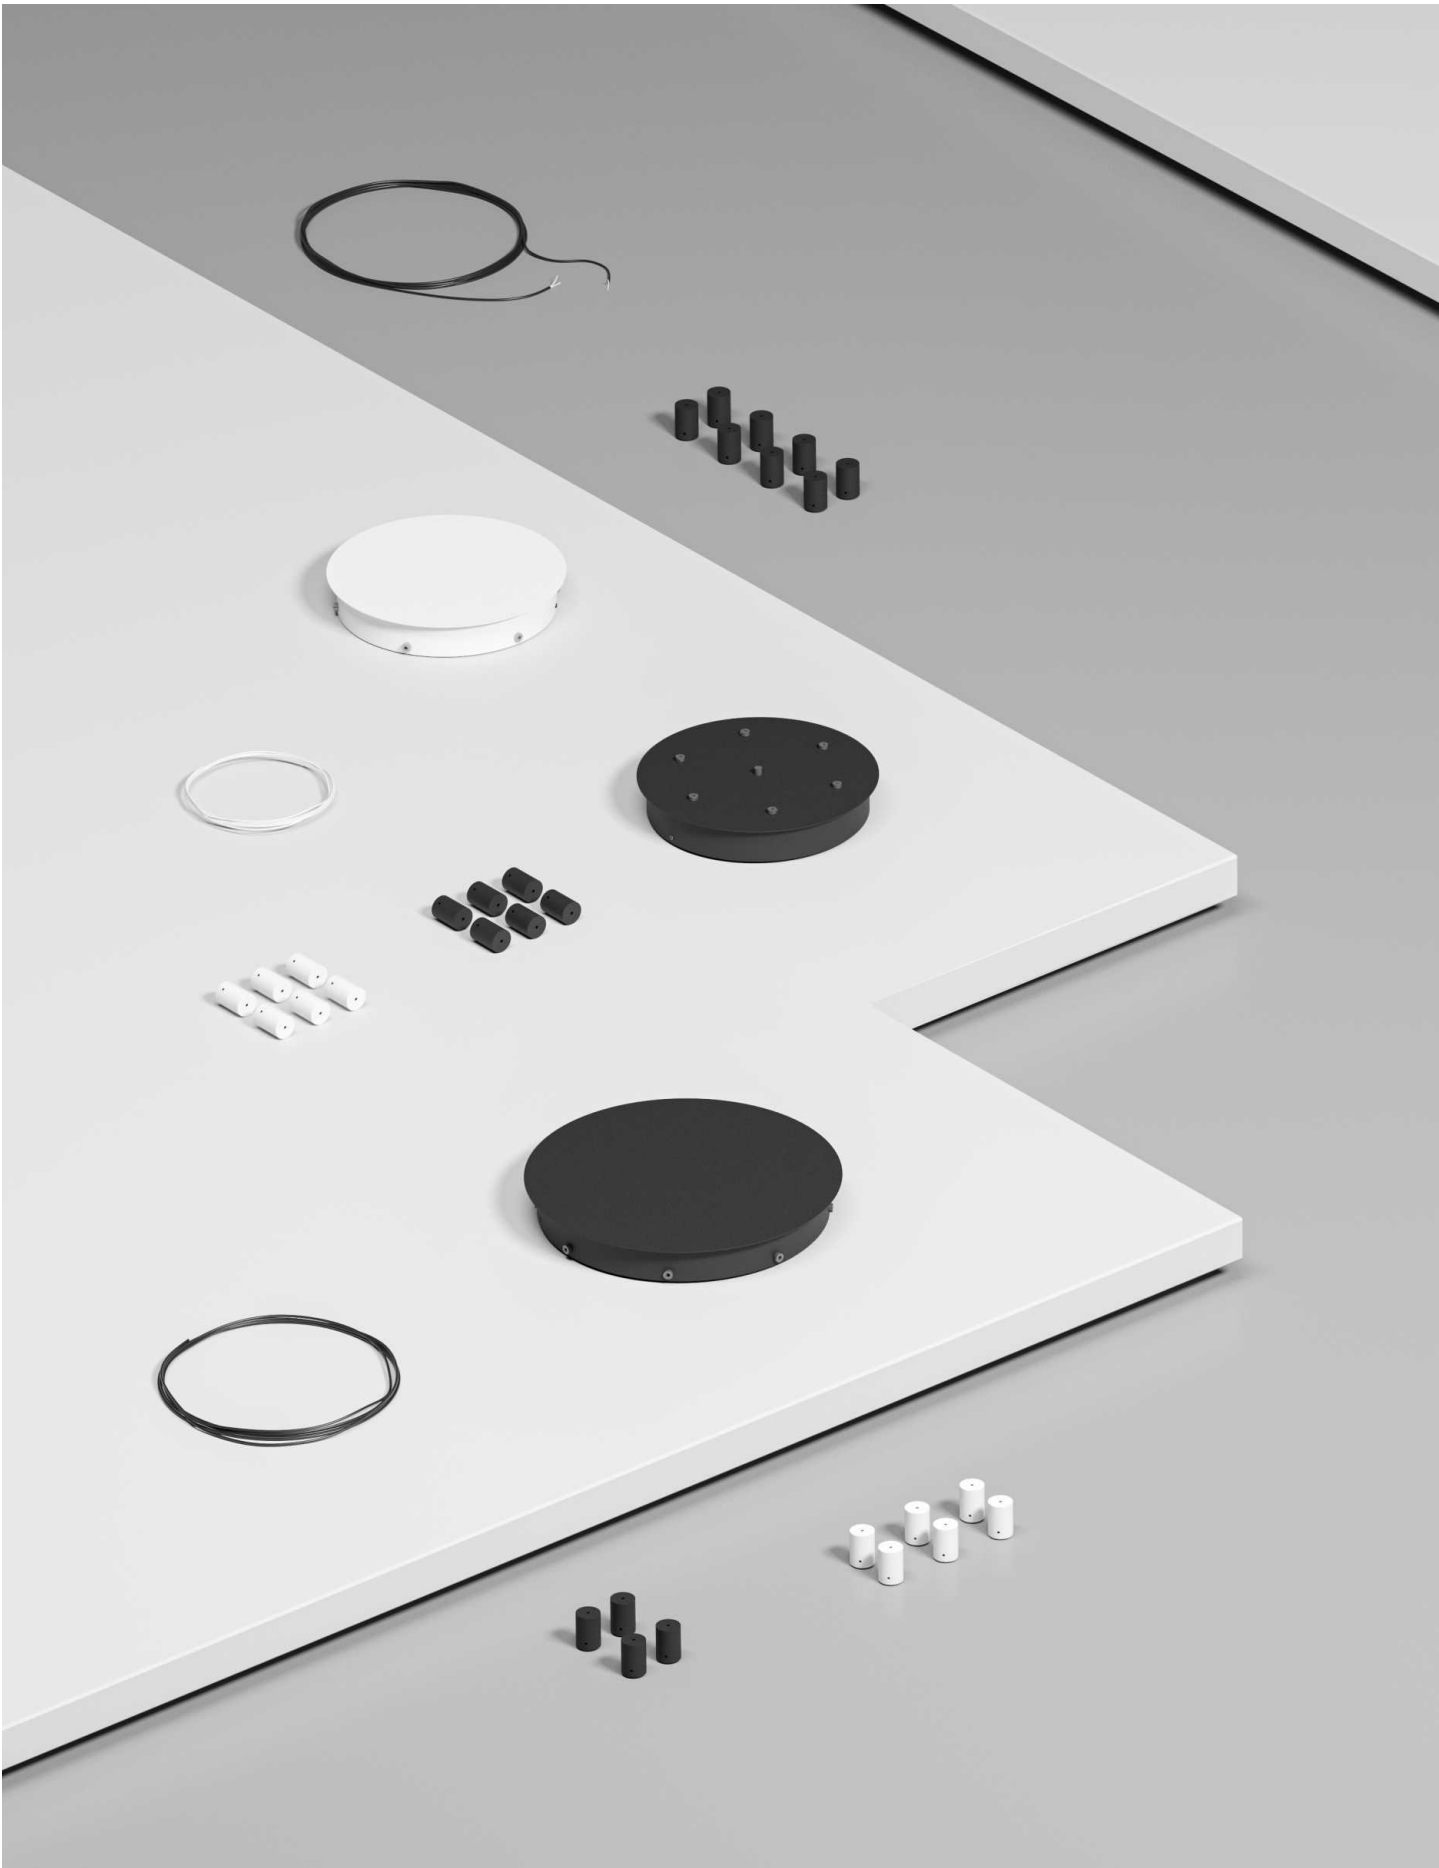



▶ VIDEO



Side base

Base Ø250x41mm



Code	
Code	S1

Product		Units	
Bora	1	2 units	2
Zoe	3	3 units	3
Lievo	5	4 units	4
Alp	7	5 units	5
Nano Alp	8	6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
<input type="checkbox"/> White	1
<input checked="" type="checkbox"/> Black	2
Custom RAL	

Code: **S1**

Base Ø280x41mm



Code	
Code	S2

Product		Units	
Bora	1	2 units	2
Zoe	3	3 units	3
Lievo	5	4 units	4
Alp	7	5 units	5
Nano Alp	8	6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
<input type="checkbox"/> White	1
<input checked="" type="checkbox"/> Black	2
Custom RAL	

Code: **S2**

Base Ø330x41mm



Code	
Code	S3

Product		Units	
Bora	1	2 units	2
Bora XL	2	3 units	3
Zoe	3	4 units	4
Zoe XL	4	5 units	5
Lievo	5	6 units	6
Lievo XL	6	7 units	7
Alp	7	8 units	8
Nano Alp	8		

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
<input type="checkbox"/> White	1
<input checked="" type="checkbox"/> Black	2
Custom RAL	

Code: **S3** 

① Consult delivery terms and conditions.


Accessories



Wire holder
 5106
 5107



Additional wire (1m). Max. length 6m
 5128
 5129



*Create your code according to your preferences. For other finishing please consult.





Front base

Base Ø250x41mm



Code	
Code	F1

Product	Units
Bora	1
Zoe	3
Lievo	5
Alp	7
Nano Alp	8

Driver	Units
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	Units
<input type="checkbox"/> White	1
<input checked="" type="checkbox"/> Black	2
Custom RAL	

Code: **F1**

Base Ø280x41mm



Code	
Code	F2

Product	Units
Bora	1
Zoe	3
Lievo	5
Alp	7
Nano Alp	8

Driver	Units
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	Units
<input type="checkbox"/> White	1
<input checked="" type="checkbox"/> Black	2
Custom RAL	

Code: **F2**

Base Ø330x41mm



Code	
Code	F3

Product	Units
Bora	1
Zoe	3
Lievo	5
Alp	7
Nano Alp	8
	7 units
	8 units

Driver	Units
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	Units
<input type="checkbox"/> White	1
<input checked="" type="checkbox"/> Black	2
Custom RAL	

Code: **F3**

Base Ø330x41mm



Code	
Code	F3

Product	Units
Bora XL	2
Zoe XL	4
Lievo XL	6

Driver	Units
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	Units
<input type="checkbox"/> White	1
<input checked="" type="checkbox"/> Black	2
Custom RAL	

Code: **F3** 

① Consult delivery terms and conditions.


Accessories



Wire holder
 5106
 5107



Additional wire (1m). Max. length 6m
 5128
 5129



*Create your code according to your preferences. For other finishing please consult.







Private Residence, Rubí (Spain). Design: Prêt-à-porter casas.

Bora suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information


Power	8W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5084
	<input type="checkbox"/> 5085
	Custom RAL

Consult delivery terms and conditions.

Accessories


Surface Base 8W Ø75x33mm <input type="checkbox"/> 5118 <input type="checkbox"/> 5119	Recessed Base 8W Ø90x22mm / Ø80mm <input type="checkbox"/> 5120 <input type="checkbox"/> 5121	Wire holder <input type="checkbox"/> 5106 <input type="checkbox"/> 5107	Additional wire (1m) <input type="checkbox"/> 5128 <input type="checkbox"/> 5129	Side base / Front base Ø250mm Side base / Front base Ø280mm Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

--	--	--	--	--	--	--	--	--	--	--	--

Bora XL suspension

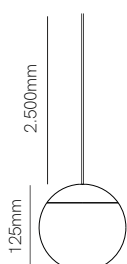

*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	15W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.100 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5086
	<input checked="" type="checkbox"/> 5087
	Custom RAL

Consult delivery terms and conditions.

Accessories



Surface Base 15W
Ø75x33mm
 5122
 5123



Recessed Base 15W
Ø90x22mm / Ø80mm
 5124
 5125




Wire holder
 5106
 5107



Additional wire (1m)
 5128
 5129




Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.


3 YEARS WARRANTY |
 30.000 HOURS |
 IP 20 |
 100/277 VAC |
 UGR <19 |
 PF >0,9 |
 CRI ≥93 |
 |
 38° |
 50/60 Hz |
 +45°C / -20°C |
 CCT SWITCH |
 1/20



 Electrolytic Plating BRB1
On demand



Zoe suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	8W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5092
	<input checked="" type="checkbox"/> 5093
	Custom RAL

Consult delivery terms and conditions.

Accessories



Surface Base 8W
Ø75x33mm
 5118
 5119



Recessed Base 8W
Ø90x22mm / Ø80mm
 5120
 5121




Wire holder
 5106
 5107



Additional wire (1m)
 5128
 5129




Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY |
 30.000 HOURS |
 IP 20 |
 100/277 VAC |
 UGR <19 |
 PF >0,9 |
 CRI ≥93 |
 □ |
 38° |
 50/60 Hz |
 🌡️ +40°C / -20°C |
 🔌 CCT SWITCH |
 1/20

Zoe XL suspension

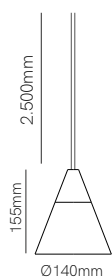

*Base not included. You need to choose a base to complete the instalation.

Technical Information


Power	15W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.100 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5094
	<input checked="" type="checkbox"/> 5095
	Custom RAL

Consult delivery terms and conditions.

Accessories

Surface Base 15W Ø75x33mm <input type="checkbox"/> 5122 <input checked="" type="checkbox"/> 5123	Recessed Base 15W Ø90x22mm / Ø80mm <input type="checkbox"/> 5124 <input checked="" type="checkbox"/> 5125	Wire holder <input type="checkbox"/> 5106 <input checked="" type="checkbox"/> 5107	Additional wire (1m) <input type="checkbox"/> 5128 <input checked="" type="checkbox"/> 5129	Side base / Front base Ø250mm Side base / Front base Ø280mm Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

--	--	--	--	--	--	--	--	--	--	--	--





Nano alp suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information


Power	5W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	370 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5096
	<input checked="" type="checkbox"/> 5097
	Custom RAL

Consult delivery terms and conditions.

Accessories

Surface Base 5W Ø75x33mm <input type="checkbox"/> 5114 <input checked="" type="checkbox"/> 5115	Recessed Base 5W Ø90x22mm / Ø80mm <input type="checkbox"/> 5116 <input checked="" type="checkbox"/> 5117	Wire holder <input type="checkbox"/> 5106 <input checked="" type="checkbox"/> 5107	Additional wire (1m) <input type="checkbox"/> 5128 <input checked="" type="checkbox"/> 5129	Side base / Front base Ø250mm Side base / Front base Ø280mm Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY	30.000 HOURS	IP 20	100/277 VAC	UGR <19	PF >0,9	CRI ≥93	45°	50/60 Hz	+40°C -20°C	CCT SWITCH	1/20
----------------------------	------------------------	--------------	----------------	------------	------------	-------------------	-----	-------------	----------------	---------------	------

Alp suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information


Power	5W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	370 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5098
	<input checked="" type="checkbox"/> 5099
	Custom RAL

Consult delivery terms and conditions.

Accessories

Surface Base 5W Ø75x33mm <input type="checkbox"/> 5114 <input checked="" type="checkbox"/> 5115	Recessed Base 5W Ø90x22mm / Ø80mm <input type="checkbox"/> 5116 <input checked="" type="checkbox"/> 5117	Wire holder <input type="checkbox"/> 5106 <input checked="" type="checkbox"/> 5107	Additional wire (1m) <input type="checkbox"/> 5128 <input checked="" type="checkbox"/> 5129	Side base / Front base Ø250mm Side base / Front base Ø280mm Side base / Front base Ø330mm




*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY	30.000 HOURS	IP 20	100/277 VAC	UGR <19	PF >0,9	CRI ≥93	45°	50/60 Hz	+40°C / -20°C	CCT SWITCH	1/20
------------------	--------------	-------	-------------	---------	---------	---------	-----	----------	---------------	------------	------





Lievo suspension

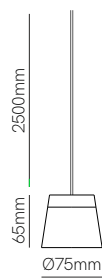

*Base not included. You need to choose a base to complete the installation.






Technical Information


Power	8W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5088
	<input checked="" type="checkbox"/> 5089
	Custom RAL

Consult delivery terms and conditions.

Accessories


- 
 Surface Base 8W
 Ø75x33mm
 5118
 5119
- 
 Recessed Base 8W
 Ø90x22mm / Ø80mm
 5120
 5121
- 
 Wire holder
 5106
 5107
- 
 Additional wire (1m)
 5128
 5129
- 
 Side base / Front base Ø250mm
 Side base / Front base Ø280mm
 Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY |
 30.000 HOURS |
 IP 20 |
 100/277 VAC |
 UGR <19 |
 PF >0,9 |
 CRI ≥93 |
 |
 38° |
 50/60 Hz |
 +45°C / -20°C |
 CCT SWITCH |
 1/20

Lievo XL suspension

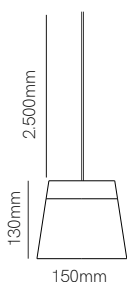

*Base not included. You need to choose a base to complete the installation.

Technical Information


Power	15W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.100 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5090 <input type="checkbox"/> 5091 <input checked="" type="checkbox"/> Custom RAL
------	------------------------------------------------------------------------------------------------------------------

Consult delivery terms and conditions.

Accessories

Surface Base 15W Ø75x33mm <input type="checkbox"/> 5122 <input checked="" type="checkbox"/> 5123	Recessed Base 15W Ø90x22mm / Ø80mm <input type="checkbox"/> 5124 <input checked="" type="checkbox"/> 5125	Wire holder <input type="checkbox"/> 5106 <input checked="" type="checkbox"/> 5107	Additional wire (1m) <input type="checkbox"/> 5128 <input checked="" type="checkbox"/> 5129	Side base / Front base Ø250mm Side base / Front base Ø280mm Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.



3 YEARS WARRANTY	30.000 HOURS	IP 20	100/277 VAC	UGR <19	PF >0,9	CRI ≥93	38°	50/60 Hz	+45°C -20°C	CCT SWITCH	1/20
----------------------------	------------------------	-------	----------------	---------	---------	----------------	-----	-------------	----------------	---------------	------





New

Cookie suspension

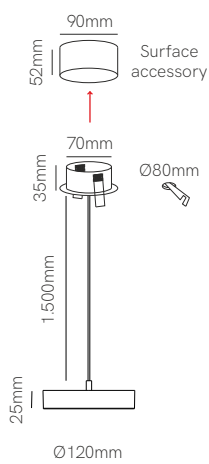


*Includes surface and recessed base.

Technical Information

Power	12W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 5183
	<input checked="" type="checkbox"/> 5184
	Custom RAL



Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥90 | | 38° | 50/60 Hz | TRIAC DIMM | +40°C / -20°C | CCT SWITCH | 1/20



Bora suspension surface




Bora suspension recessed

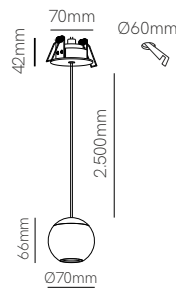

Technical Information



Power	8,5W	8,5W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	530 lm / 540 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold
Code	<input type="checkbox"/> 2.700K 4605 <input type="checkbox"/> 3.000K 4606 <input checked="" type="checkbox"/> 2.700K 4607 <input checked="" type="checkbox"/> 3.000K 4608 <input type="checkbox"/> 2.700K 4609 <input type="checkbox"/> 3.000K 4610 <input checked="" type="checkbox"/> 2.700K 4611 <input checked="" type="checkbox"/> 3.000K 4612	<input type="checkbox"/> 2.700K 4613 <input type="checkbox"/> 3.000K 4614 <input checked="" type="checkbox"/> 2.700K 4615 <input checked="" type="checkbox"/> 3.000K 4616 <input type="checkbox"/> 2.700K 4617 <input type="checkbox"/> 3.000K 4618 <input checked="" type="checkbox"/> 2.700K 4619



3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <15 | PF >0,6 | CRI ≥93 | 36° | 50/60 Hz | +40°C / -20°C | 1/18

Bora recessed 4,5W

Bora recessed 8,5W

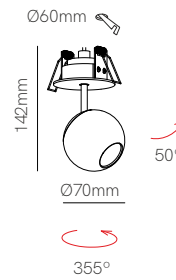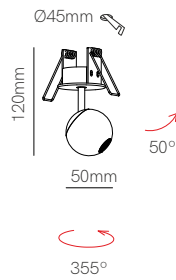

Technical Information

Version	Bora recessed 4,5W	Bora recessed 8,5W
Power	4,5W	8,5W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code	<input type="checkbox"/>	2.700K	4589	<input type="checkbox"/>	2.700K	4597
	<input type="checkbox"/>	3.000K	4590	<input type="checkbox"/>	3.000K	4598
	<input checked="" type="checkbox"/>	2.700K	4591	<input checked="" type="checkbox"/>	2.700K	4599
	<input checked="" type="checkbox"/>	3.000K	4592	<input checked="" type="checkbox"/>	3.000K	4600
	<input type="checkbox"/>	2.700K	4593	<input type="checkbox"/>	2.700K	4601
	<input type="checkbox"/>	3.000K	4594	<input type="checkbox"/>	3.000K	4602
	<input type="checkbox"/>	2.700K	4595	<input type="checkbox"/>	2.700K	4603
	<input type="checkbox"/>	3.000K	4596	<input type="checkbox"/>	3.000K	4604

UGR <10 | PF >0,5 | 38°


UGR <15 | PF >0,6 | 36°




3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C / -20°C | 1/18



Bora surface 4,5W

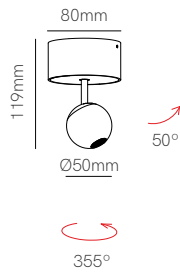

Bora surface 8,5W

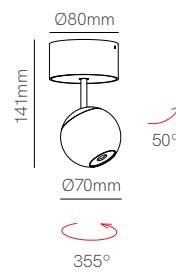

Technical Information

Version	Bora surface 4,5W	Bora surface 8,5W
Power	4,5W	8,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code	<input type="checkbox"/> 2.700K 4621	<input type="checkbox"/> 2.700K 4629
	<input type="checkbox"/> 3.000K 4622	<input type="checkbox"/> 3.000K 4630
	<input checked="" type="checkbox"/> 2.700K 4623	<input checked="" type="checkbox"/> 2.700K 4631
	<input checked="" type="checkbox"/> 3.000K 4624	<input checked="" type="checkbox"/> 3.000K 4632
	<input type="checkbox"/> 2.700K 4625	<input type="checkbox"/> 2.700K 4633
	<input type="checkbox"/> 3.000K 4626	<input type="checkbox"/> 3.000K 4634
	<input type="checkbox"/> 2.700K 4627	<input type="checkbox"/> 2.700K 4635
	<input type="checkbox"/> 3.000K 4628	<input type="checkbox"/> 3.000K 4636

UGR <10 | PF >0,5 | 38°

UGR <15 | PF >0,6 | 36°




3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C / -20°C | 1/18



New

Alp surface



Technical Information

Power	4,5W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	220 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	2.700K	5357
	<input type="checkbox"/>	3.000K	5358
	<input checked="" type="checkbox"/>	2.700K	5360
	<input checked="" type="checkbox"/>	3.000K	5361





3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | ⚡ | 36° | 50/60 Hz | 🌡️ +40°C / -20°C | 1/18

Zoe surface




Zoe recessed

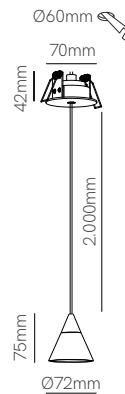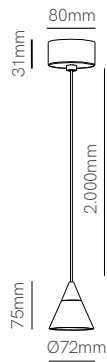

Technical Information

Power	7W	7W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	360 lm / 370 lm	360 lm / 370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 4803	<input type="checkbox"/> 2.700K 4799
	<input type="checkbox"/> 3.000K 4804	<input type="checkbox"/> 3.000K 4800
	<input checked="" type="checkbox"/> 2.700K 4805	<input checked="" type="checkbox"/> 2.700K 4801
	<input checked="" type="checkbox"/> 3.000K 4806	<input checked="" type="checkbox"/> 3.000K 4802





3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 38° | 50/60 Hz | +40°C / -20°C | 1/36



Atmos slim 25

Atmos slim 45

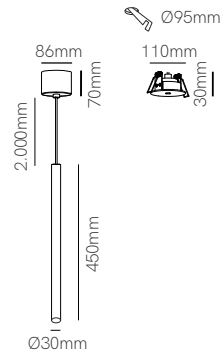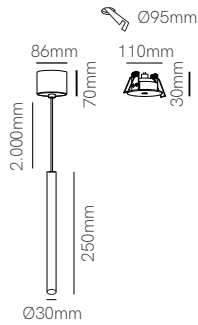

*Need Tuya Smart App to work.




Technical Information

Power	6W	6W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Tuya 2.700K - 4.000K	Tuya 2.700K - 4.000K
Lumens	460 lm	460 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	<input type="checkbox"/> 4930 <input checked="" type="checkbox"/> 4931 <input type="checkbox"/> 4932 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4750 <input checked="" type="checkbox"/> 4751 <input type="checkbox"/> 4752 <input checked="" type="checkbox"/> Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



*See page 8 for Gateway additional info.



*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 45° | 50/60 Hz | +50°C / -10°C | IK03 | tuya | 1/10

Atmos 25



Atmos 45

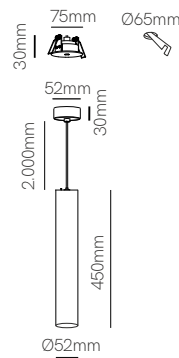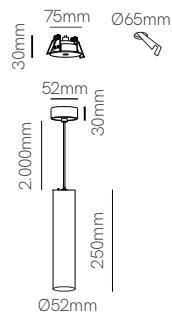

Technical Information

Power	7W	10W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	<input type="checkbox"/> 4461 <input checked="" type="checkbox"/> 4462 <input type="checkbox"/> 4952 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4463 <input checked="" type="checkbox"/> 4464 <input type="checkbox"/> 4953 <input checked="" type="checkbox"/> Custom RAL



Consult delivery terms and conditions.

Accessories



Included with:
4461 / 4463



Included with:
4461 / 4462 / 4463 / 4464



*All versions included surface base (mounted) and recessed base (not mounted).



3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH



Atmos 25 GU10



Atmos 45 GU10

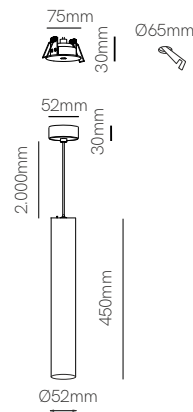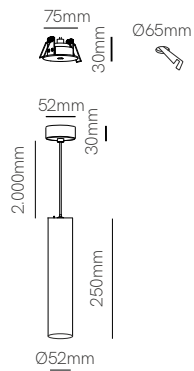

*All versions included surface base (mounted) and recessed base (not mounted).

Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	<input type="checkbox"/> 4465 <input checked="" type="checkbox"/> 4466 <input type="checkbox"/> 4954 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4467 <input checked="" type="checkbox"/> 4468 <input type="checkbox"/> 4955 <input checked="" type="checkbox"/> Custom RAL

1/8

1/4





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 220/240 VAC






Ark surface

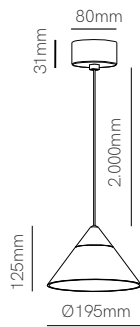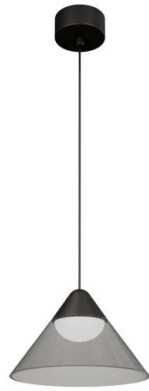

Ark recessed

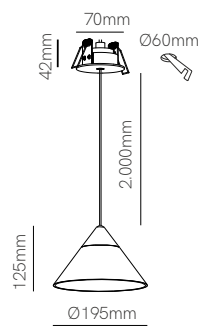

Technical Information

Power	6W	6W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	350 lm / 360 lm	350 lm / 360 lm
Material	Aluminium and acrylic	Aluminium and acrylic
Finishes	White-transparent / Black-transparent / Black-gray	White-transparent / Black-transparent / Black-gray
Code	4814 White-transp. 2.700K 4815 White-transp. 3.000K 4816 Black-transp. 2.700K 4817 Black-transp. 3.000K 4818 Black-gray 2.700K 4819 Black-gray 3.000K	4808 White-transp. 2.700K 4809 White-transp. 3.000K 4810 Black-transp. 2.700K 4811 Black-transp. 3.000K 4812 Black-gray 2.700K 4813 Black-gray 3.000K






3 YEARS WARRANTY | 26.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 90° | 50/60 Hz | +40°C / -20°C | 1/12



New

Hat surface


Hat recessed

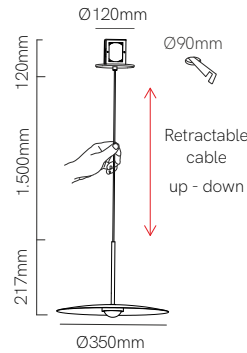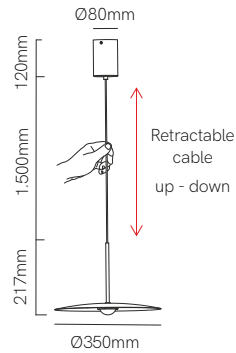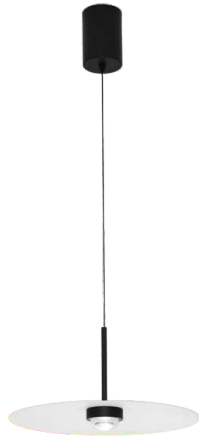

Technical Information

Power	8W	8W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	835 lm	835 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 5345	<input type="checkbox"/> 2.700K 5351
	<input type="checkbox"/> 3.000K 5346	<input type="checkbox"/> 3.000K 5352
	<input checked="" type="checkbox"/> 2.700K 5348	<input checked="" type="checkbox"/> 2.700K 5354
	<input checked="" type="checkbox"/> 3.000K 5349	<input checked="" type="checkbox"/> 3.000K 5355





3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | PF >0,6 | CRI ≥90 | 83° | 50/60 Hz | +40°C / -20°C | 1/5



Volt round 1

Volt square 1



*Included surface base (mounted) and recessed base (not mounted).

Technical Information

Power	8W	8W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5041 <input checked="" type="checkbox"/> 5042 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 5043 <input checked="" type="checkbox"/> 5044 <input checked="" type="checkbox"/> Custom RAL





ⓘ Consult delivery terms and conditions.




Volt round 3

Volt square 3

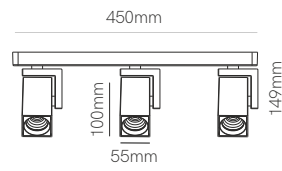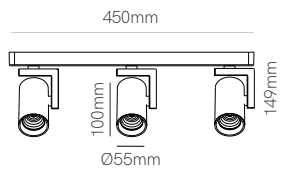

Technical Information

Power	24W	24W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.700 lm	1.700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5045 <input checked="" type="checkbox"/> 5046 <input type="checkbox"/> Custom RAL	<input type="checkbox"/> 5047 <input checked="" type="checkbox"/> 5048 <input type="checkbox"/> Custom RAL





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | 38° | IK06 | 50/60 Hz | +45°C / -20°C | CCT SWITCH | 1/10



Volt round 1 GU10

Volt square 1 GU10

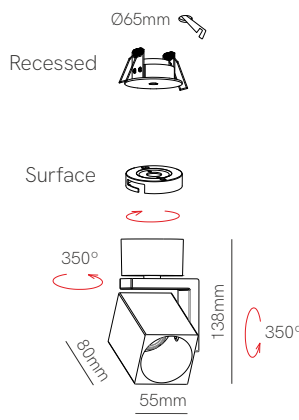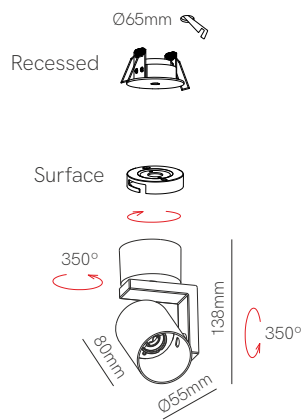


*Included surface base (mounted) and recessed base (not mounted).

Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5049 <input checked="" type="checkbox"/> 5050 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 5051 <input checked="" type="checkbox"/> 5052 <input checked="" type="checkbox"/> Custom RAL





ⓘ Consult delivery terms and conditions.



Volt round 3 GU10

Volt square 3 GU10

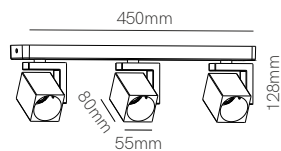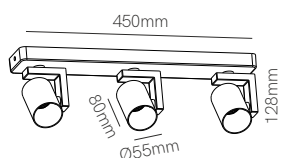

Technical Information

Installation	Surface
Material	Aluminium
Finishes	White / Black


Surface	Surface
Aluminium	Aluminium
White / Black	White / Black

Surface	Surface
Aluminium	Aluminium
White / Black	White / Black

Code	<input type="checkbox"/> 5053 <input checked="" type="checkbox"/> 5054 <input checked="" type="checkbox"/> Custom RAL
------	-----------------------------------------------------------------------------------------------------------------------------

Code	<input type="checkbox"/> 5055 <input checked="" type="checkbox"/> 5056 <input checked="" type="checkbox"/> Custom RAL
------	-----------------------------------------------------------------------------------------------------------------------------

Code	<input type="checkbox"/> 5055 <input checked="" type="checkbox"/> 5056 <input checked="" type="checkbox"/> Custom RAL
------	-----------------------------------------------------------------------------------------------------------------------------



ⓘ Consult delivery terms and conditions.







Tot 40W



Tot 60W

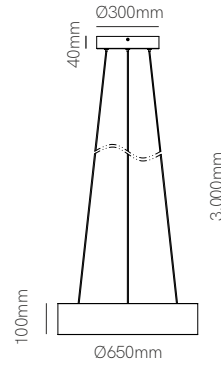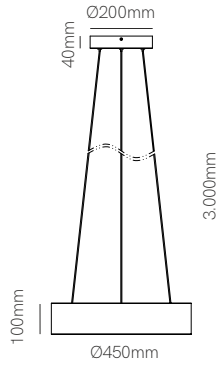

*Need Tuya Smart App to work.



Technical Information

Power	40W	60W
Installation	Surface / Pendant	Surface / Pendant
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.400 lm	5.900 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4902 <input checked="" type="checkbox"/> 4903 <input checked="" type="checkbox"/> Custom RAL <input checked="" type="checkbox"/> Electrolytic Plating	<input type="checkbox"/> 4904 <input checked="" type="checkbox"/> 4905 <input checked="" type="checkbox"/> Custom RAL <input checked="" type="checkbox"/> Electrolytic Plating

Consult delivery terms and conditions.

Accessories



*See page 8 for Gateway additional info.

*Included recessed base (not mounted) and surface base (mounted).

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | +50°C -20°C | | 1




Rubyc dimmable

Rubyc



Technical Information

Power	14W	14W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.205 lm	1.205 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5069 <input checked="" type="checkbox"/> 5070 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4230-N <input checked="" type="checkbox"/> 4231-N <input checked="" type="checkbox"/> Custom RAL






ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI >97 | 40° | 50/60 Hz | +40°C / -10°C | CCT SWITCH | AKZO NOBEL | 1/4/12

Mini rubyc dimmable


Mini rubyc

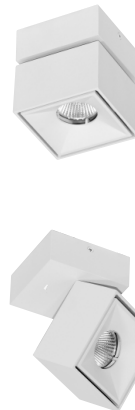

Technical Information


Power	7W	7W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	850 lm	850 lm
Material	Aluminium	Aluminium
Finishes	White / Black	Black


Code	<input type="checkbox"/> 4332-N <input checked="" type="checkbox"/> 4333-N <input checked="" type="checkbox"/> Custom RAL	<input checked="" type="checkbox"/> 4333 <input checked="" type="checkbox"/> Custom RAL
------	---------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | +40°C / -20°C | CCT SWITCH | AKZO NOBEL | 1/30

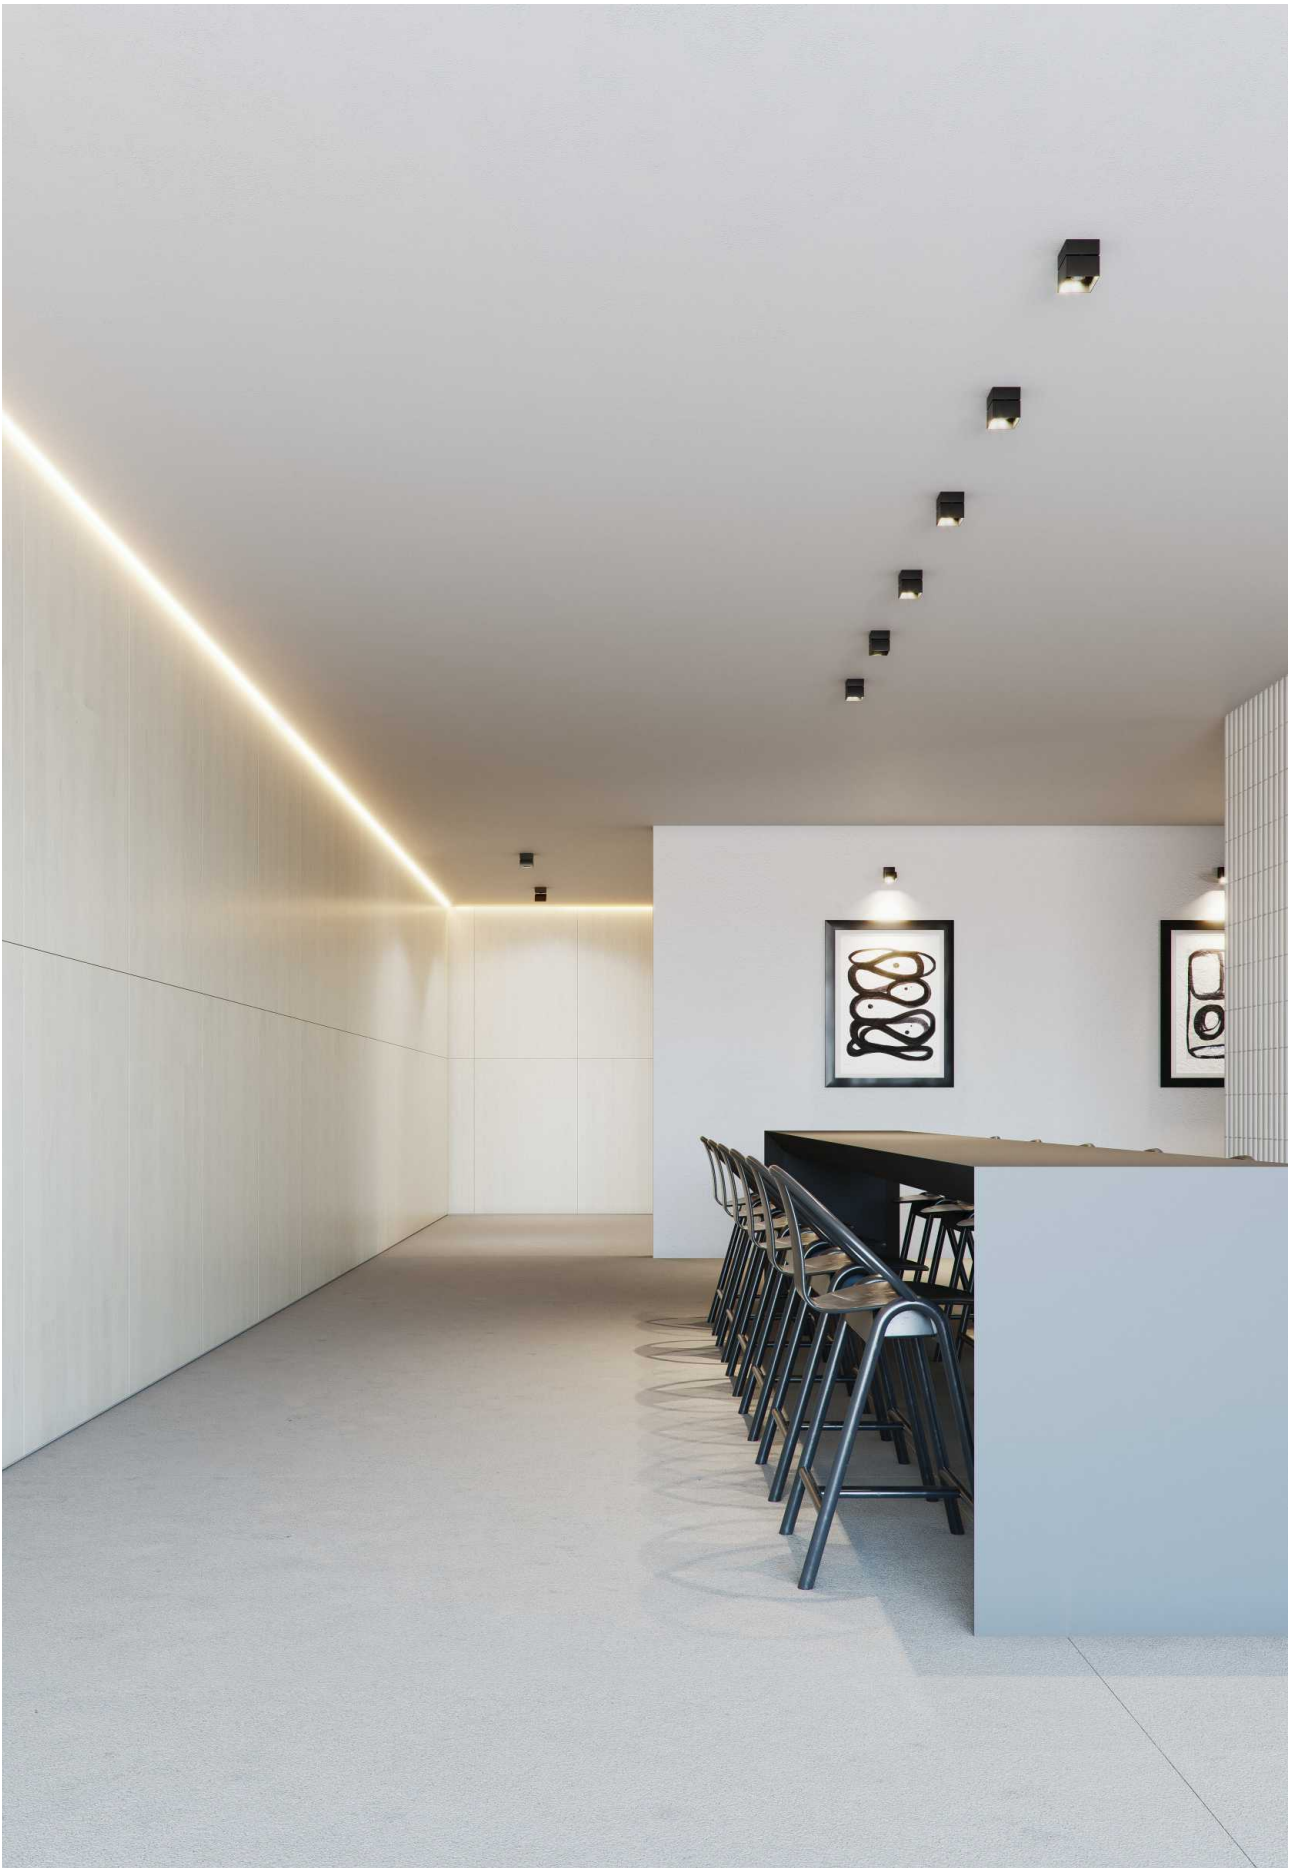

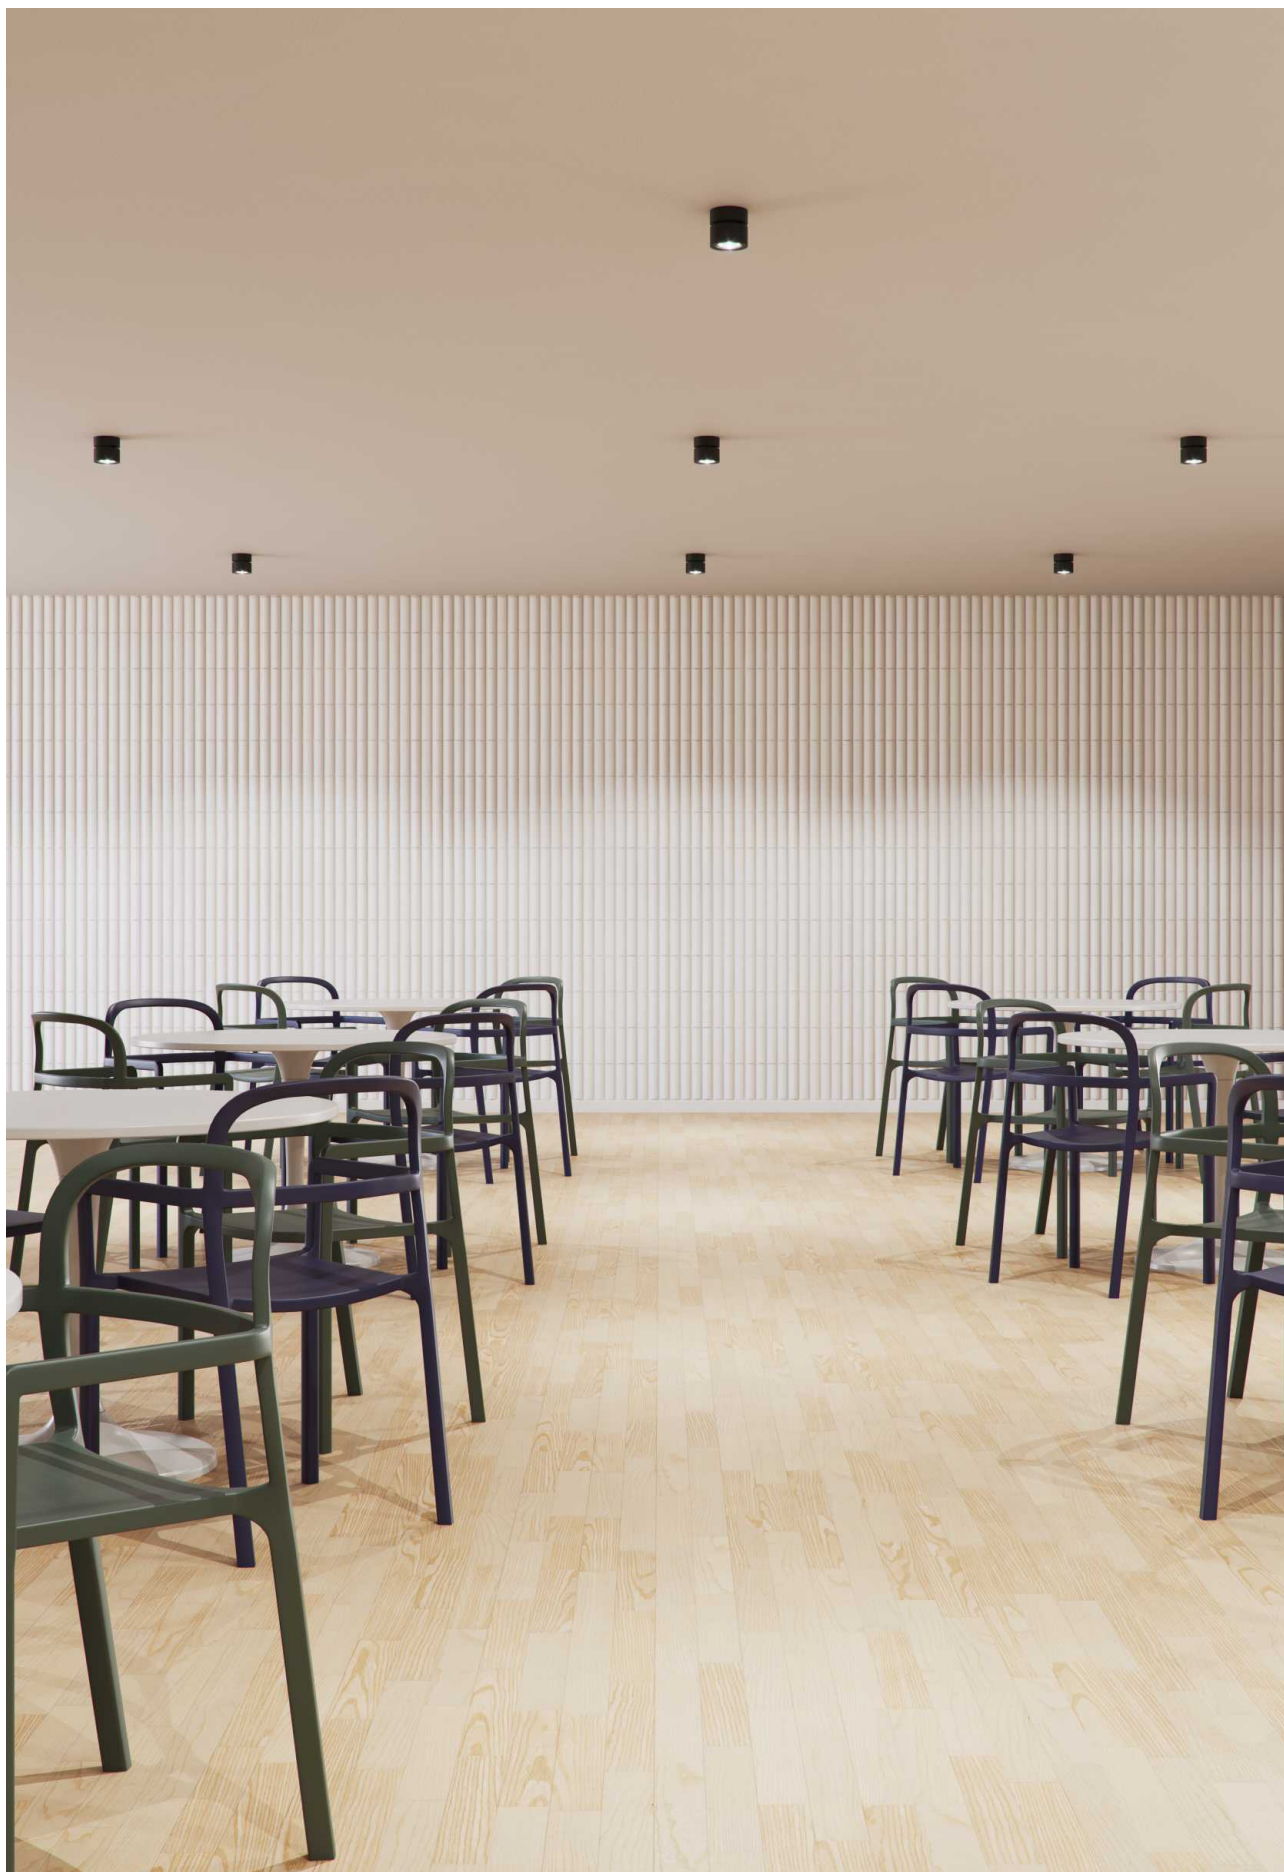



Concord dimmable




Technical Information

Power	14W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.205 lm
Material	Aluminium
Finishes	White / Black


Code	<input type="checkbox"/> 5071
	<input type="checkbox"/> 5072
	 Custom RAL



 Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥97 |  | 40°  | 50/60 Hz |  +40°C / -10°C |  TRIAC DIMM |  CCT SWITCH | AKZO NOBEL |  1/4/12


Mini concord dimmable



Technical Information

Power	7W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	850 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 4334-N
	<input type="checkbox"/> 4335-N
	<input checked="" type="checkbox"/> Custom RAL




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | +40°C / -20°C | TRIAC DIMM | CCT SWITCH | AKZO NOBEL | 1/30





Plus



Technical Information

Power	8W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.040 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 4522
	<input type="checkbox"/> 4523
	Custom RAL




Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 15° 35° 60° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20




New

Argo

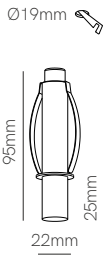

Argo large




Argo flat



Technical Information

Power	3,5W	3,5W	2W
Installation	Recessed	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm	80 lm
Material	Aluminium and acrylic	Aluminium and acrylic	Aluminium and acrylic
Finishes	White / Black	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 5246	<input type="checkbox"/> 2.700K 5252	<input type="checkbox"/> 2.700K 5258
	<input type="checkbox"/> 3.000K 5247	<input type="checkbox"/> 3.000K 5253	<input type="checkbox"/> 3.000K 5259
	<input type="checkbox"/> 4.000K 5248	<input type="checkbox"/> 4.000K 5254	<input type="checkbox"/> 4.000K 5260
	<input checked="" type="checkbox"/> 2.700K 5249	<input checked="" type="checkbox"/> 2.700K 5255	<input checked="" type="checkbox"/> 2.700K 5261
	<input checked="" type="checkbox"/> 3.000K 5250	<input checked="" type="checkbox"/> 3.000K 5256	<input checked="" type="checkbox"/> 3.000K 5262
	<input checked="" type="checkbox"/> 4.000K 5251	<input checked="" type="checkbox"/> 4.000K 5257	<input checked="" type="checkbox"/> 4.000K 5263






3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥90 | 180° | 50/60 Hz | +40°C / -20°C | 1/100



Mac wall 120mm

Mac wall 180mm

Mac wall 250mm



*Included 33mm base, optional 53mm base.

Technical Information

Power	6W	15W	20W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	1.500 lm	2.000 lm
Material	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)
Finishes	White / Black / Wood / Corten	White / Black / Wood / Corten	White / Black / Wood / Corten
Code	<input type="checkbox"/> 4995 <input type="checkbox"/> 4996 <input type="checkbox"/> 4997 <input type="checkbox"/> 5218 New <input type="checkbox"/> Custom RAL	<input type="checkbox"/> 4998 <input type="checkbox"/> 4999 <input type="checkbox"/> 5000 <input type="checkbox"/> 5219 New <input type="checkbox"/> Custom RAL	<input type="checkbox"/> 5001 <input type="checkbox"/> 5002 <input type="checkbox"/> 5003 <input type="checkbox"/> 5220 New <input type="checkbox"/> Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories **New**

53mm Large base for 120mm


5226 5228
 5227 5229

53mm Large base for 180mm

5230 5232
 5231 5233

53mm Large base for 250mm

5234 5236
 5235 5237






3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C / -20°C | CCT SWITCH | 1/10



One wall



One wall dual



*GU10 Bulbholder included.



Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Bulbholder	50mm GU10	50mm GU10
Code	<input type="checkbox"/> 5006 <input type="checkbox"/> 5007 <input type="checkbox"/> 5008 <input type="checkbox"/> Custom RAL	<input type="checkbox"/> 5009 <input type="checkbox"/> 5010 <input type="checkbox"/> 5011 <input type="checkbox"/> Custom RAL





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20



Zio wall

Zio wall dual

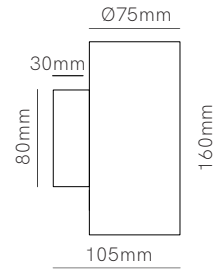

*GU10 Bulbholder included.



Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Bulbholder	50mm GU10	50mm GU10
Code	<input type="checkbox"/> 5012 <input type="checkbox"/> 5013 <input type="checkbox"/> 5014 <input type="checkbox"/> Custom RAL	<input type="checkbox"/> 5015 <input type="checkbox"/> 5016 <input type="checkbox"/> 5017 <input type="checkbox"/> Custom RAL



ⓘ Consult delivery terms and conditions.







Icon 7W




Icon 12W



Technical Information

Power	7W	12W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.320 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 4383 <input type="checkbox"/> 4384 <input type="checkbox"/> 4385 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4386 <input type="checkbox"/> 4387 <input type="checkbox"/> 4388 <input checked="" type="checkbox"/> Custom RAL




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,5 | CRI ≥90 | 120° | 50/60 Hz | +50°C / -20°C | CCT SWITCH | 1/12



New

Tron

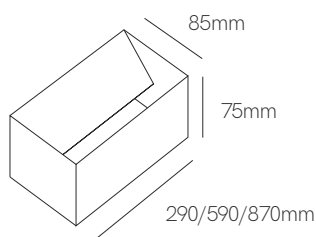


Technical Information

Power	8W / 16W / 24W
Lumens	720 lm - 2.400 lm
Installation	Wall
Material	Aluminium

Code	Diffuser	Size (X)	CCT (Lm/W) - Power/m	Driver	Colour
Code 9	Opal 7	290mm 1	2.700K (60 lm/W) - 29W/m 2	Triac 4	<input type="checkbox"/> White (9003) 1
		590mm 2	3.000K (65 lm/W) - 29W/m 3		<input checked="" type="checkbox"/> Black (9005) 2
		870mm 3	4.000K (70 lm/W) - 29W/m 4		<input type="checkbox"/> Custom RAL C

Code: **9** **7** **4**





Consult delivery terms and conditions.
*Create your code according to your preferences.






New

Sphere wall

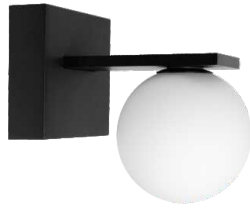

Sphere Alp wall

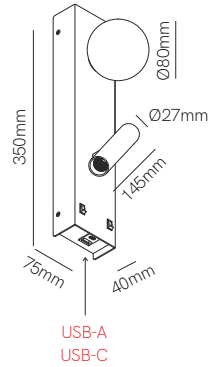


Technical Information

Power	9W	20W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	465 lm	680 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 5333	<input type="checkbox"/> 2.700K 5339
	<input type="checkbox"/> 3.000K 5334	<input type="checkbox"/> 3.000K 5340
	<input checked="" type="checkbox"/> 2.700K 5336	<input checked="" type="checkbox"/> 2.700K 5342
	<input checked="" type="checkbox"/> 3.000K 5337	<input checked="" type="checkbox"/> 3.000K 5343

IP 54 | PF >0,6 | 360° | 1/12 | IP 20 | PF >0,9 | 360° | 36° | 1/6





3 YEARS WARRANTY | 30.000 HOURS | → | 220/240 VAC | UGR <19 | CRI ≥90 | | 50/60 Hz | +40°C / -20°C



New

Sweet usb-c

Sweet usb-a

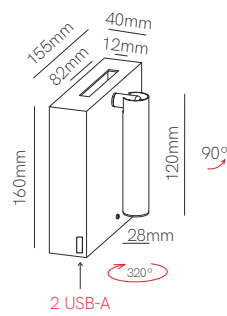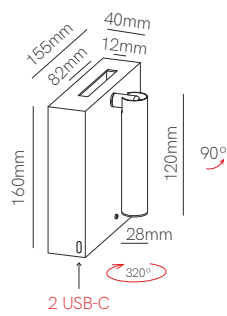

Technical Information

Power	4W	4W
Installation	Surface	Surface
Color Temperature	2.700K	2.700K
Lumens	150 lm / 90 lm / 40 lm	150 lm / 90 lm / 40 lm
Material	Aluminium	Aluminium
Finishes	White / Black	Black
Code	<input type="checkbox"/> 5155 <input checked="" type="checkbox"/> 5156	<input checked="" type="checkbox"/> 4175

USB-C | 5V 2A | CRI ≥90

USB-A | 5V 2A | CRI ≥80





*Charger by induction and USB.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,4 | 20° | 5W | 50/60 Hz | 3 INTENSITIES | +40°C / -20°C | 1/10



New

Beam



Technical Information

Power	5W
Installation	Surface
Color Temperature	2.700K
Lumens	380 lm / 190 lm / 95 lm
Material	Aluminium
Finishes	White / Black
Code	<input type="checkbox"/> 5157 <input checked="" type="checkbox"/> 5158




*Charger by USB-C.





New

Pure

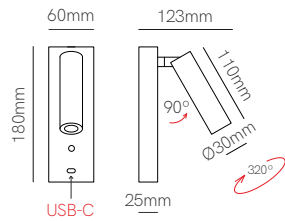

Technical Information

Power	4W
Installation	Surface
Color Temperature	2.700K
Lumens	155 lm / 80 lm / 40 lm
Material	Aluminium
Finishes	White / Black
Code	<input type="checkbox"/> 5159 <input checked="" type="checkbox"/> 5160





*Charger by USB.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | USB-C 5V 2A | CRI ≥90 | 30° | 50/60 Hz | 3 INTENSITIES | +40°C / -20°C | 1/20



New

Oma




Technical Information

Power	8W
Installation	Surface
Color Temperature	3.000K
Lumens	144 lm
Material	Aluminium and glass
Finishes	White / Amber / Turquoise

Code	<input type="checkbox"/> 5381
	<input type="checkbox"/> 5382
	<input type="checkbox"/> 5383






3 YEARS WARRANTY | 35.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | | | 50/60 Hz | | +40°C / -20°C |

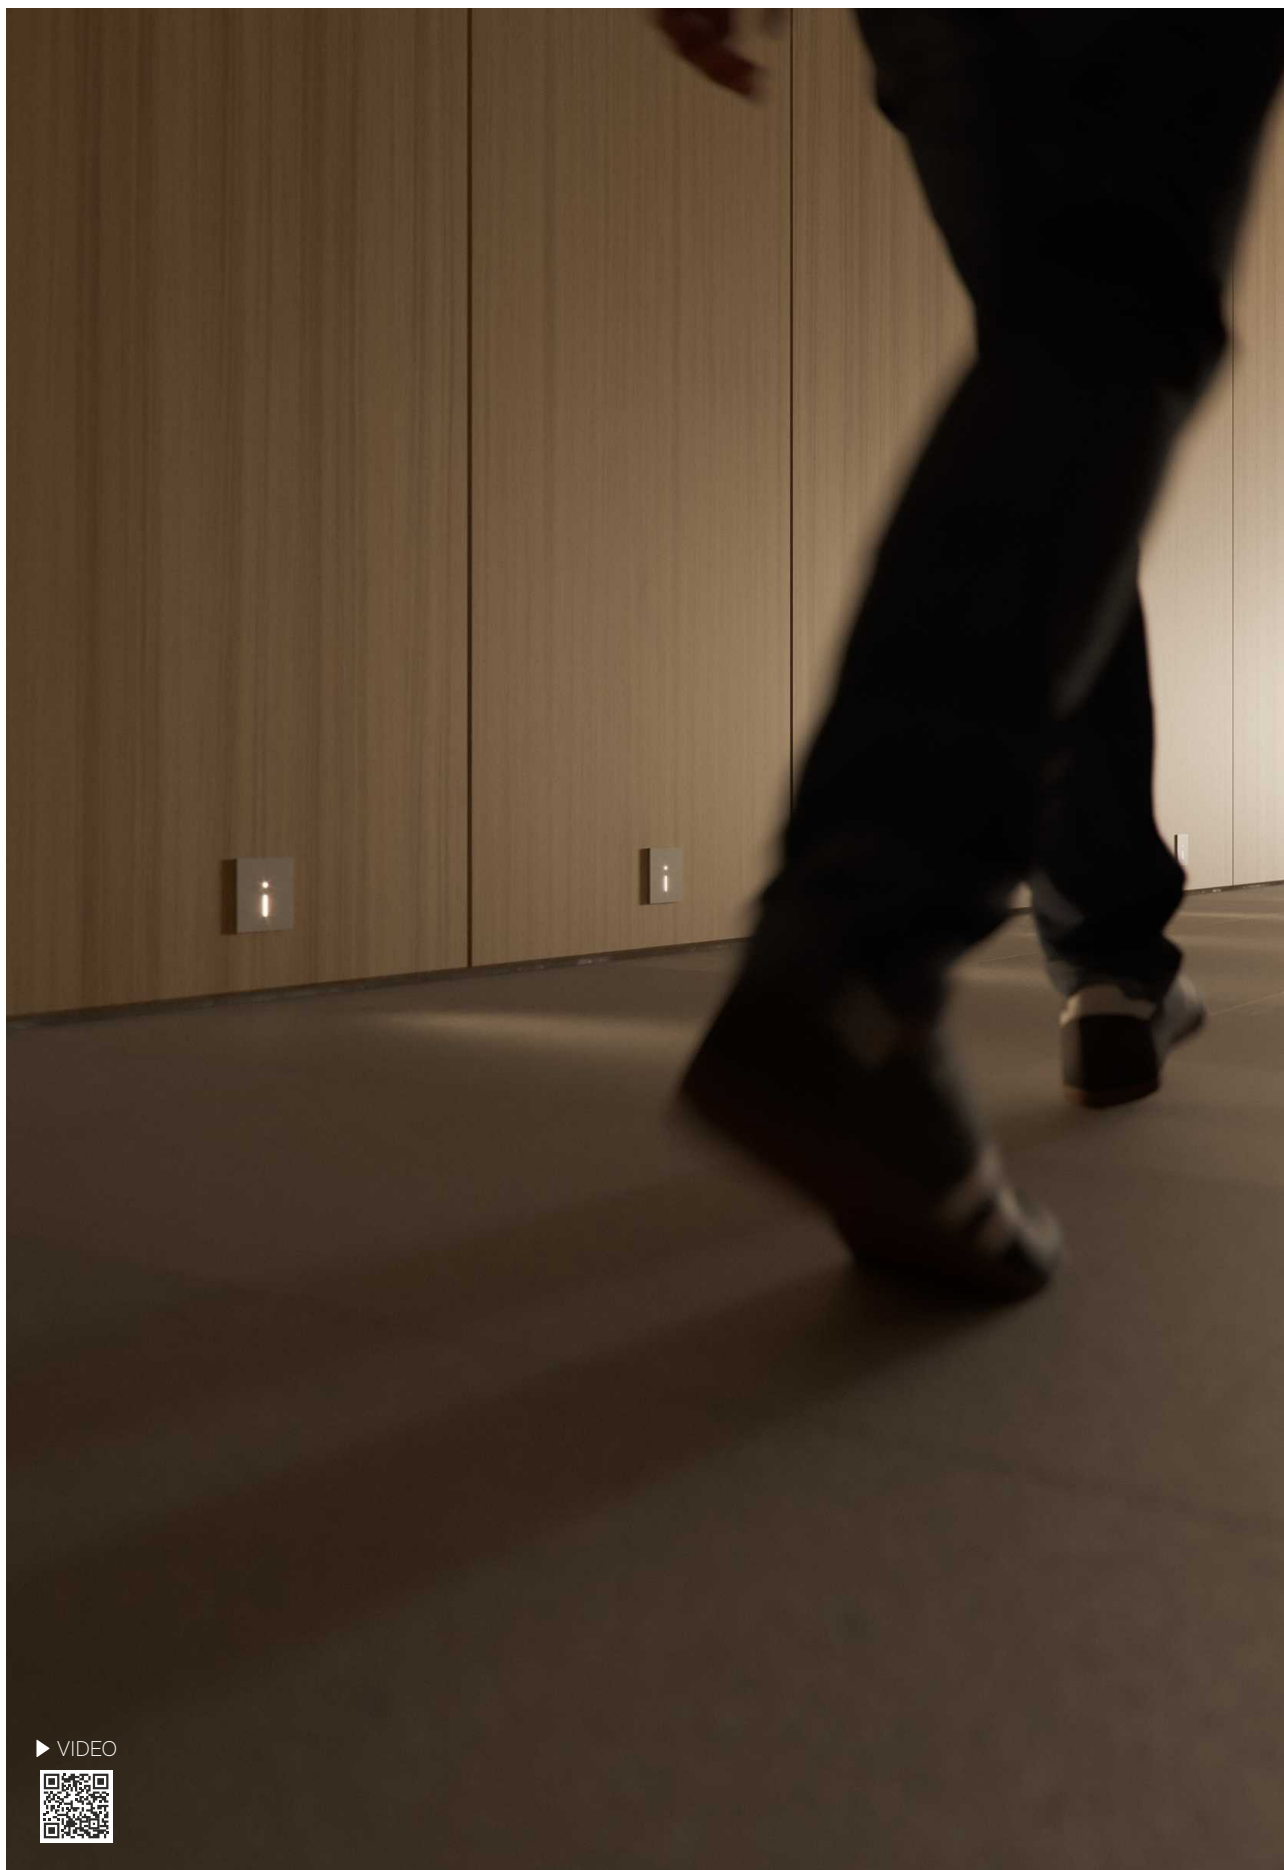

▶ VIDEO



Lao



Recessed box included
66mm x Ø73mm



White and black cover included




*Recessed box, white and black cover included.

Technical Information



Power	1,5W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	20 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> <input type="checkbox"/> 5027 <input type="checkbox"/> Custom RAL
------	-----------------------------------------------------------------------------------------------




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 175/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | +45°C / -20°C | 6-8m | ON/OFF | OFF 30 sec | CCT SWITCH | 1/50

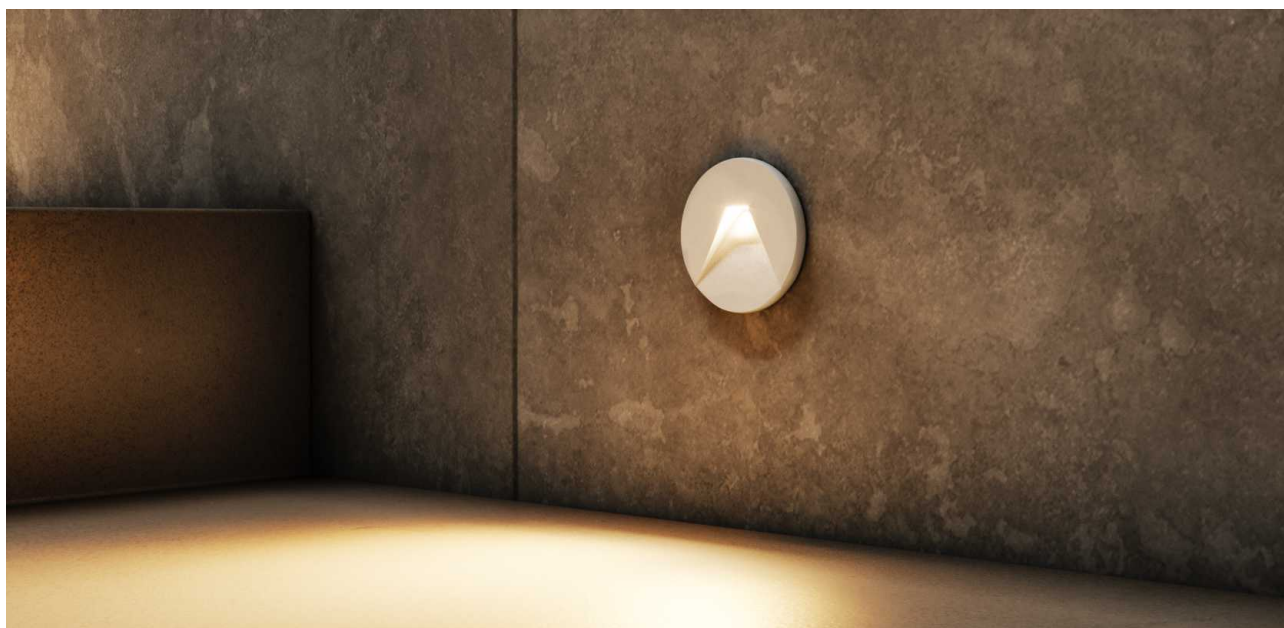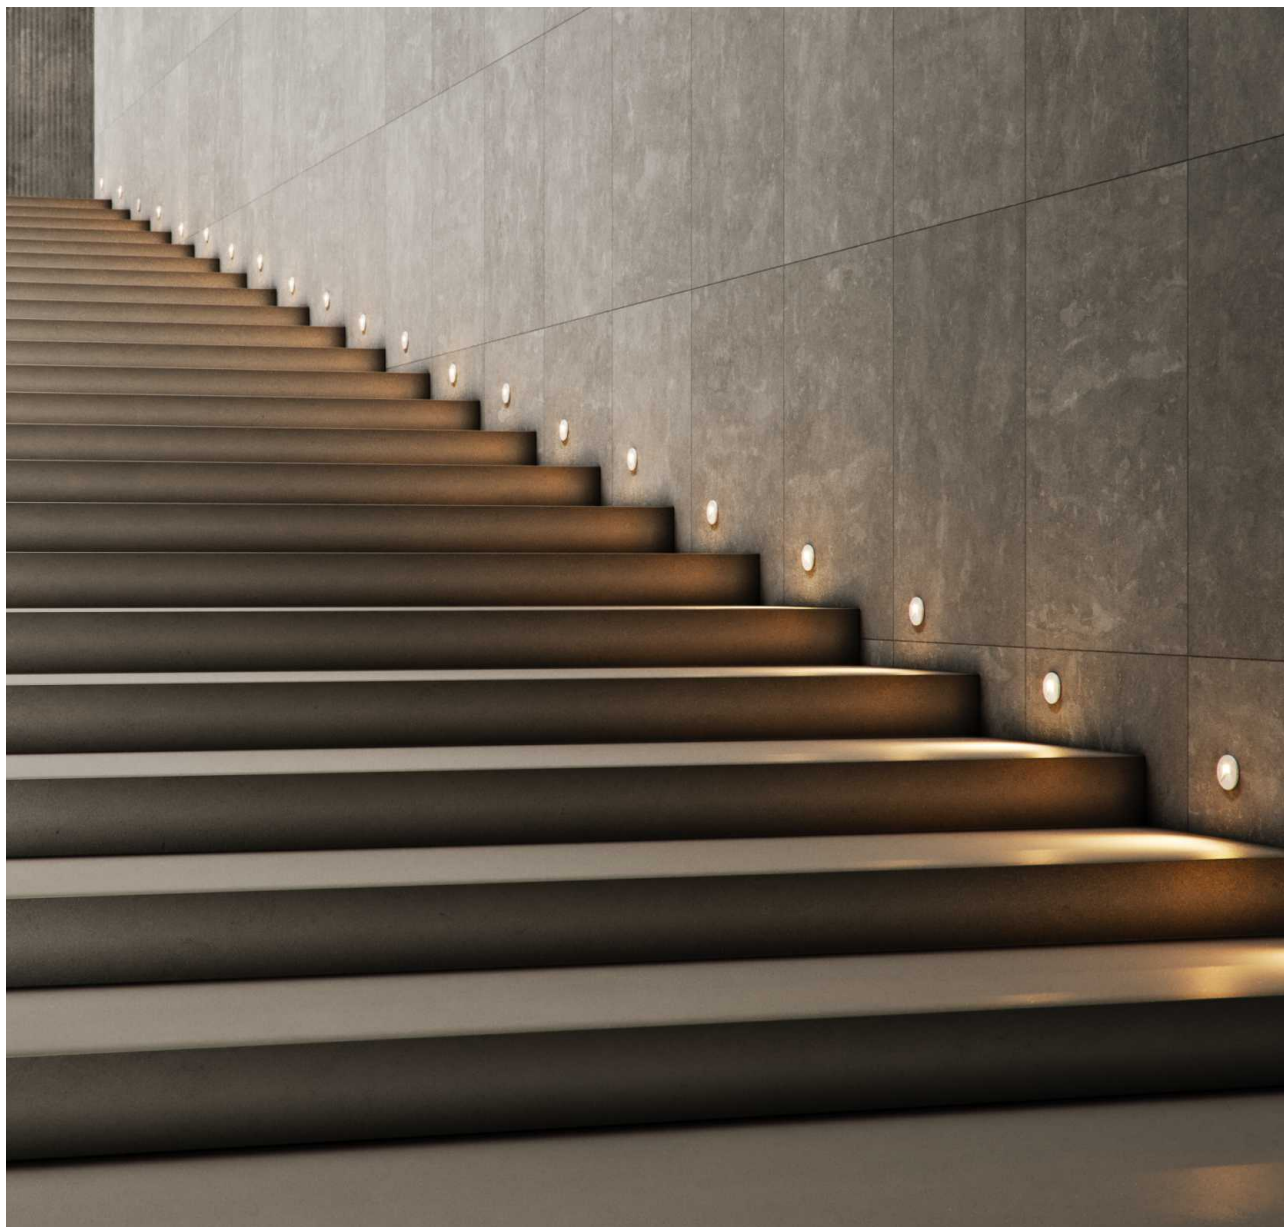

Pun

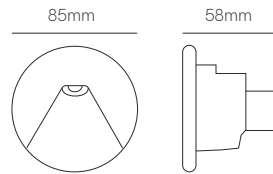

Ø73mm



Recessed box included
66mm x Ø73mm



White and black cover included



*Recessed box, white and black cover included.

Technical Information


Power	3W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	65 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> <input type="checkbox"/> 5029
	Custom RAL







Consult delivery terms and conditions.

3 YEARS WARRANTY |
 25.000 HOURS |
 IP 20 |
 175/265 VAC |
 PF >0,4 |
 CRI ≥80 |
 38° |
 50/60 Hz |
 IK07 |
 +45°C / -20°C |
 CCT SWITCH |
 1/50

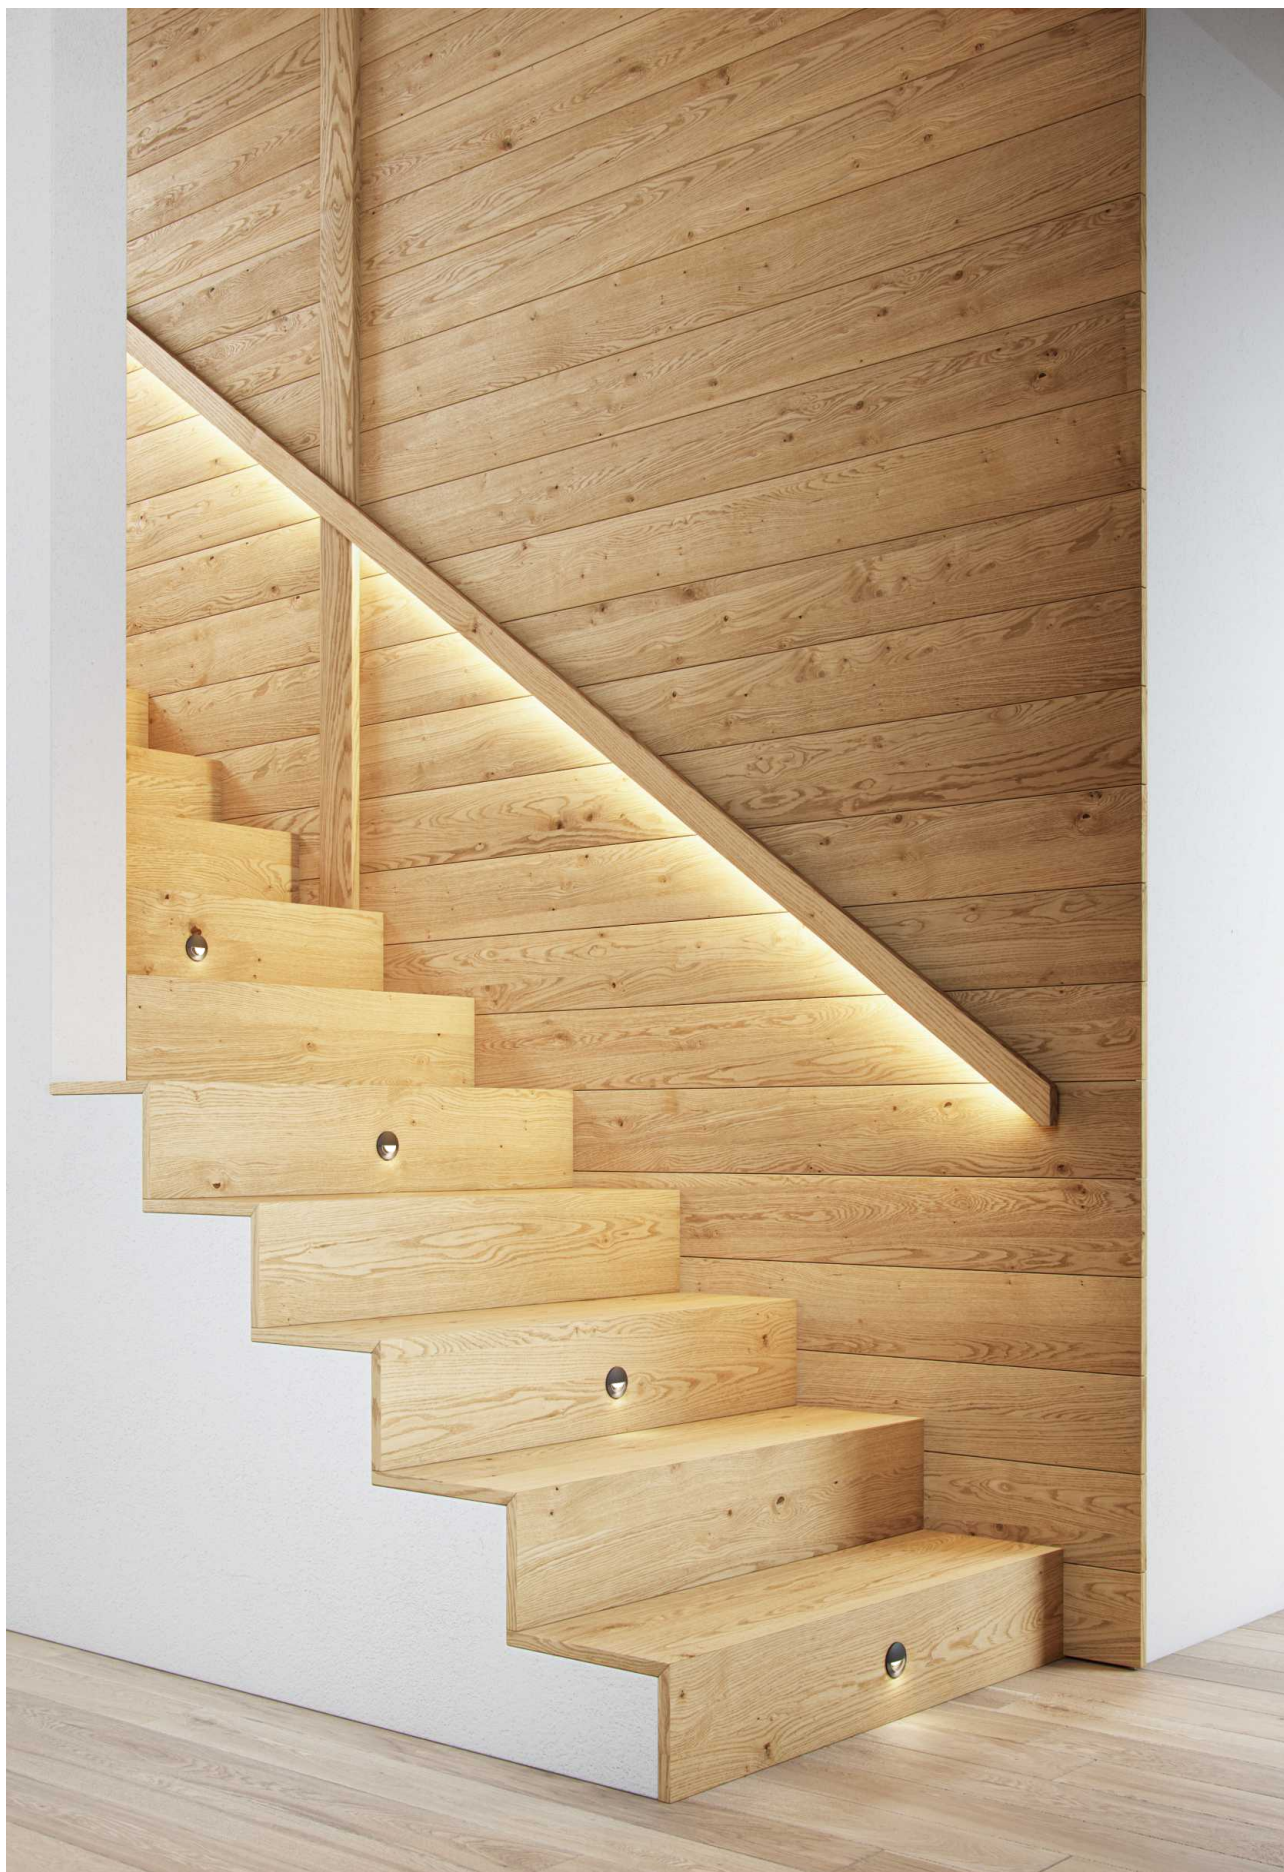

Ilo

Skin



*Recessed box included.



Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.000K	3.000K
Lumens	60 lm	60 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4126 <input type="checkbox"/> 4127 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4108 <input type="checkbox"/> 4109 <input checked="" type="checkbox"/> Custom RAL






ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK07 | +50°C / -20°C | 1/50

Port

Grow

Steps

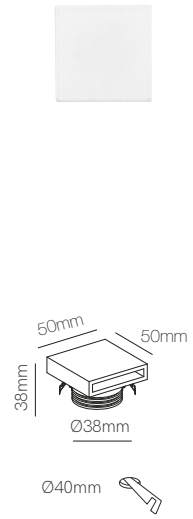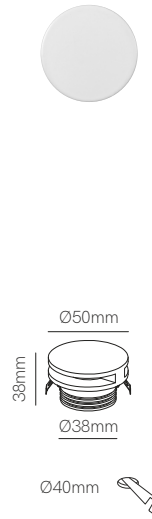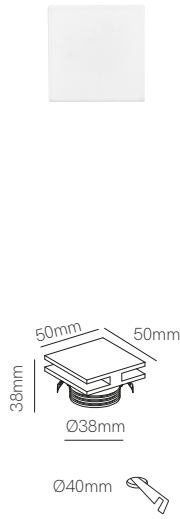

*Recessed box included.


Technical Information

Power	4W	4W	4W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	60 lm	60 lm	60 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	<input type="checkbox"/> 4112 <input type="checkbox"/> 4113 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4106 <input type="checkbox"/> 4107 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4110 <input type="checkbox"/> 4111 <input checked="" type="checkbox"/> Custom RAL
	120°	120°	120°




Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | | 50/60 Hz | | +50°C / -20°C |

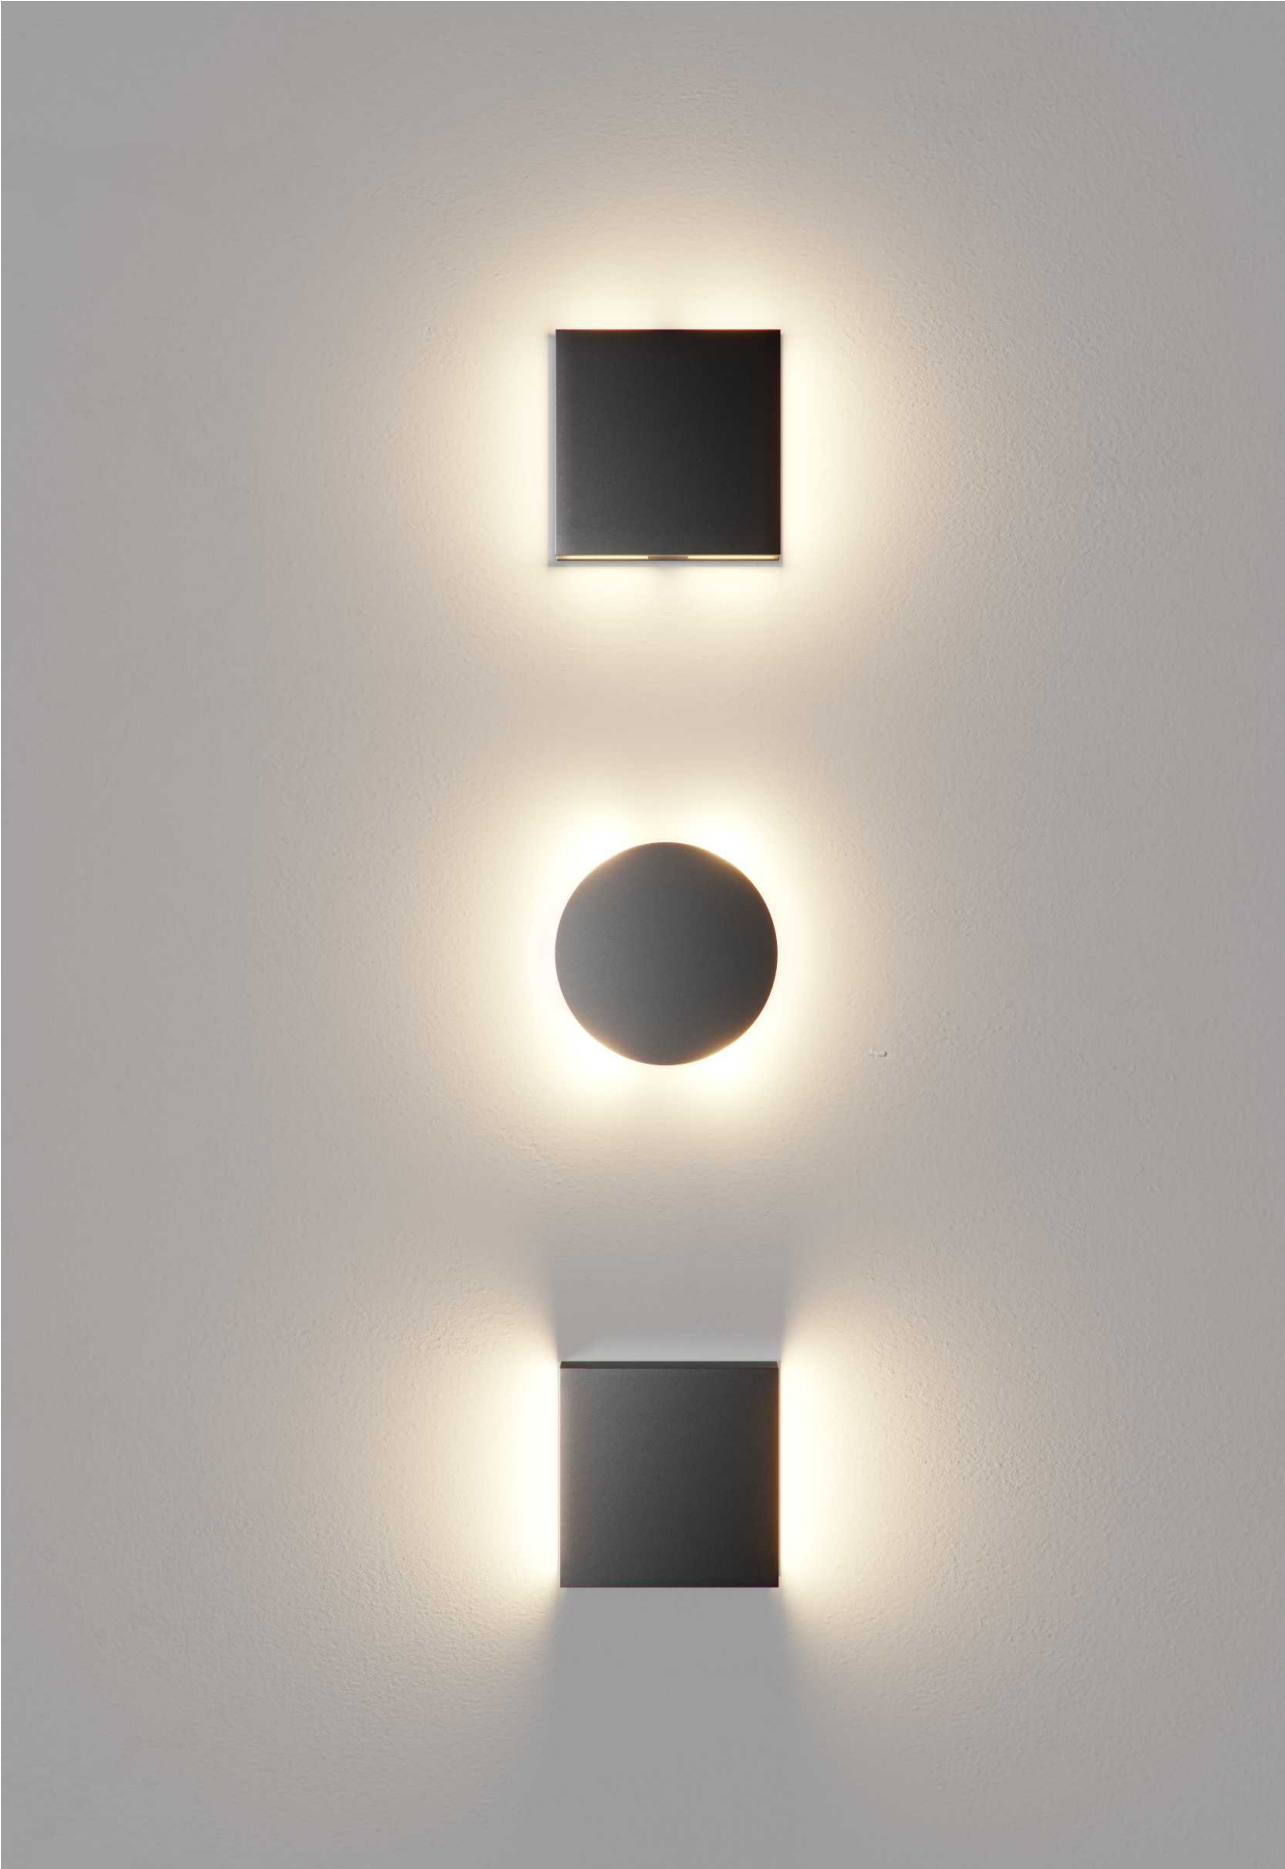



Stem

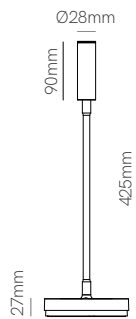

Technical Information

Power	5W
Installation	Desktop
Color Temperature	2.700K
Lumens	175 lm
Material	Aluminium and polycarbonate
Finishes	White / Black
Code	<input type="checkbox"/> 4979 <input checked="" type="checkbox"/> 4981



3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,45 | CRI ≥90 | 30° | 5W (⚡) | 50/60 Hz | IK06 | +50°C / -20°C | 1/20




▶ VIDEO



New


Bag

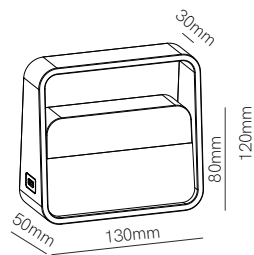

Technical Information

Power	2W
Installation	Portable
Color Temperature	3.000K
Lumens	50 lm
Material	Aluminium
Finishes	White / Black / Brushed Gold / Champagne

Code	<input type="checkbox"/> 5329
	<input type="checkbox"/> 5330
	<input type="checkbox"/> 5331
	<input type="checkbox"/> 5332



3 YEARS WARRANTY BATTERY 2 YEARS | 30.000 HOURS | 2,5 HOURS | 3,5 HOURS | USB-C 5V | 1.800 mAh | IP 20 | CRI ≥90 | 180° | DIMMABLE | IK06 | +40°C -20°C | 1/20




▶ VIDEO



New

Bimba

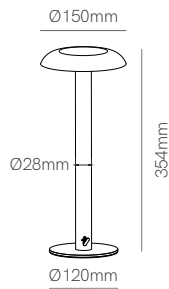

Technical Information

Power	2W
Installation	Portable
Color Temperature	Switch 2.000K / 3.100K / 5.000K
Lumens	118 lm
Material	Aluminium
Finishes	White / Brushed Gold / Champagne
Code	<input type="checkbox"/> 5325 <input type="checkbox"/> 5327 <input type="checkbox"/> 5328

CE RoHS

3 YEARS WARRANTY BATTERY 1 YEAR |
 9.000 HOURS |
 3,5 HOURS |
 5 HOURS |
 USB-C 5V |
 3.000 mAh |
 IP 65 |
 CRI ≥80 |
 110° |
 DIMMABLE |
 IK04 |
 +40°C / -20°C |
 CCT SWITCH |
 |
 1/8








Converse lighting




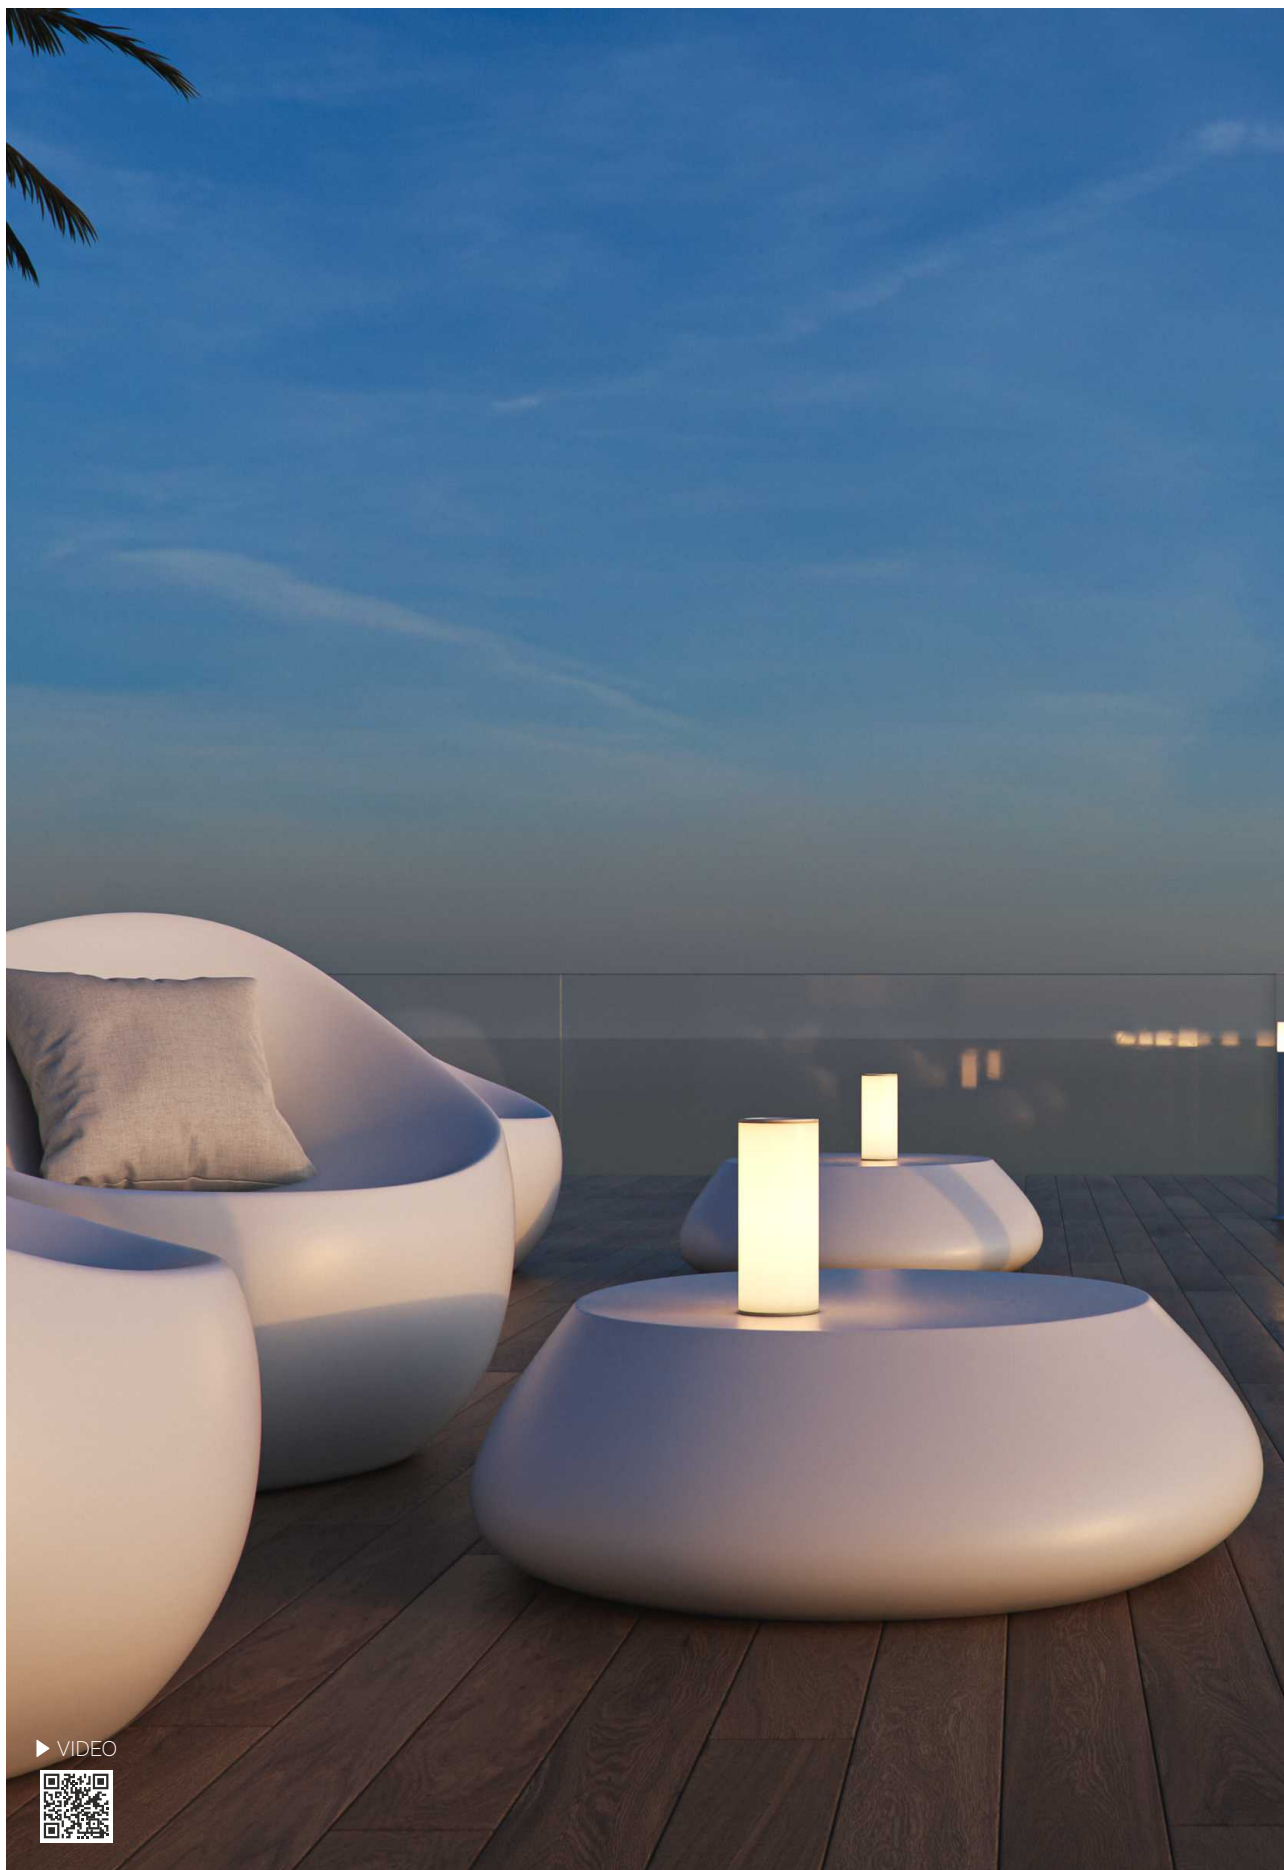

▶ VIDEO




Converse lighting

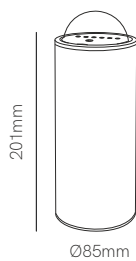

Technical Information

Power	2,5W
Installation	Portable
Color Temperature	2.700K / 5.000K
Lumens	225 lm
Finishes	White
Code	<input type="checkbox"/> 3916-N



3 YEARS WARRANTY BATTERY 2 YEARS | 50.000 HOURS | 5-6 HOURS | 4-150 HOURS | MICRO USB 5V | 2.200 mAh | IP 20 | CRI ≥82 | 360° | DIMMABLE | +40°C -20°C | 1/15