



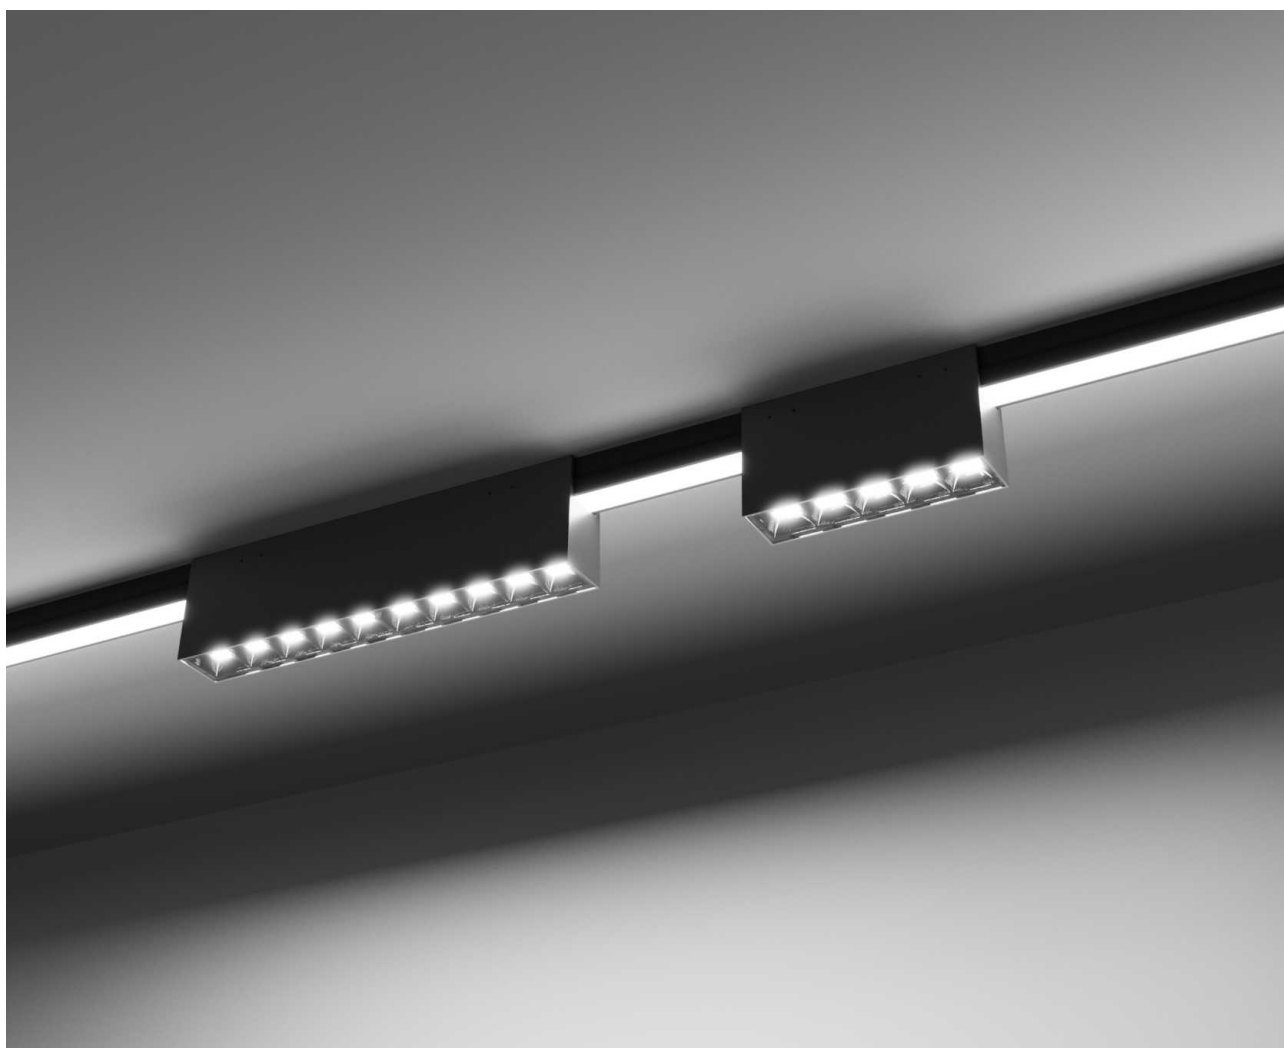

# Outdoor



**BENEITO FAURE**  
passion for led light

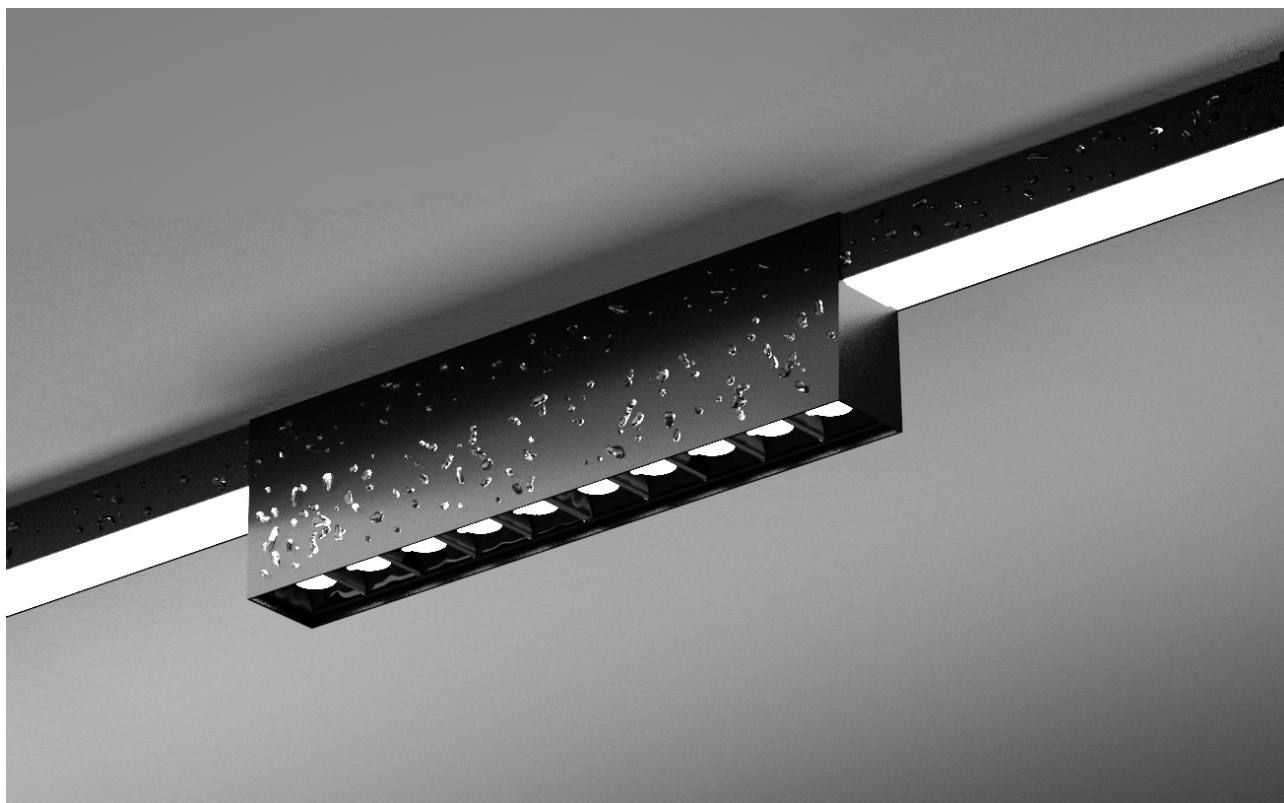

New

Ice 5

Ice 10

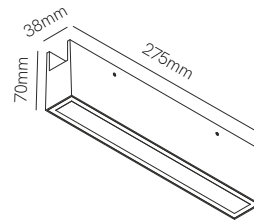

\*Need power supply (page 408).




Technical Information

Power	10W	20W
Installation	Outdoor Track	Outdoor Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	685 lm	1.110 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K	5384	<input type="checkbox"/> 2.700K	5388
	<input type="checkbox"/> 3.000K	5385	<input type="checkbox"/> 3.000K	5389
	<input checked="" type="checkbox"/> 2.700K	5386	<input checked="" type="checkbox"/> 2.700K	5390
	<input checked="" type="checkbox"/> 3.000K	5387	<input checked="" type="checkbox"/> 3.000K	5391

1/40


1/20



3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | III | 45° | IK06 | +45°C / -20°C

New

Atmos track

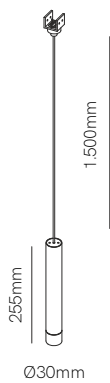

\*Need power supply (page 408).

Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	510 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	2.700K	5392
	<input type="checkbox"/>	3.000K	5393
	<input checked="" type="checkbox"/>	2.700K	5394
	<input checked="" type="checkbox"/>	3.000K	5395




3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | III | 38° | IK06 | +45°C / -20°C | 1/20



New

Bit



\*Need power supply (page 408).

### Technical Information


Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	630 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	2.700K	5396
	<input type="checkbox"/>	3.000K	5397
	<input checked="" type="checkbox"/>	2.700K	5398
	<input checked="" type="checkbox"/>	3.000K	5399



3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | III | 55° | IK06 | +45°C / -20°C | 1/20


New

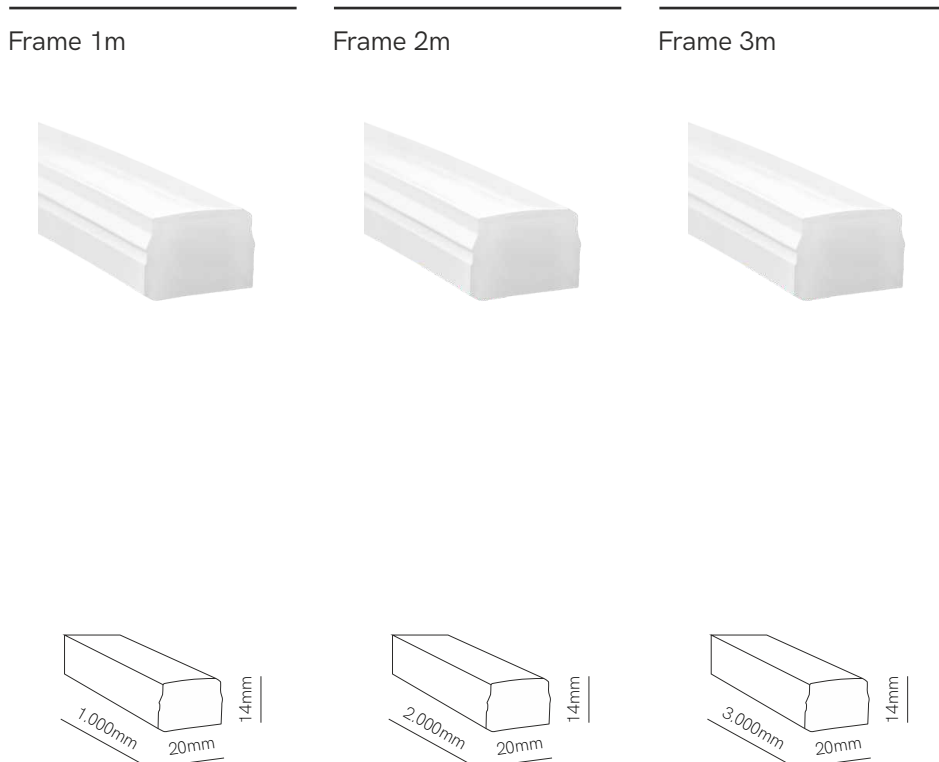

\*Need power supply (page 408).


Technical Information

Power	10W	20W	30W
Installation	Outdoor Track	Outdoor Track	Outdoor Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	680 lm	1.400 lm	2.055 lm
Material	Silicone	Silicone	Silicone
Code	<input type="checkbox"/> 2.700K 5400 <input type="checkbox"/> 3.000K 5401	<input type="checkbox"/> 2.700K 5402 <input type="checkbox"/> 3.000K 5403	<input type="checkbox"/> 2.700K 5404 <input type="checkbox"/> 3.000K 5405



3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | CRI ≥90 | III | 100° | 125mm | IK06 | +45°C / -20°C | 1/15

# Outdoor track accessories New

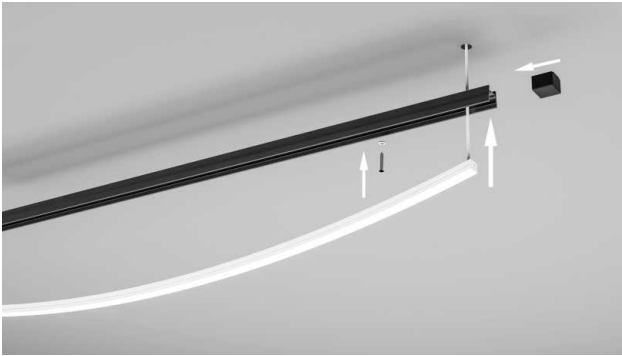

## Outdoor Track

W: 26mm H: 25mm

- 5406 1m
- 5407 2m
- 5408 3m
- 5409 1m
- 5410 2m
- 5411 3m



## L joint ceiling

L: 70mm W: 70mm H: 26mm

- 5412
- 5413



## L joint wall ceiling

L: 70mm W: 70mm H: 30mm

- 5425
- 5426



## Linear joint

L: 100mm W: 30mm H: 26mm

- 5414
- 5415



## End cap

L: 62mm W: 30mm H: 26mm

- 5416
- 5417



## Waterproof silicone cover

L: 20mm W: 14mm H: 4mm



- 5418

Power supplies 48V (page 408).



Mac 30

Mac 60

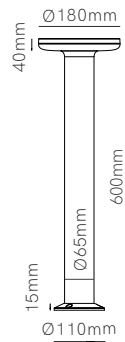

Technical Information

Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	890 lm / 900 lm	890 lm / 900 lm
Material	Aluminium and Polycarbonate	Aluminium and Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	<input type="checkbox"/> 3.000K 4837	<input type="checkbox"/> 3.000K 4843
	<input type="checkbox"/> 4.000K 4838	<input type="checkbox"/> 4.000K 4844
	<input checked="" type="checkbox"/> 3.000K 4839	<input checked="" type="checkbox"/> 3.000K 4845
	<input checked="" type="checkbox"/> 4.000K 4840	<input checked="" type="checkbox"/> 4.000K 4846
	<input checked="" type="checkbox"/> 3.000K 4841	<input checked="" type="checkbox"/> 3.000K 4847
	<input checked="" type="checkbox"/> 4.000K 4842	<input checked="" type="checkbox"/> 4.000K 4848


1/12

1/6




3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | IK06 | +50°C / -20°C



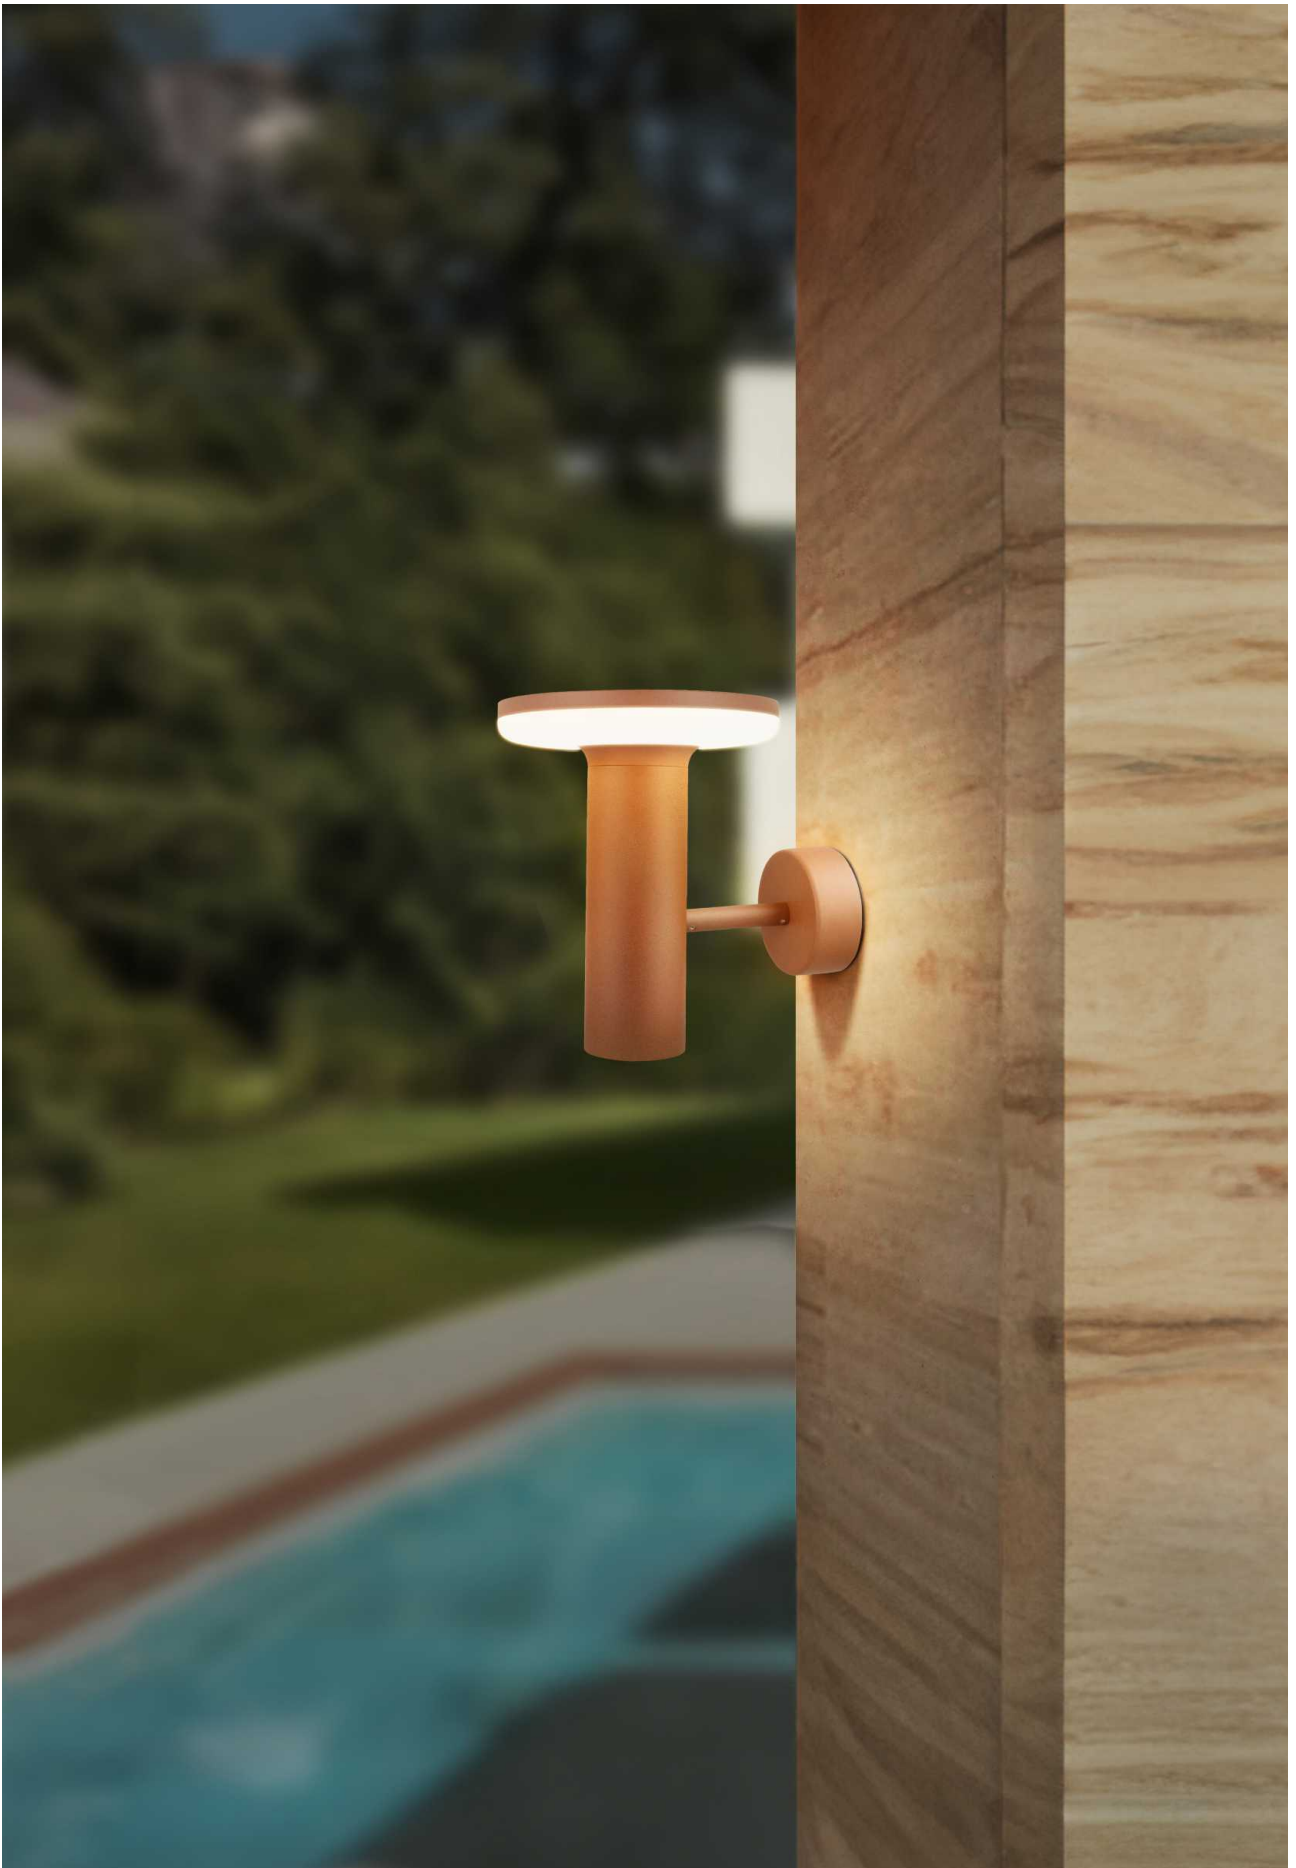

New

Mac wall base

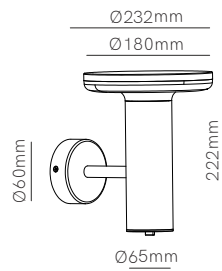

Technical Information

Power	12W
Installation	Wall
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.020 lm
Material	Aluminium and Polycarbonate
Finishes	White / Black / Corten

Code	<input type="checkbox"/> 5264
	<input checked="" type="checkbox"/> 5265
	<input type="checkbox"/> 5266




3 YEARS WARRANTY | 30.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 110° | 50/60 Hz | IK06 | +50°C / -20°C | CCT SWITCH | 1/6






Tura 30

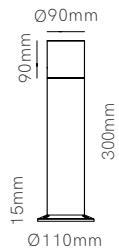

Tura 60

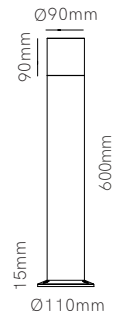

Technical Information

Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	950 lm / 960 lm	950 lm / 960 lm
Material	Aluminium and Methacrylate	Aluminium and Methacrylate
Finishes	White / Black / Corten	White / Black / Corten

Code	<input type="checkbox"/> 3.000K 4849	<input type="checkbox"/> 3.000K 4855
	<input type="checkbox"/> 4.000K 4850	<input type="checkbox"/> 4.000K 4856
	<input checked="" type="checkbox"/> 3.000K 4851	<input checked="" type="checkbox"/> 3.000K 4857
	<input checked="" type="checkbox"/> 4.000K 4852	<input checked="" type="checkbox"/> 4.000K 4858
	<input checked="" type="checkbox"/> 3.000K 4853	<input checked="" type="checkbox"/> 3.000K 4859
	<input checked="" type="checkbox"/> 4.000K 4854	<input checked="" type="checkbox"/> 4.000K 4860

1/6

1/4




3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 180° | 50/60 Hz | | +50°C / -20°C



Clos 8W


Clos 16W



Ø200mm



38mm



Ø200mm



38mm

\*Accessories (pages 562 and 563).



### Technical Information

Power	8W	16W
Installation	Surface / Floor	Surface / Floor
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.000 lm	2.100 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black / Corten	White / Black / Corten



Code	<input type="checkbox"/> 4876	<input type="checkbox"/> 4879
	<input checked="" type="checkbox"/> 4877	<input checked="" type="checkbox"/> 4880
	<input checked="" type="checkbox"/> 4878	<input checked="" type="checkbox"/> 4881



5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 175/265 VAC | PF >0,9 | CRI ≥80 | | 50/60 Hz | | +40°C / -25°C | CCT SWITCH | 1/20

Clos 8W base 30cm

Clos 16W base 30cm

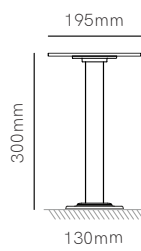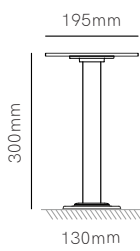

\*Need Clos (page 561).



### Technical Information

Installation	Surface / Floor	Surface / Floor
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 4882 <input checked="" type="checkbox"/> 4883 <input checked="" type="checkbox"/> 4884	<input type="checkbox"/> 4888 <input checked="" type="checkbox"/> 4889 <input checked="" type="checkbox"/> 4890



Clos 8W base 60cm

Clos 16W base 60cm

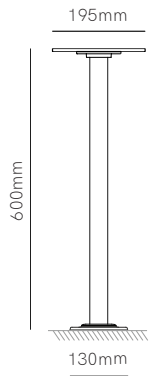

\*Need Clos (page 561).

### Technical Information

Installation	Surface / Floor	Surface / Floor
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 4885 <input checked="" type="checkbox"/> 4886 <input checked="" type="checkbox"/> 4887	<input type="checkbox"/> 4891 <input checked="" type="checkbox"/> 4892 <input checked="" type="checkbox"/> 4893












Mini comet

Comet



Technical Information

Power	Switch 10W / 20W	Switch 20W / 40W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	10W: 1.250 lm / 20W 2.400 lm	20W: 2.500 lm / 40W: 5.000 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 5075 <input checked="" type="checkbox"/> 5076 <input checked="" type="checkbox"/> 5113	<input type="checkbox"/> 5073 <input checked="" type="checkbox"/> 5074 <input checked="" type="checkbox"/> 5112





3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 40°x90° | | 50/60 Hz | | IK10 | +45°C / -25°C | AKZO NOBEL | CCT SWITCH | POWER SWITCH | TRIAC DIMM





Cam 60

Cam 110

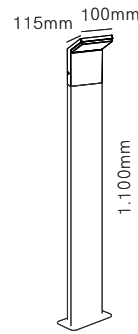

Technical Information

Power	9W	9W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	690 lm / 700 lm	690 lm / 700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 3.000K 4709	<input type="checkbox"/> 3.000K 3751
	<input type="checkbox"/> 4.000K 3586	<input type="checkbox"/> 4.000K 3752
	<input checked="" type="checkbox"/> 3.000K 4710	<input checked="" type="checkbox"/> 3.000K 3753
	<input checked="" type="checkbox"/> 4.000K 3590	<input checked="" type="checkbox"/> 4.000K 3754

1/4

1/2





3 YEARS WARRANTY | 25.000 HOURS | → | IP 54 | 220/240 VAC | PF >0,7 | CRI ≥80 | | 120° | 50 Hz | | +45°C / -25°C



Neo

Neo XL



Technical Information

Power	9W	18W
Installation	Surface	Surface
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	690 lm / 700 lm	1.640 lm / 1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 3.000K	3747	<input type="checkbox"/> 3.000K	3890
	<input type="checkbox"/> 4.000K	3748	<input type="checkbox"/> 4.000K	3891
	<input checked="" type="checkbox"/> 3.000K	3749	<input checked="" type="checkbox"/> 3.000K	3892
	<input checked="" type="checkbox"/> 4.000K	3750	<input checked="" type="checkbox"/> 4.000K	3893

IP 54 | 220/240 VAC | PF >0,7 |



IP 65 | 100/240 VAC | PF >0,9 |



3 YEARS WARRANTY | 25.000 HOURS | → | CRI ≥80 | | 120° | 50 Hz | | +45°C / -25°C

Neo sensor

Neo XL sensor




Technical Information

Power	9W	18W
Installation	Surface	Surface
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	690 lm / 700 lm	1.640 lm / 1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black


Code	<input type="checkbox"/> 3.000K 3585	<input type="checkbox"/> 3.000K 3886
	<input type="checkbox"/> 4.000K 3583	<input type="checkbox"/> 4.000K 3887
	<input checked="" type="checkbox"/> 3.000K 3584	<input checked="" type="checkbox"/> 3.000K 3888
	<input checked="" type="checkbox"/> 4.000K 3582	<input checked="" type="checkbox"/> 4.000K 3889


220/240 VAC | PF >0,7 |

100/240 VAC | PF >0,9 |



| 
 | 
 → | 
 IP 54 | 
 CRI ≥80 | 
 | 
 120° | 
 50 Hz | 
 | 
 +45°C | 
 -25°C | 
 | 
 ON OFF |


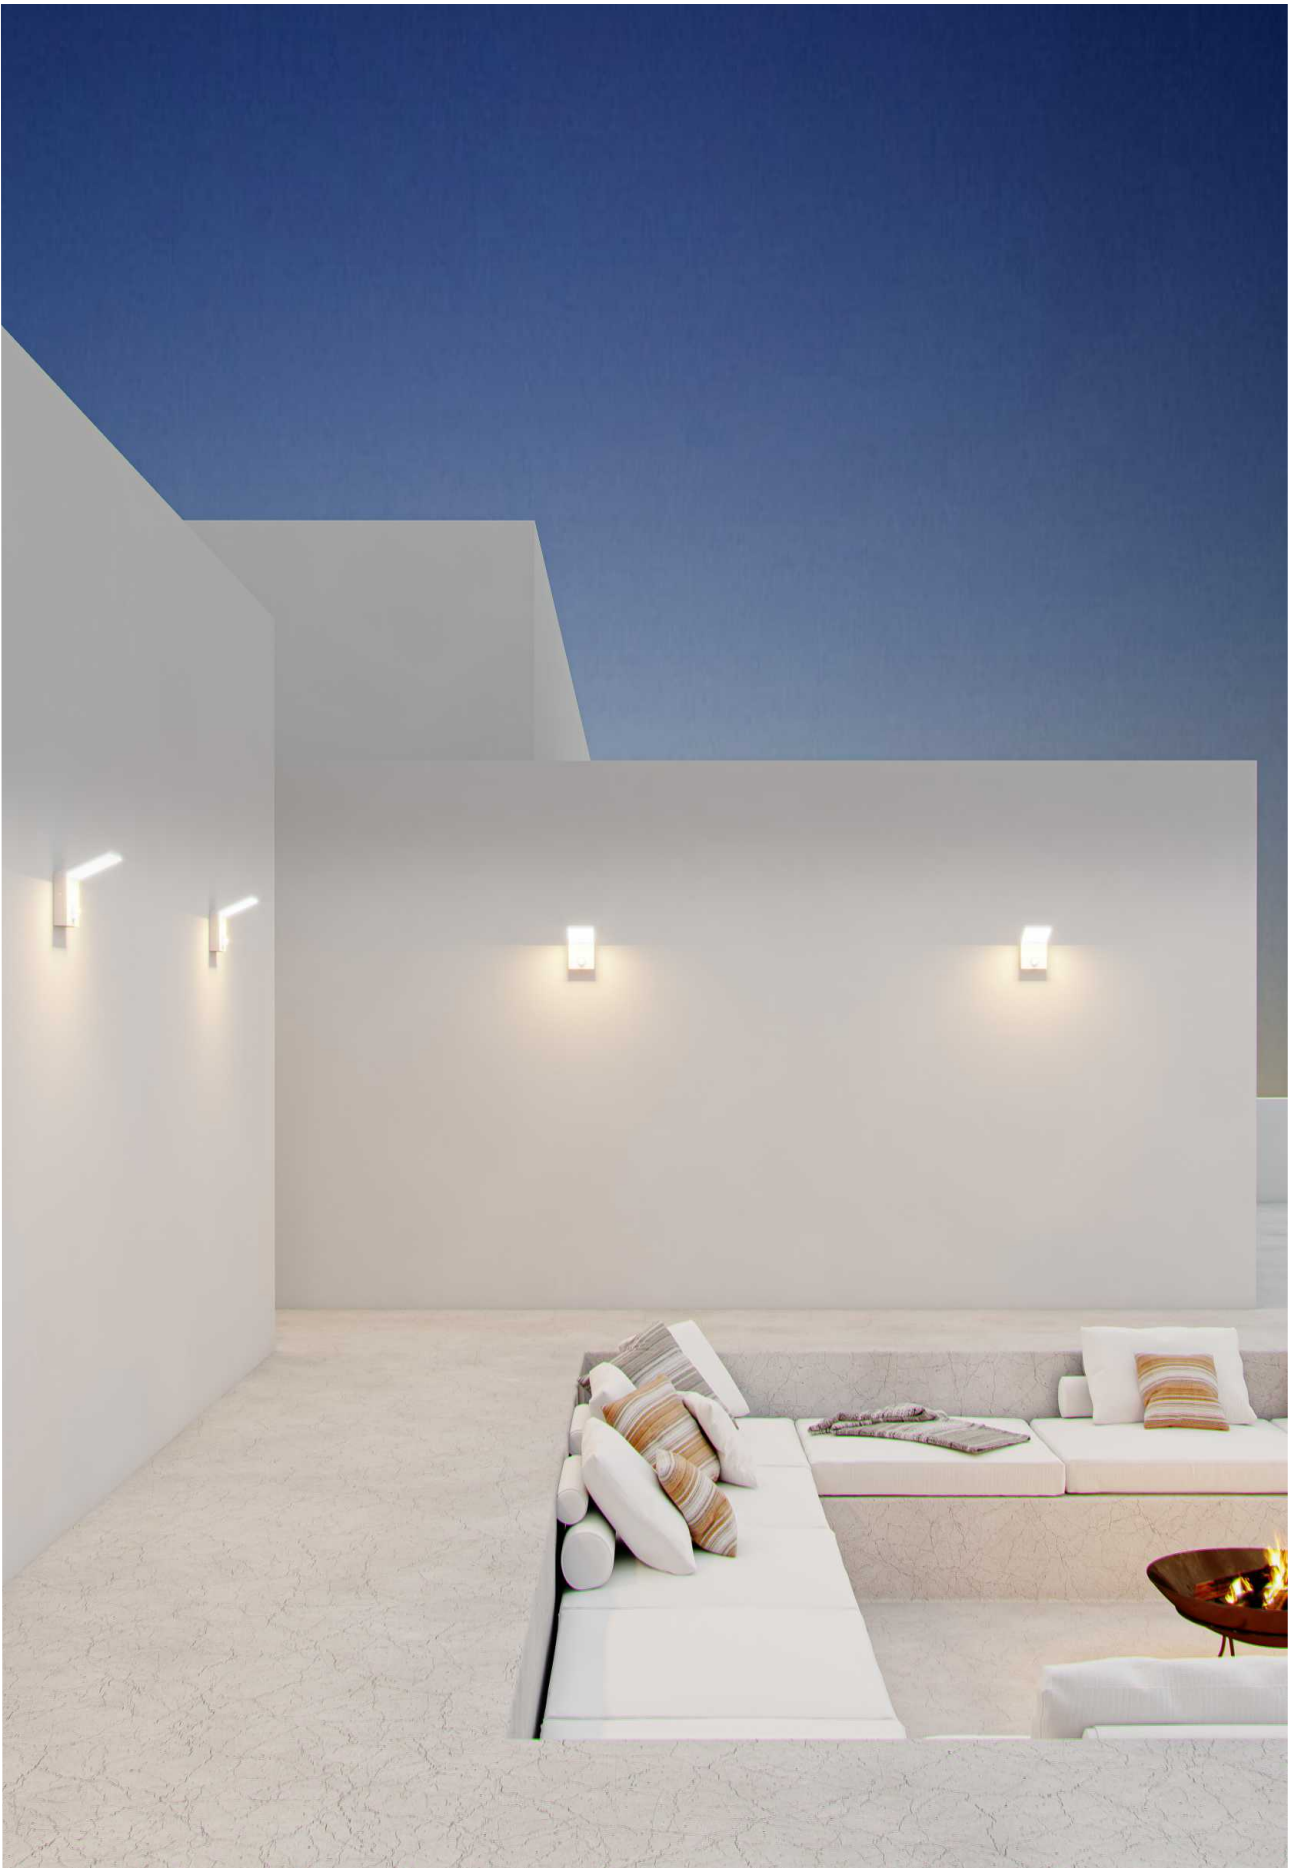


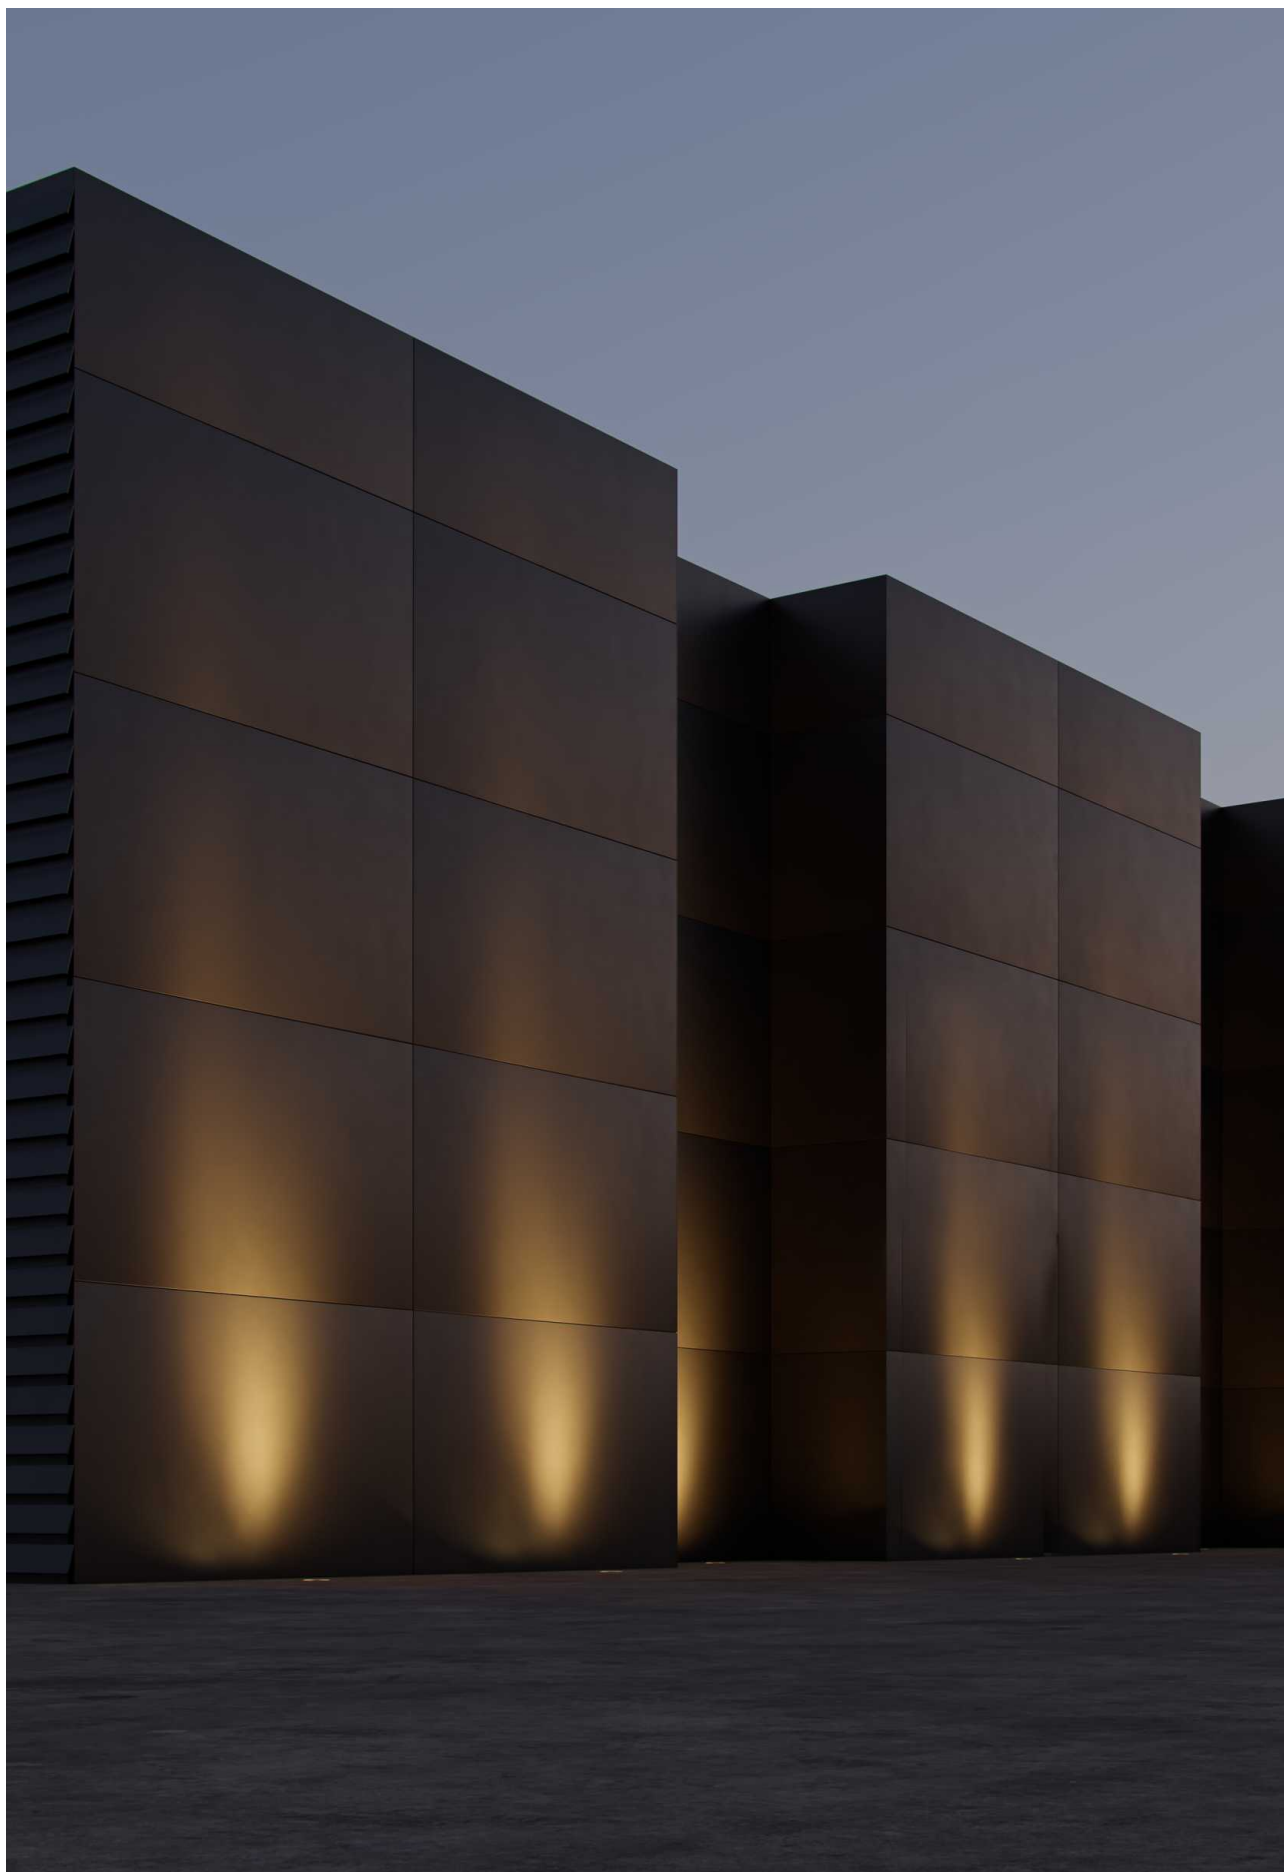



Sigma 3W

Sigma 17W

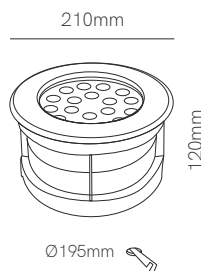


Technical Information

Power	3W	17W
Installation	Recessed	Recessed
Color Temperature	3.000K	3.000K
Lumens	210 lm	1.440 lm
Material	Aluminium	Aluminium
Finishes	Brushed	Brushed

Code	■ 3.000K 4251	■ 3.000K 4135
------	---------------	---------------

PF >0,6 |

PF >0,9 |




\*Integrated driver. Drainage (min. 300mm).

| 
 | 
 | 
 | 
 | 
 | 
 | 
 | 
 | 
 | 
 |





Signal

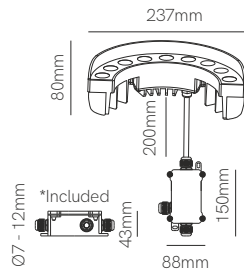


Technical Information

Power	9W
Installation	Floor / Tree trunk
Color Temperature	3.000K
Lumens	720 lm
Material	Aluminium
Finishes	Dark gray
Code	■ 3.000K 4290




\*Integrated driver. IP65 connection box included.

3 YEARS WARRANTY | 20.000 HOURS | → | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥80 | CABLE 20CM | 30° | 50/60 Hz | IK05 | +40°C / -20°C | 1/25

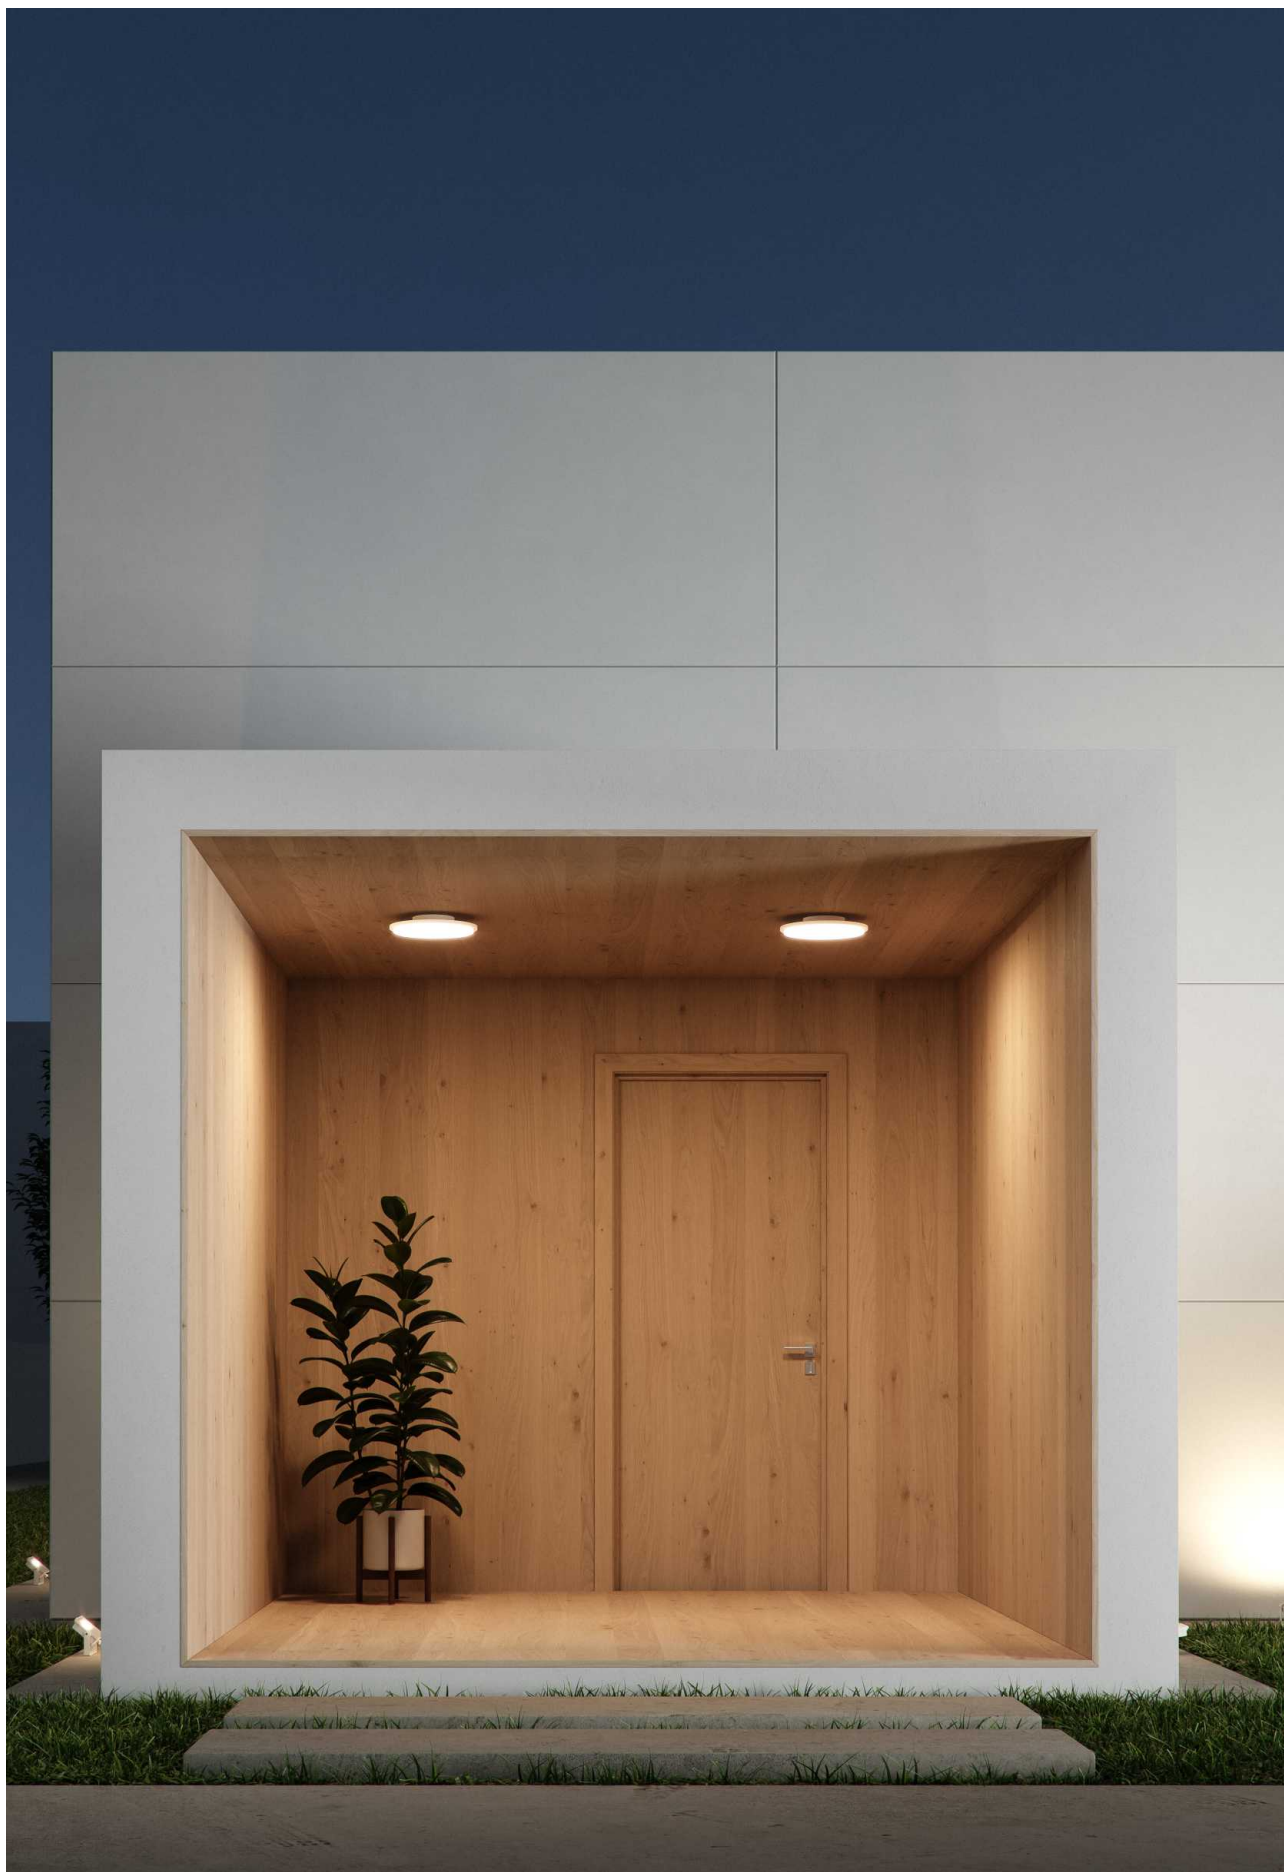

Gadir



Technical Information

Power	18W
Installation	Surface
Color Temperature	3.000K / 4.000K
Lumens	1.400 lm / 1.500 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 3.000K 3758
	<input type="checkbox"/> 4.000K 3589
	<input checked="" type="checkbox"/> 3.000K 3757
	<input checked="" type="checkbox"/> 4.000K 3593
	Custom RAL





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | → | IP 65 | 100/240 VAC | PF >0,9 | CRI ≥80 | | 120° | 50 Hz | | +45°C / -25°C | 1/4



Sunset round

Sunset square



Technical Information

Power	16W	16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.800 lm	1.800 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 4989 <input checked="" type="checkbox"/> 4990 <input type="checkbox"/> 4991 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4992 <input checked="" type="checkbox"/> 4993 <input type="checkbox"/> 4994 <input checked="" type="checkbox"/> Custom RAL



ⓘ Consult delivery terms and conditions.







New

Sunset XL

Sunset XL dual

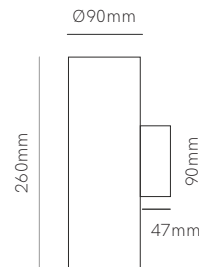


Technical Information

Power	16W	2X16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.300K / 4.000K	Switch 2.700K / 3.300K / 4.000K
Lumens	1.450 lm	2.900 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code	<input type="checkbox"/> 5419	<input type="checkbox"/> 5422
	<input checked="" type="checkbox"/> 5420	<input checked="" type="checkbox"/> 5423
	<input type="checkbox"/> 5421	<input type="checkbox"/> 5424

1/20

1/15




3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 100/277 VAC | PF >0,9 | | | 24° | 50/60 Hz | | +50°C / -25°C |








Lek round



Lek square

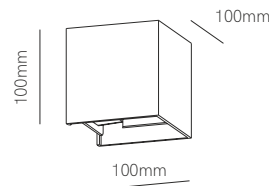

Technical Information

Power	6,8W	6,8W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm / 530 lm / 542 lm	480 lm / 530 lm / 542 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code	<input type="checkbox"/> 2.700K 4906	<input type="checkbox"/> 2.700K 4303
	<input type="checkbox"/> 3.000K 4907	<input type="checkbox"/> 3.000K 3983
	<input type="checkbox"/> 4.000K 4908	<input type="checkbox"/> 4.000K 3984
	<input checked="" type="checkbox"/> 2.700K 4909	<input checked="" type="checkbox"/> 2.700K 4304
	<input checked="" type="checkbox"/> 3.000K 4910	<input checked="" type="checkbox"/> 3.000K 3985
	<input checked="" type="checkbox"/> 4.000K 4911	<input checked="" type="checkbox"/> 4.000K 3986
	<input type="checkbox"/> 2.700K 4912	<input type="checkbox"/> 2.700K 4312
	<input type="checkbox"/> 3.000K 4913	<input type="checkbox"/> 3.000K 3987
	<input type="checkbox"/> 4.000K 4914	<input type="checkbox"/> 4.000K 3988
	Custom RAL	Custom RAL




ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 54 | 220/240 VAC | PF >0,9 | CRI ≥80 | 0°-120° | 50/60 Hz | IK04 | +40°C / -10°C | AKZO NOBEL | 1/12





Blis round



Blis square



Blis rectangular

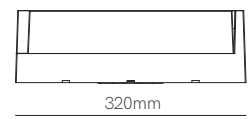

Technical Information

Power	15W	15W	24W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.470 lm	1.370 lm	2.360 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 4957 <input checked="" type="checkbox"/> 4958 <input checked="" type="checkbox"/> 4959	<input type="checkbox"/> 4960 <input checked="" type="checkbox"/> 4961 <input checked="" type="checkbox"/> 4962	<input type="checkbox"/> 4982 <input checked="" type="checkbox"/> 4983 <input checked="" type="checkbox"/> 4984

PF >0,6 | 250°


PF >0,6 | 180°

PF >0,9 | 180°




\*IP65 connection box included.



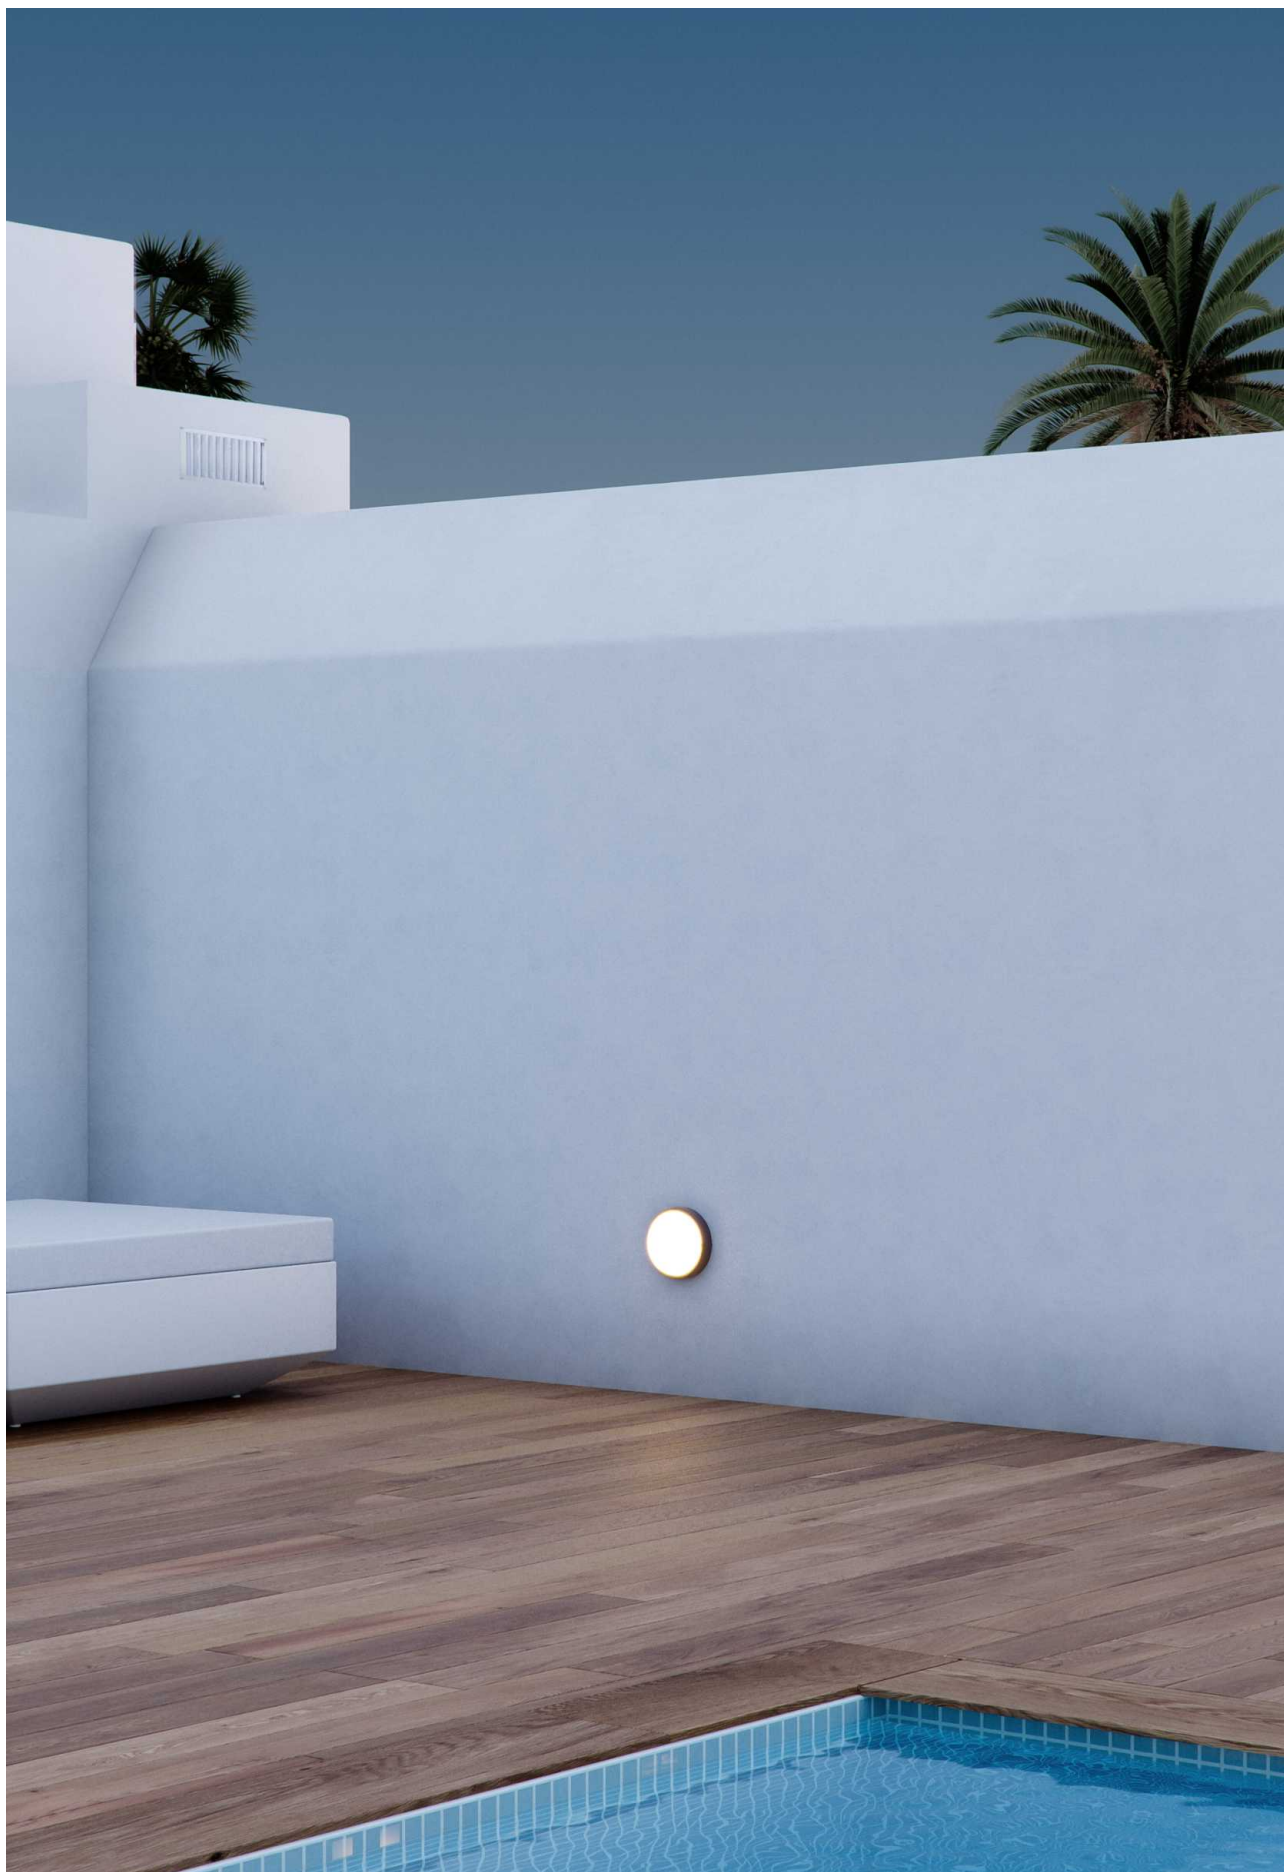

Selen



Technical Information

Power	12W
Installation	Surface
Color Temperature	3.000K / 4.000K
Lumens	1.200 lm / 1.250 lm
Material	Polycarbonate
Finishes	White / Black

Code	<input type="checkbox"/>	3.000K	4668
	<input type="checkbox"/>	4.000K	4667
	<input checked="" type="checkbox"/>	3.000K	4828
	<input checked="" type="checkbox"/>	4.000K	4827
		Custom RAL	




Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 120° | 50/60 Hz | IK02 | +40°C / -20°C | 1/10





Zibor



Technical Information


Power	12W
Installation	Surface
Color Temperature	3.000K / 4.000K
Lumens	1.200 lm / 1.250 lm
Material	Polycarbonate
Finishes	White / Black

Code	<input type="checkbox"/> 3.000K 4670
	<input type="checkbox"/> 4.000K 4669
	<input checked="" type="checkbox"/> 3.000K 4830
	<input checked="" type="checkbox"/> 4.000K 4829
	Custom RAL





Consult delivery terms and conditions.

3 YEARS WARRANTY | 
 25.000 HOURS | 
 IP 65 | 
 220/240 VAC | 
 PF >0,9 | 
 CRI ≥80 | 
 120° | 
 50/60 Hz | 
 IK02 | 
 +40°C / -20°C | 
 1/10

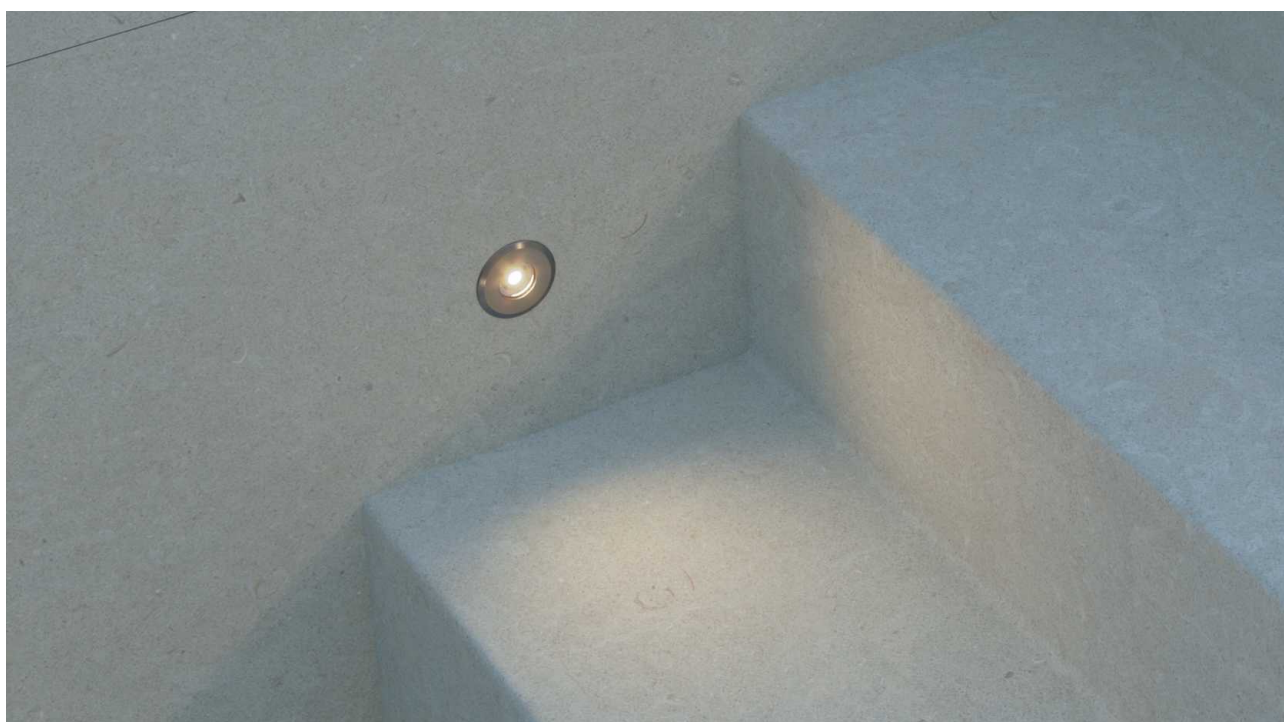

Optic

Nix



Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.000K	3.000K
Lumens	55 lm	55 lm
Material	Inox 304	Inox 304
Finishes	Brushed Inox	Brushed Inox
Code	■ 4331	■ 4369






\*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 50/60 Hz | IK09 | +50°C / -20°C | 1/50


Ina

Dis



Technical Information


Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.000K	3.000K
Lumens	55 lm	55 lm
Material	Inox 304	Inox 304
Finishes	Brushed Inox	Brushed Inox
Code	■ 4367	■ 4368



\*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | → | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | | CABLE 50CM | 50/60 Hz | | +50°C -20°C |




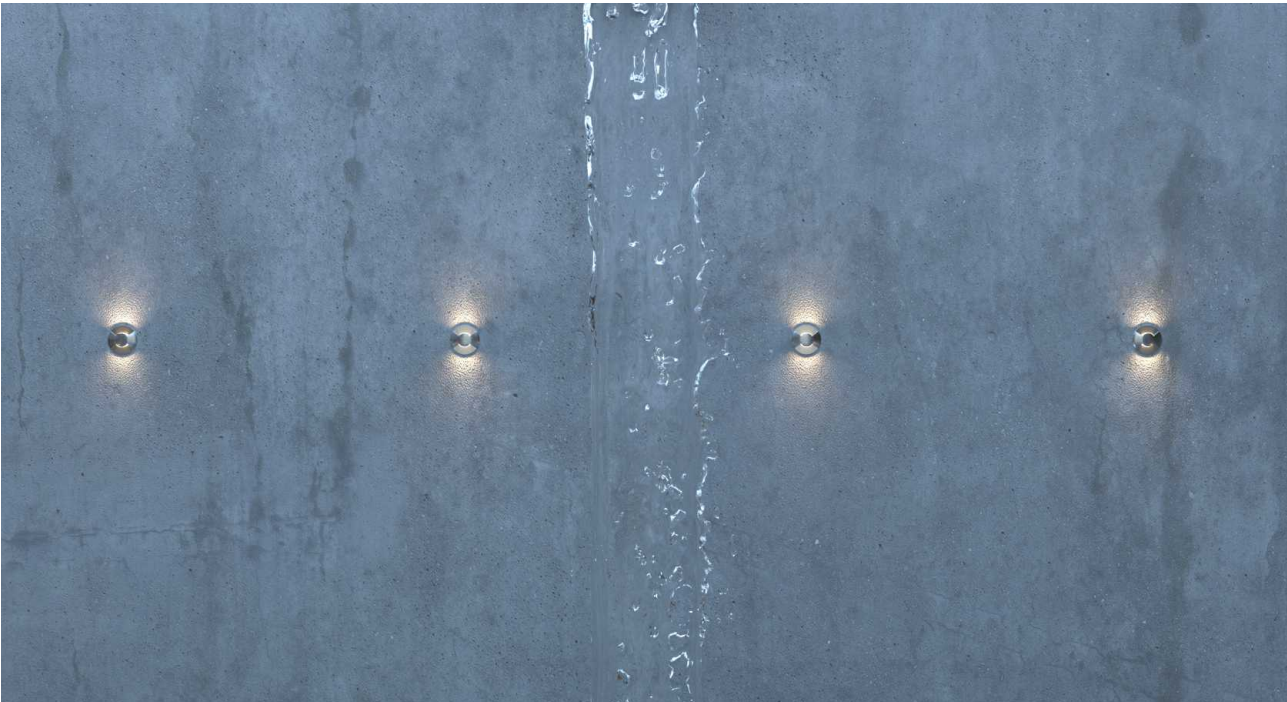






Showroom Beneito Faure, La Roca del Valles (Spain).

Polo



Technical Information


Power	2W
Installation	Recessed
Color Temperature	3.200K / 4.000K
Lumens	90 lm / 96 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	3.200K	3995
	<input type="checkbox"/>	4.000K	3996
	<input checked="" type="checkbox"/>	3.200K	3997
	<input checked="" type="checkbox"/>	4.000K	3998
		Custom RAL	




Consult delivery terms and conditions.

3 YEARS WARRANTY | 
 50.000 HOURS | 
 IP 54 | 
 220/240 VAC | 
 PF >0,5 | 
 CRI ≥80 | 
 | 
 65° | 
 50/60 Hz | 
 +50°C | 
 -20°C | 
 AKZO NOBEL | 
 1/200

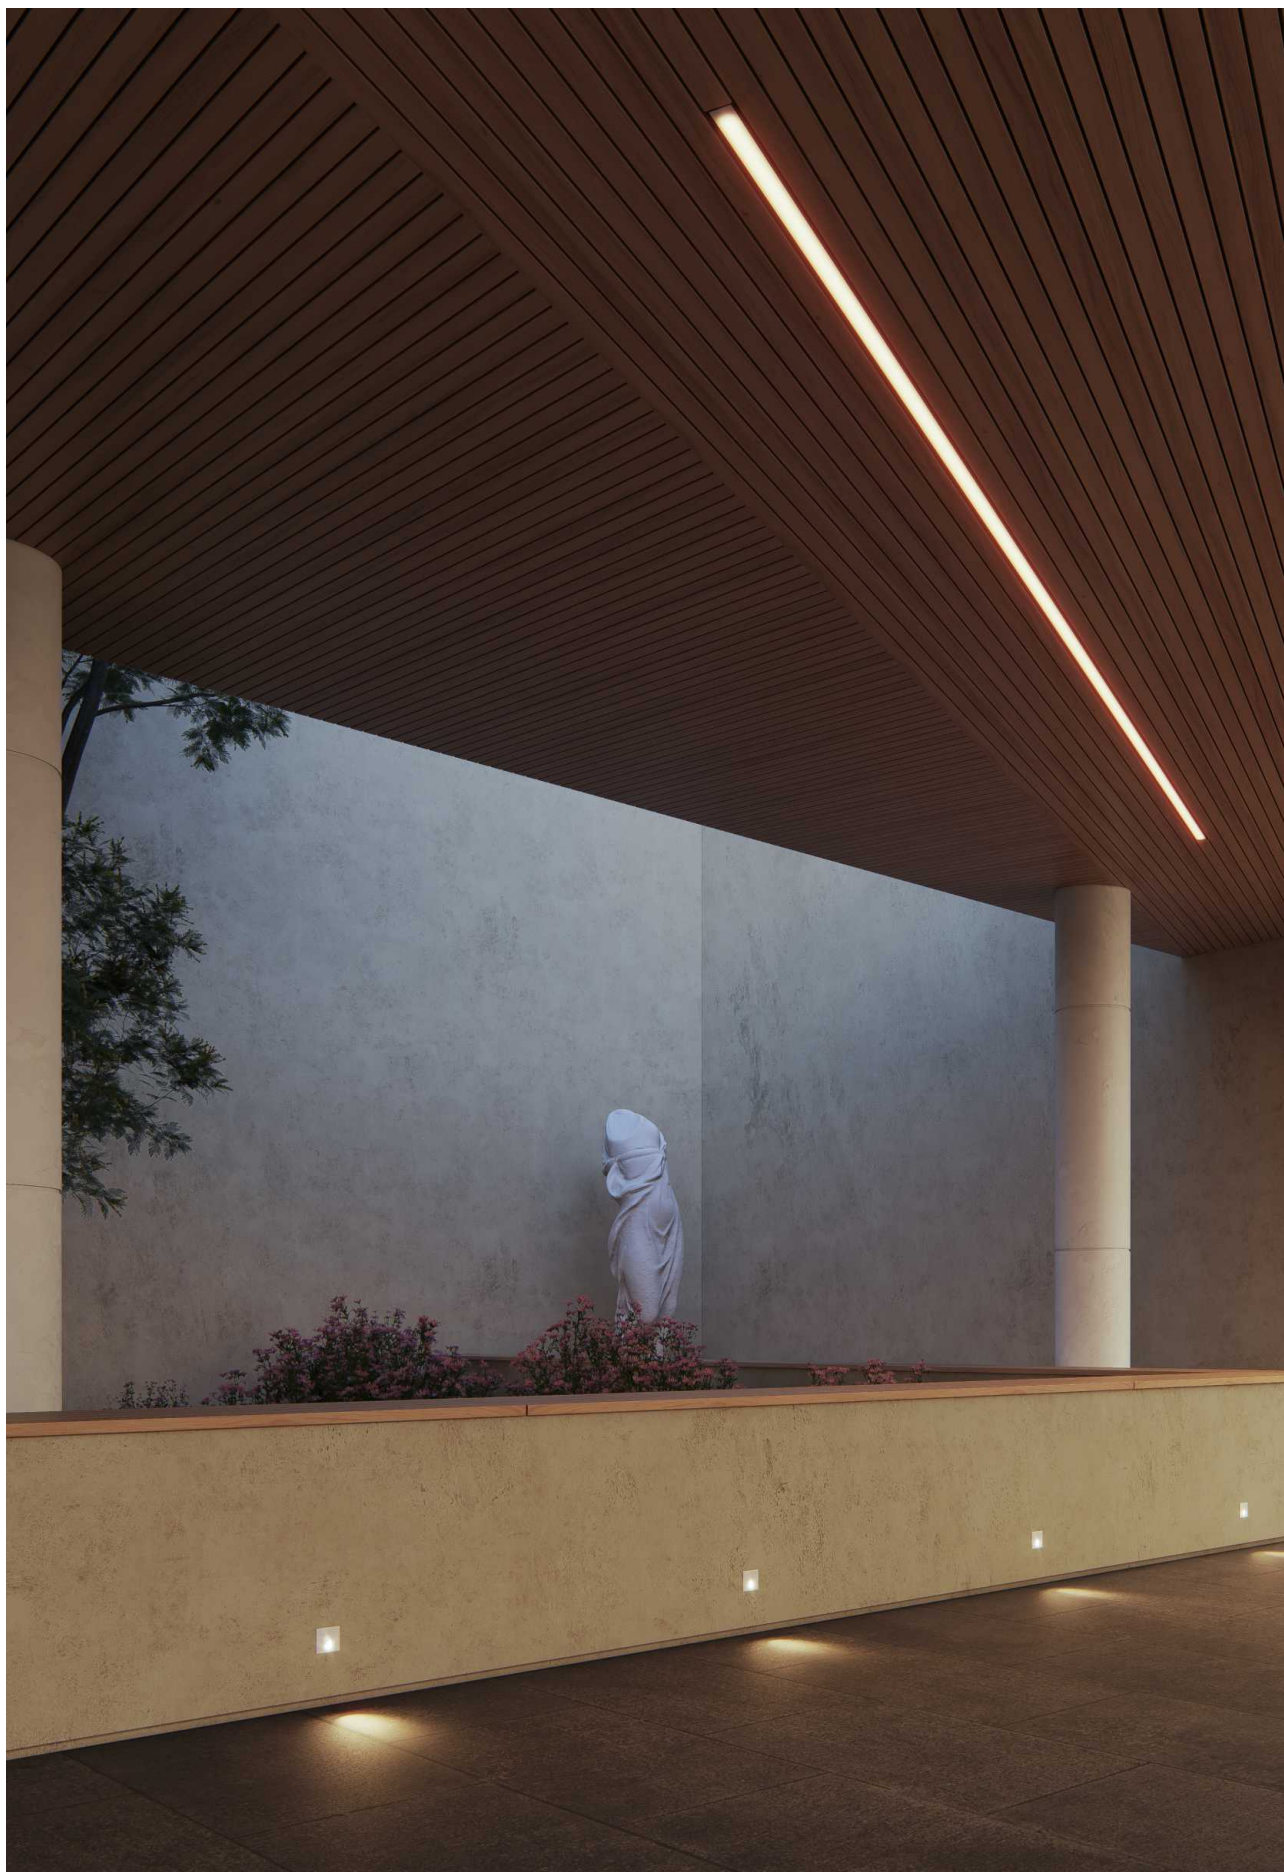


Luky

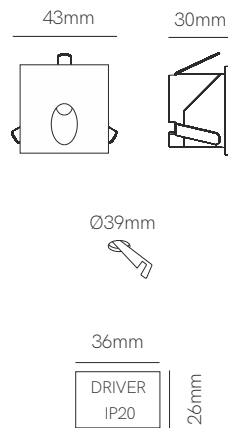

Technical Information

Power	2W
Installation	Recessed
Color Temperature	3.200K / 4.000K
Lumens	90 lm / 96 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	3.200K	3999
	<input type="checkbox"/>	4.000K	4000
	<input checked="" type="checkbox"/>	3.200K	4001
	<input checked="" type="checkbox"/>	4.000K	4002
		Custom RAL	




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 50.000 HOURS | IP 54 | 220/240 VAC | PF >0,5 | CRI ≥80 | | 65° | 50/60 Hz | +50°C / -20°C | AKZO NOBEL | 1/200







Mis round switch




Technical Information

Power	3W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	200 lm
Material	Polycarbonate
Finishes	White / Black / Corten

Code	<input type="checkbox"/> 5020
	<input checked="" type="checkbox"/> 5021
	<input type="checkbox"/> 5022
	 Custom RAL




\*Integrated driver.

 Consult delivery terms and conditions.

3 YEARS WARRANTY | 
 25.000 HOURS | 
 IP 65 | 
 220/240 VAC | 
 PF >0,5 | 
 CRI ≥80 | 
  | 
  | 
 50/60 Hz | 
  | 
 IK06 | 
  | 
 +40°C | 
 -20°C | 
  | 
 CCT SWITCH | 
 1/10/50

---


## Mis square switch

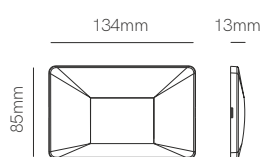



---

### Technical Information

Power	3W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	140 lm
Material	Polycarbonate
Finishes	White / Black / Corten

Code	<input type="checkbox"/> 5023
	<input type="checkbox"/> 5024
	<input type="checkbox"/> 5025
	 Custom RAL



\*Integrated driver.

ⓘ Consult delivery terms and conditions.















New

Artis square

Artis round



Recessed box included  
107mm x 73mm x 53mm



Recessed box included  
67mm x Ø74mm



Surface box included  
103mm x 79mm x 57 mm




Surface box included  
54mm x Ø80mm




Technical Information

Power	4,5W	4,5W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	130 lm	130 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White	White
Code	<input type="checkbox"/> 5028	<input type="checkbox"/> 5205



\*Recessed and surface box included.









New

Tween surface

Tween recessed

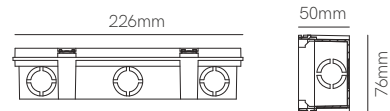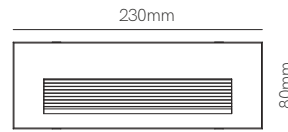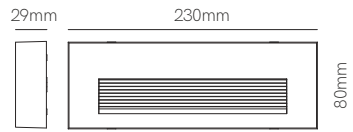


Recessed box included




Technical Information

Power	5W	5W
Installation	Surface	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	360 lm	360 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 5196 <input checked="" type="checkbox"/> 5197 <input type="checkbox"/> 5198	<input type="checkbox"/> 5199 <input checked="" type="checkbox"/> 5200 <input type="checkbox"/> 5201



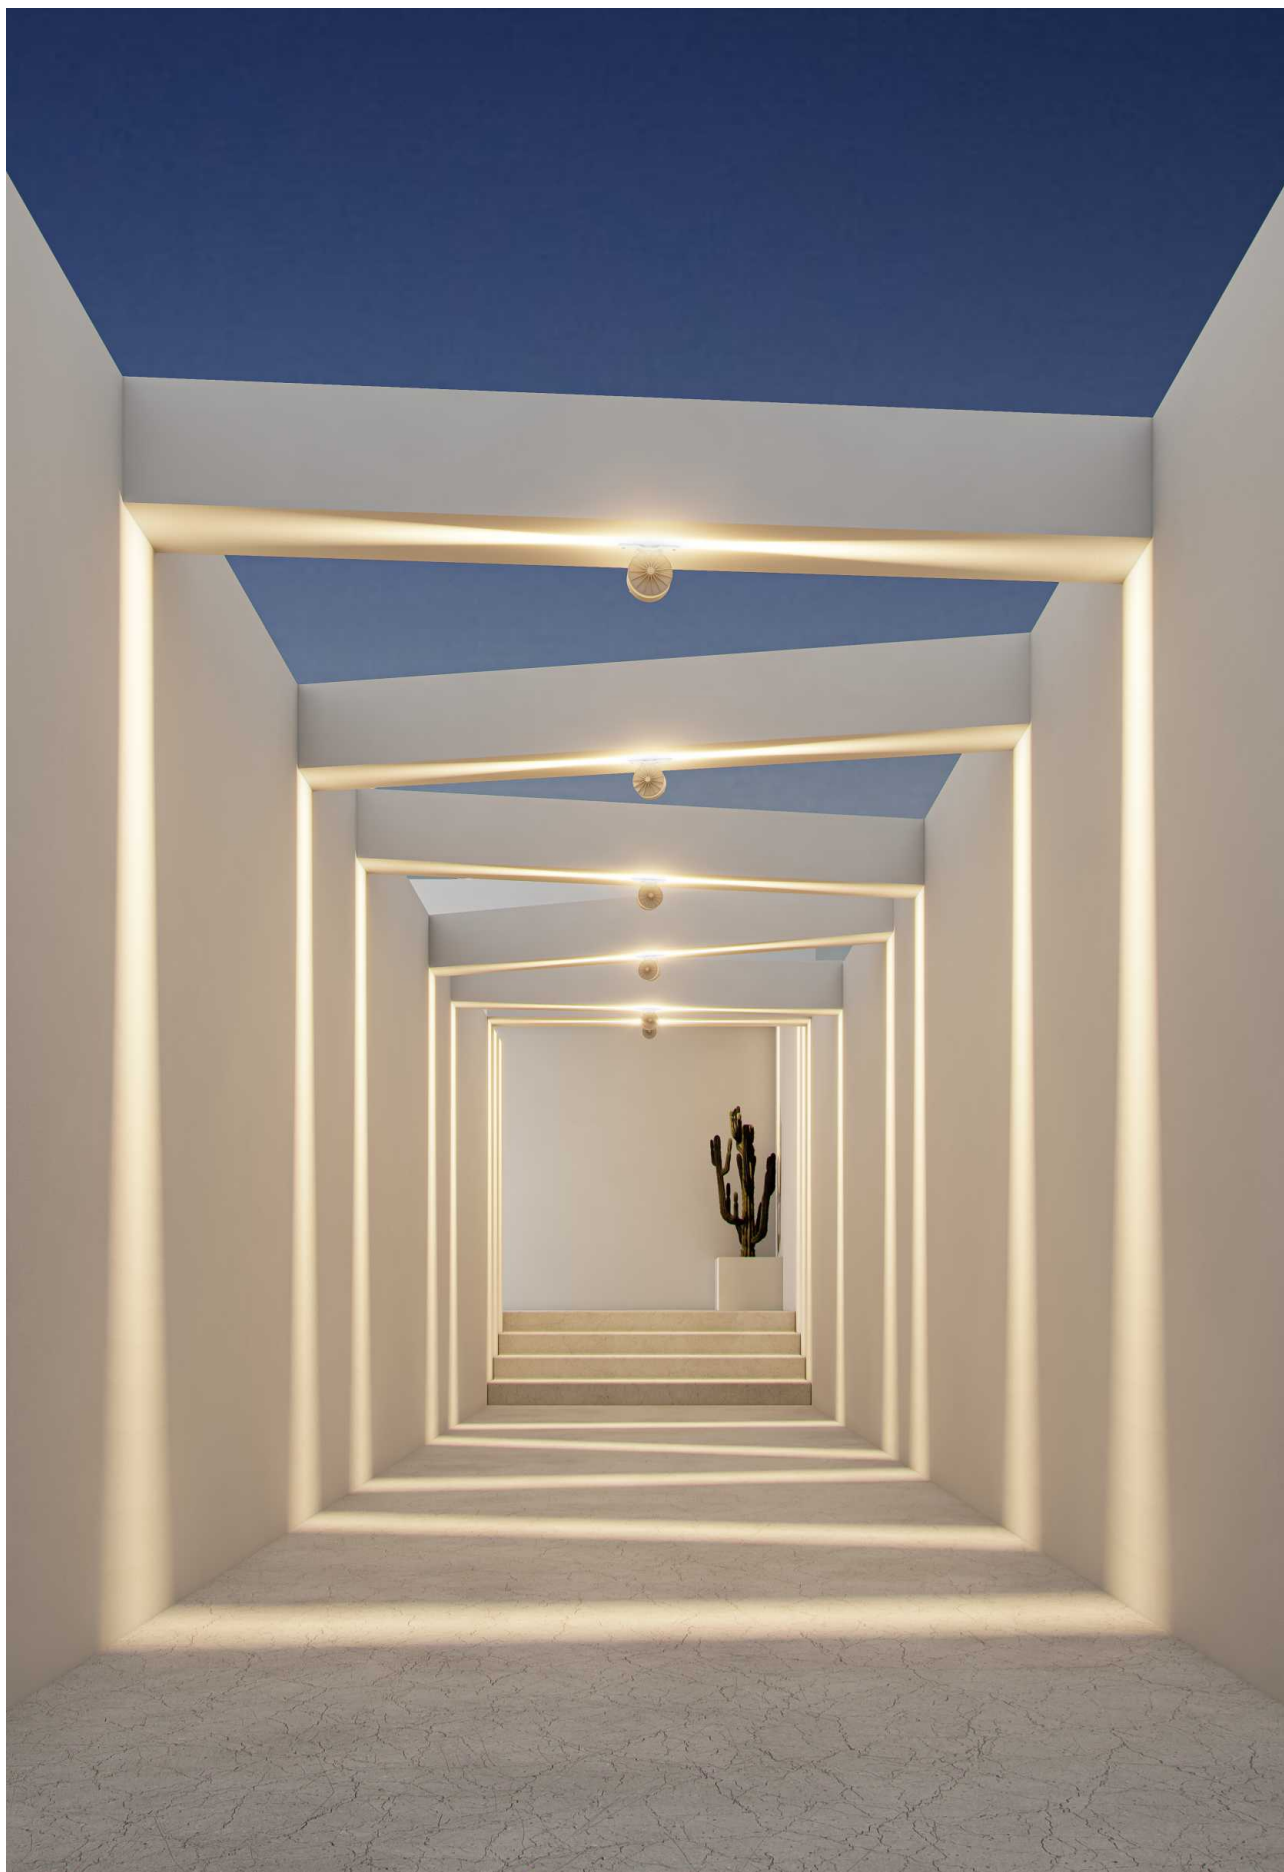

Nik



Technical Information


Power	5W						
Installation	Surface						
Color Temperature	3.000K / 4.000K						
Lumens	340 lm / 350 lm						
Material	Aluminium						
Finishes	Gray						
Code	<table border="0"> <tr> <td>■</td> <td>3.000K</td> <td>4291</td> </tr> <tr> <td>■</td> <td>4.000K</td> <td>4292</td> </tr> </table>	■	3.000K	4291	■	4.000K	4292
■	3.000K	4291					
■	4.000K	4292					




\*Integrated driver.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥70 | 5° | 50/60 Hz | IK05 | +40°C / -20°C | 1/40



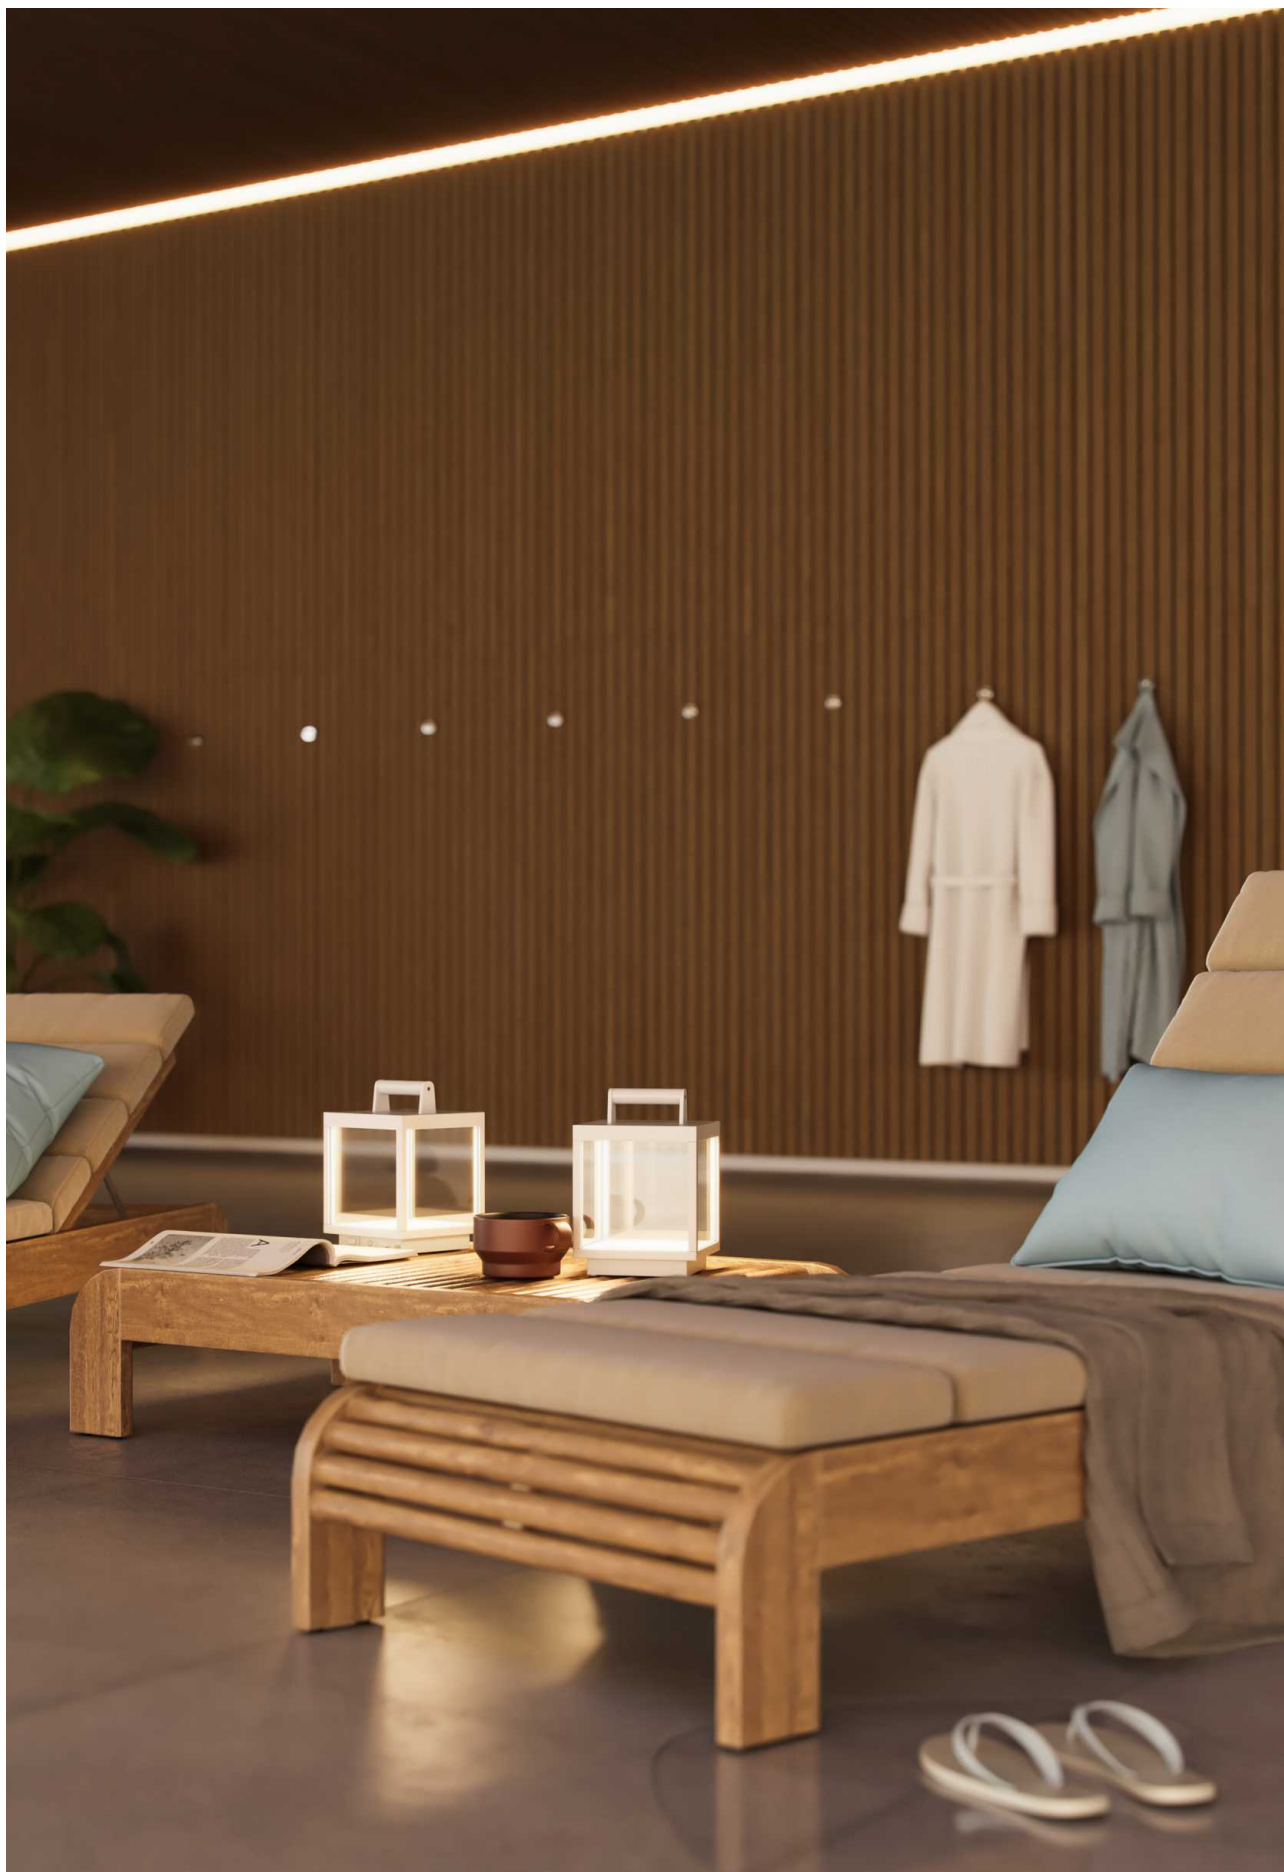

Visor

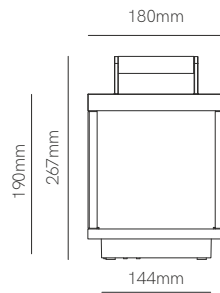

Technical Information

Power	5W
Installation	Portable
Color Temperature	3.000K
Lumens	460 lm / 230 lm / 46 lm
Material	Aluminium
Finishes	White / Corten
Code	<input type="checkbox"/> 3929 <input checked="" type="checkbox"/> 3931




\*Charger by USB. Charger included.

3 YEARS WARRANTY BATTERY 2 YEARS | 30.000 HOURS | → | POWER BANK | 6,5 HOURS | 5/11/25 HOURS | 3,7V USB | 7.800 mAh | IP 65 | CRI ≥80 | 120° | IK05 | 3 INTENSITIES | +45°C / -20°C | 1/4



Fix

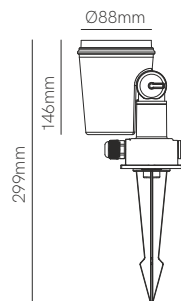

### Technical Information

Installation	Surface / Floor
Material	Polypropylene
Finishes	Black
Lamp Holder	E27
Code	■ 4820



\*Spike included. Recommended lamp Par 38 (page 704).

3 YEARS WARRANTY | IP 65 | 50/60 Hz | 1/6









Sair 10W

Sair 20W

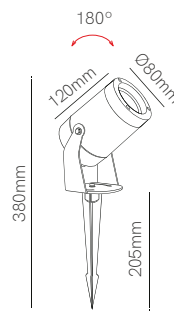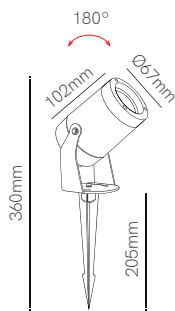

Technical Information

Power	10W	20W
Installation	Floor	Floor
Color Temperature	3.000K	3.000K
Lumens	900 lm	1.500 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 4894 <input checked="" type="checkbox"/> 4895 <input checked="" type="checkbox"/> 4896 <i>New</i>	<input type="checkbox"/> 4897 <input checked="" type="checkbox"/> 4898 <input checked="" type="checkbox"/> 4899 <i>New</i>




\*Spike included.

3 YEARS WARRANTY | 20.000 HOURS | → | IP 65 | 100/265 VAC | PF >0,9 | | | CABLE 24CM | 18° | 50/60 Hz | | +40°C / -20°C |



Caddie

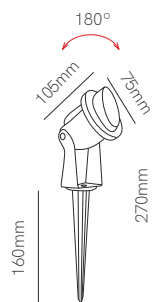

Technical Information

Power	3W
Installation	Floor
Color Temperature	3.000K
Lumens	270 lm
Material	Aluminium
Finishes	Black / Corten
Code	<div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; background-color: black; margin-right: 5px;"></div> 3581         </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 15px; height: 15px; background-color: #8B4513; margin-right: 5px;"></div> 4923         </div>



\*Spike included.


3 YEARS WARRANTY | 
 35.000 HOURS | 
 IP 65 | 
 100/277 VAC | 
 PF >0,6 | 
 CRI ≥72 | 
 CABLE 24CM | 
 45° | 
 50/60 Hz | 
 IK05 | 
 +40°C / -20°C | 
 1/50







Fade

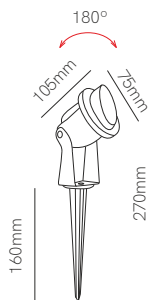


Technical Information

Power	5W
Installation	Floor
Color Temperature	3.000K
Lumens	450 lm
Material	Aluminium
Finishes	Black / Corten
Code	<div style="display: flex; align-items: center; gap: 10px;"> <span style="width: 15px; height: 15px; background-color: black; border: 1px solid black;"></span> 3580                   <span style="width: 15px; height: 15px; background-color: #8B4513; border: 1px solid black;"></span> 4924             </div>





\*Spike included.

3 YEARS WARRANTY | 
 35.000 HOURS | 
 IP 65 | 
 100/277 VAC | 
 PF >0,6 | 
 CRI ≥80 | 
 CABLE 24CM | 
 45° | 
 50/60 Hz | 
 IK05 | 
 +40°C / -20°C | 
 1/50

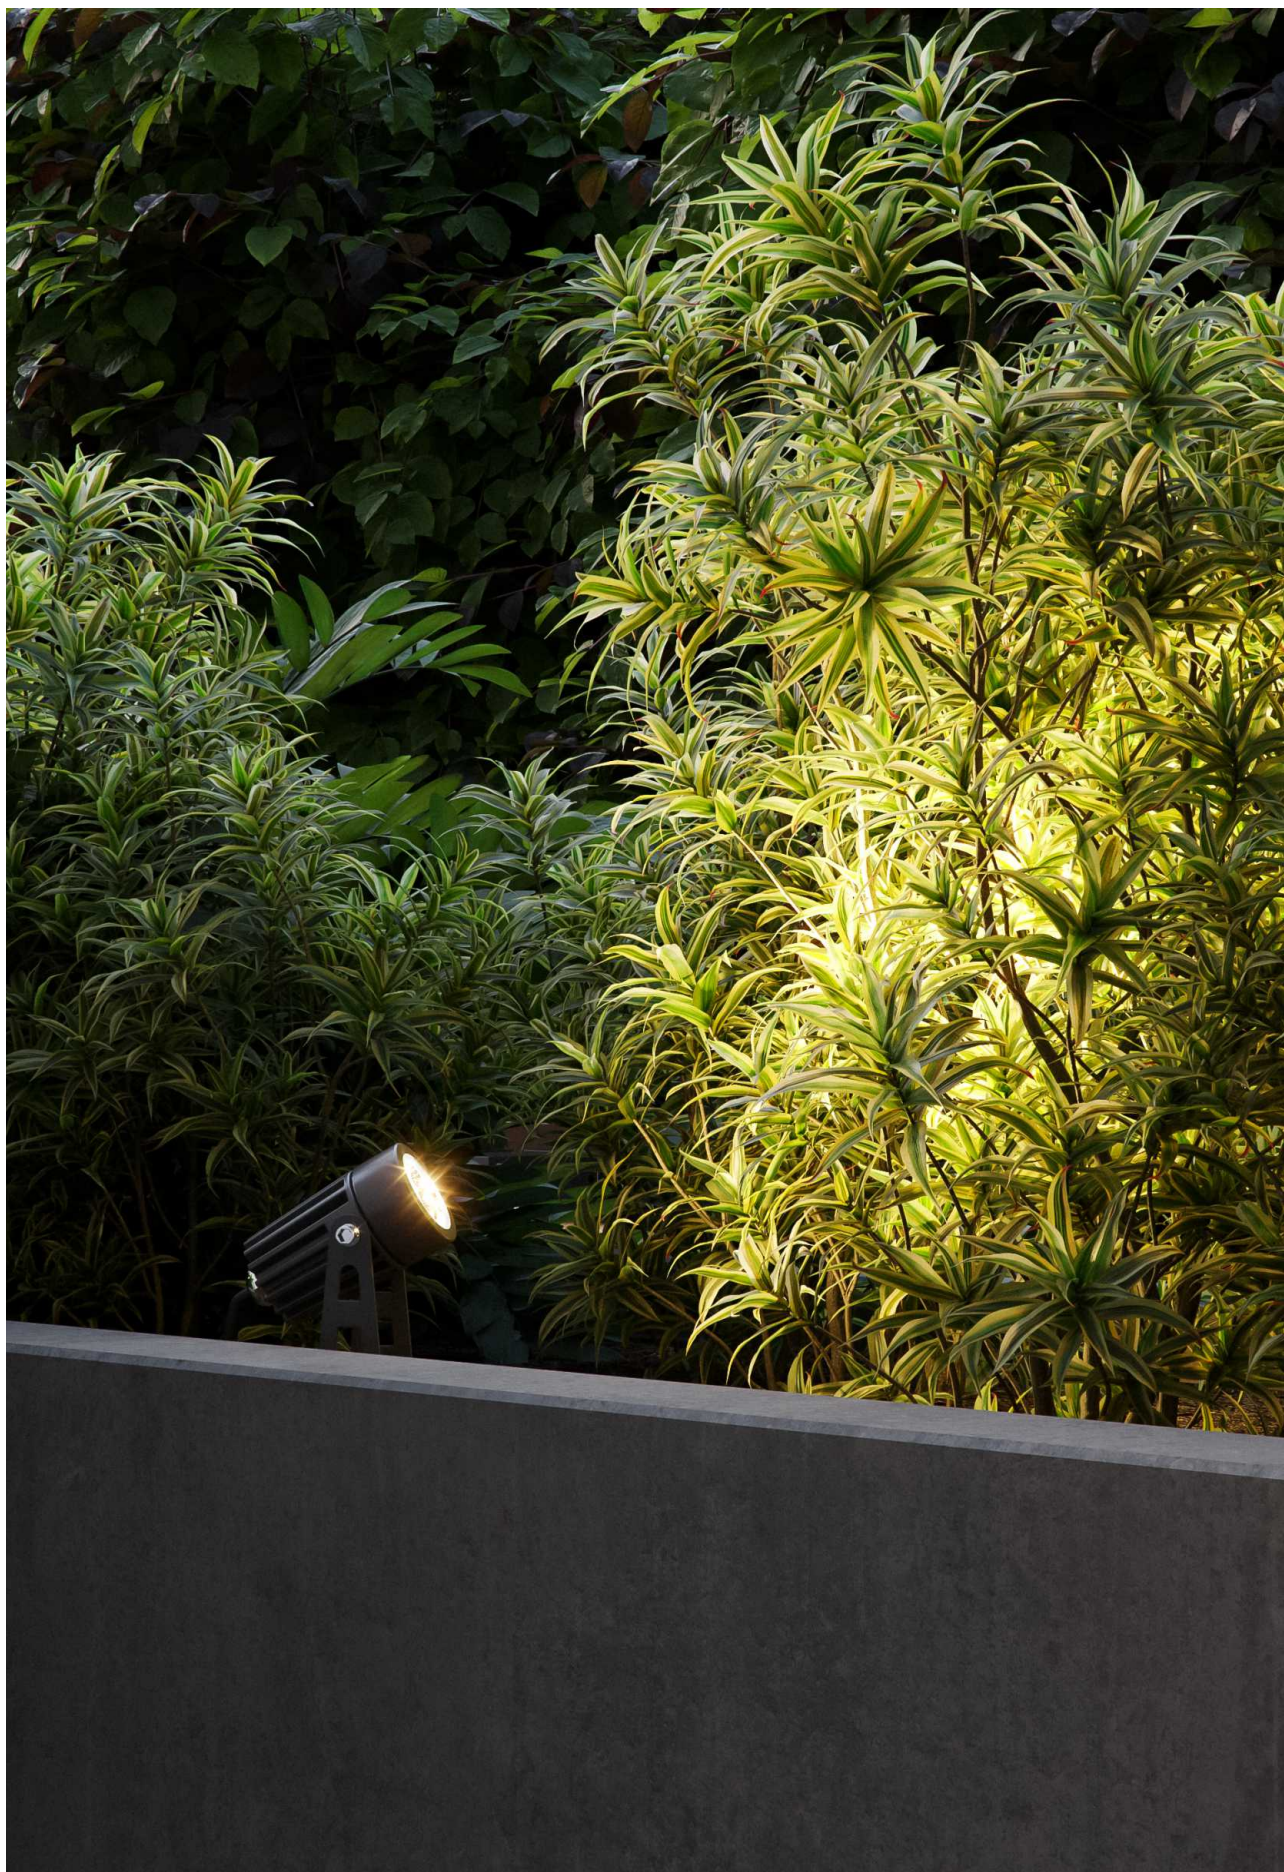

Zas round

Zas square

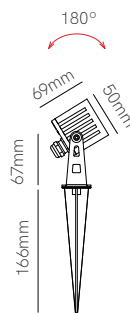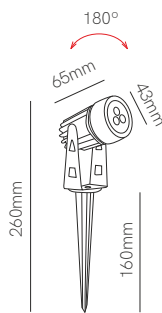

Technical Information

Power	3W	7W
Installation	Floor	Floor
Color Temperature	3.000K	3.000K
Lumens	240 lm	450 lm
Material	Aluminium	Aluminium
Finishes	Black / Corten	White / Black / Corten

Code	■ 4134	□ 4690
	■ 4922	■ 4692
		■ 4693

100/277 VAC | 20.000 HOURS | PF >0,6 | 30° | IK05 | 220/240 VAC | 30.000 HOURS | PF >0,9 | 40° | IK08



\*Spike included.


3 YEARS WARRANTY | IP 65 | → | CRI ≥80 | | CABLE 24CM | 50/60 Hz | +40°C -20°C | 1/50







Sky with spike

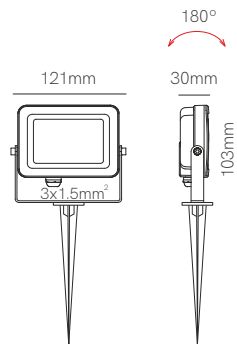

Technical Information

Power	10W						
Installation	Floor						
Color Temperature	3.000K / GREEN						
Lumens	1.000 lm / 820 lm						
Material	Aluminium						
Finishes	Corten						
Code	<table border="1"> <tr> <td>■</td> <td>3.000K</td> <td>4340</td> </tr> <tr> <td>■</td> <td>GREEN</td> <td>4341</td> </tr> </table>	■	3.000K	4340	■	GREEN	4341
■	3.000K	4340					
■	GREEN	4341					





\*Spike included.

5 YEARS WARRANTY | 50.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C / -20°C | AKZO NOBEL | >1KV | 1/32



Sky switch 10W

Sky switch 20W

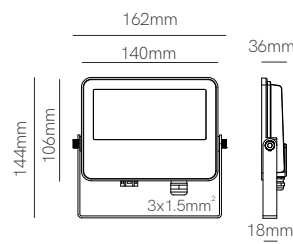
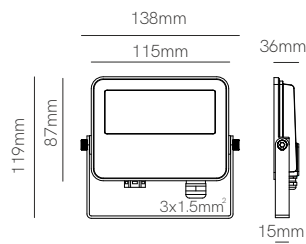


Technical Information

Power	10W	20W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.200 lm	2.400 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black / Gray
Code	<input type="checkbox"/> 4679 <input checked="" type="checkbox"/> 4680 <input type="checkbox"/> 4681	<input type="checkbox"/> 4682 <input checked="" type="checkbox"/> 4683 <input type="checkbox"/> 4684





Accessories



3 YEARS WARRANTY | 25.000 HOURS | → | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | IK08 | +45°C / -20°C | AKZO NOBEL | CCT SWITCH | >1KV

Sky switch 30W

Sky switch 40W

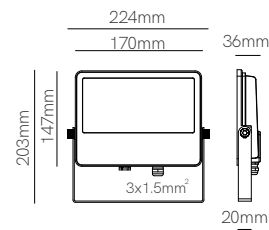
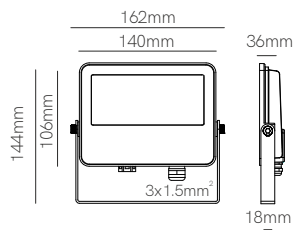


Technical Information

Power	30W	40W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	3.600 lm	4.800 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black / Gray
Code	<input type="checkbox"/> 4685 <input checked="" type="checkbox"/> 4686 <input checked="" type="checkbox"/> 4687	<input type="checkbox"/> 4688 <input checked="" type="checkbox"/> 4689 <input checked="" type="checkbox"/> 4694






Accessories



3 YEARS WARRANTY | 25.000 HOURS | → | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | CCT SWITCH | >1KV



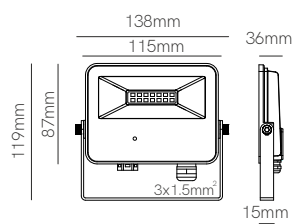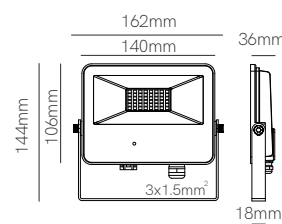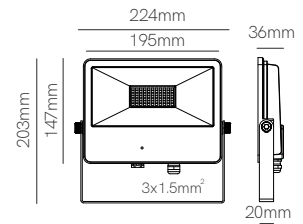

Sky microwave sensor  
10WSky microwave sensor  
30WSky microwave sensor  
50W

## Technical Information

Power	10W	30W	50W
Installation	Surface	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K	4.000K / 5.000K
Lumens	1.150 lm / 1.200 lm	3.550 lm / 3.600 lm	5.950 lm / 6.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code	4.000K 4349	5.000K 4350	4.000K 4308	5.000K 4351	4.000K 4352	5.000K 4353	4.000K 4309	5.000K 4310	4.000K 4354	5.000K 4355	4.000K 4311	5.000K 4356
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

1/32

1/24

1/12

## Accessories

Optional spike  
4027

CE RoHS




5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C / -20°C | AKZO NOBEL | MICROWAVE SENSOR | 5 sec / 5 min | 1m / 7m | ON / OFF | >1KV



Sky 10W

Sky 20W

Sky 30W





Technical Information

Power	10W	20W	30W
Installation	Surface	Surface	Surface
Color Temperature	5.000K	2.700K / 4.000K / 5.000K	2.700K / 4.000K / 5.000K
Lumens	1.150 lm	2.250 lm / 2.400 lm / 2.450 lm	3.450 lm / 3.600 lm / 3.650 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	Black / Corten	Gray / Corten

Code	<input type="checkbox"/> 5.000K 4254	<input checked="" type="checkbox"/> 5.000K 4266	<input type="checkbox"/> 3.000K 4276
	<input checked="" type="checkbox"/> 5.000K 4257	<input type="checkbox"/> 2.700K 4401	<input type="checkbox"/> 2.700K 4279
		<input type="checkbox"/> 4.000K 4402	<input type="checkbox"/> 4.000K 4280



Accessories






5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C / -20°C | AKZO NOBEL | >1KV

Sky 100W

Sky 150W

Sky 200W

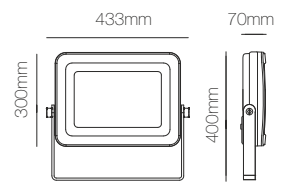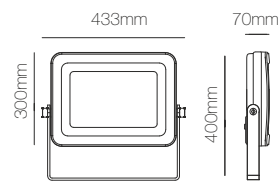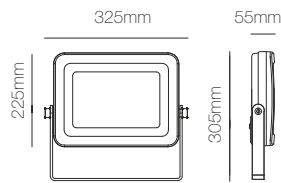

Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	2.200K	2.200K	2.200K
Lumens	7.000 lm	11.000 lm	14.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black
Code	■ 3955	■ 3956	■ 3957

1/4

1/2

1/2











Club Tennis Olesa, Olesa de Montserrat, Design: Padel 10. (Spain).

Polaris 100W

Polaris 150W

Polaris 200W

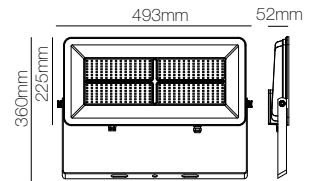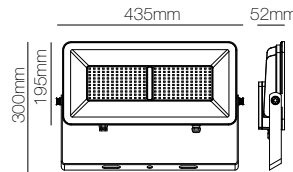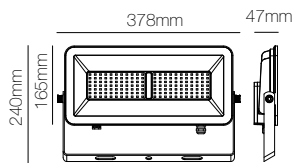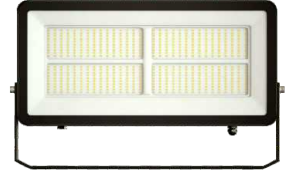

Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	3.000K / 4.000K / 5.000K	3.000K / 4.000K / 5.000K	3.000K / 4.000K / 5.000K
Lumens	12.700 lm / 13.000 lm / 13.200 lm	19.200 lm / 19.500 lm / 19.700 lm	25.700 lm / 26.000 lm / 26.200 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black

Code	■ 3.000K 4513	■ 3.000K 4516	■ 3.000K 4519
	■ 4.000K 4514	■ 4.000K 4517	■ 4.000K 4520
	■ 5.000K 4515	■ 5.000K 4518	■ 5.000K 4521

1/4

1/3

1/3





5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C / -20°C | AKZO NOBEL | >6KV





Krion 300W

Krion 400W

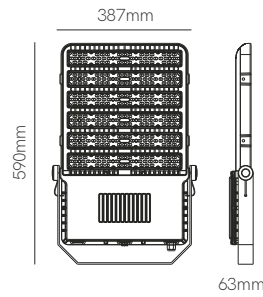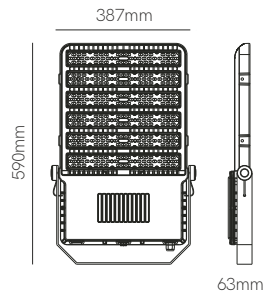


5m	10m	15m	20m
380 lx	100 lx	45 lx	25 lx

5m	10m	15m	20m
470 lx	120 lx	55 lx	30 lx



Technical Information

Power	300W	400W												
Installation	Surface	Surface												
Color Temperature	4.000K / 5.000K	4.000K / 5.000K												
Lumens	39.000 lm / 39.300 lm	52.000 lm / 52.300 lm												
Material	Aluminium	Aluminium												
Finishes	Black	Black												
Code	<table border="0"> <tr> <td>■</td> <td>4.000K</td> <td>4509</td> </tr> <tr> <td>■</td> <td>5.000K</td> <td>4511</td> </tr> </table>	■	4.000K	4509	■	5.000K	4511	<table border="0"> <tr> <td>■</td> <td>4.000K</td> <td>4510</td> </tr> <tr> <td>■</td> <td>5.000K</td> <td>4512</td> </tr> </table>	■	4.000K	4510	■	5.000K	4512
■	4.000K	4509												
■	5.000K	4511												
■	4.000K	4510												
■	5.000K	4512												






5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI ≥80 | 80°x140° | 50/60 Hz | IK10 | +45°C / -25°C | AKZO NOBEL | >6KV | 1





Wech

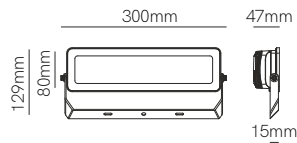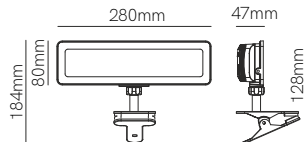

Technical Information

Power	10W
Installation	Portable
Color Temperature	Switch 3.000K / 4.000K / 5.000K
Lumens	600 lm
Material	Aluminium & Polycarbonate
Finishes	White / Black
Code	<input type="checkbox"/> 5004 <input checked="" type="checkbox"/> 5005




Clamp, lyre and charger included.






New

Madi



55mm



130mm

130mm



Technical Information

Power	4W
Installation	Portable
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm
Material	Polycarbonate and ABS
Finishes	White

Code	<input type="checkbox"/> 5154
------	-------------------------------



3 YEARS WARRANTY | 2 YEARS WARRANTY | POWER BANK | SOS | 3-4 HOURS | 100% 6-7H | 50% 12-15H | SOS 16-18H | USB-C 5V 2A | 5.200 mAh | IP 54 | CRI ≥80 | 200° | DIMMABLE | IK08 | +40°C | -10°C | CCT SWITCH | 1