



Profiles and Led strips

BENEITO FAURE

passion for led light



	Model	Page	Section Size	Installation
	BOX 12	192	10x15 mm	 Surface
	BOX 16	166	17,3x7 mm	 Surface
	BOX 18	169	17,3x14,5 mm	 Surface
	BOX 23	172	23x10,8 mm	 Surface
	BOX 28	197	18x22,2 mm	 Surface
NEW	BOX 73	193	21x21 mm	 Surface
NEW	BOX 75	182	16x24,5 mm	  Surface / Pendant
NEW	BOX 99	185	10x12 mm	  Surface / Pendant
	BOX 19	180	25x25 mm	  Surface / Pendant
	BOX 39	196	Ø28 mm	  Surface / Pendant
	BOX 35	176	35x35 mm	  Surface / Pendant
NEW	BOX 95	183	23,25x22 mm	 Recessed
	BOX 11	195	16x15 mm	 Recessed
	BOX 15	167	25x7 mm	 Recessed
	BOX 17	171	25x14,5mm	 Recessed
	BOX 53	173	30,5x10,8mm	 Recessed
	BOX 10	181	35x25 mm	 Recessed

Max Power	IP	Standard finishes	Standard Size
15W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
40W MAX	20 IP	Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	Black White	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	Black	2m
40W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m

	Model	Page	Section Size	Installation
	BOX 38	177	50x35 mm	 Recessed
NEW	BOX 68	175	60x13 mm	 Trimless
	BOX 37	179	79x32 mm	 Trimless
	BOX 14	186	16x16 mm	 Surface / Corner
NEW	BOX 24	189	29,5x17,4 mm	 Recessed
NEW	BOX 60	187	20x16 mm	 Surface / Corner
NEW	BOX 71	190	18,4x18,4 mm	 Surface / Corner
	BOX 13	191	17,9x5,7 mm	 Surface / Flex
	BOX 22	200	17,8x48,6 mm	 Surface
	BOX 27	203	17,7x43,5 mm	 Surface
	BOX 33	201	29,4x50 mm	 Surface
NEW	BOX 98	199	78,8x95 mm	 Surface / Railing
	BOX 21	202	26,2x76,2 mm	 Recessed
NEW	BOX 65	205	15x80 mm	 Surface
NEW	BOX 67	207	65x28 mm	 Surface / Stairs
	BOX 29	208	21x26mm	 Recessed
	BOX 30	209	12x2 mm / 20x2mm	 Surface

Max Power	IP	Standard finishes	Standard Size
40W MAX	20 IP	WhiteBlackAlum.	2m
20W MAX	20 IP	WhiteBlack	2m
40W MAX	40 IP	White	2m
15W MAX	20 IP	WhiteBlackAlum.	2m
20W MAX	20 IP	WhiteBlackAlum.	2m
20W MAX	20 IP	WhiteBlackAlum.	2m
22W MAX	20 IP	WhiteBlackAlum.	2m
15W MAX	20 IP	Alum.	2m
2x15W MAX	20 IP	BlackAlum.	2m
15W MAX	20 IP	WhiteBlackAlum.	2m
20W MAX	20 IP	WhiteBlackAlum.	2m
2x15W MAX	20 IP	WhiteBlack	2m
15W MAX	20 IP	WhiteAlum.	2m
12W MAX	20 IP	WhiteBlackAlum.	2m
12W MAX	20 IP	Black	2m
25W MAX	55 IP	Alum.	2m
20W MAX40W MAX	20 IP	Alum.	2m

Box 16



*Useful area: 12x5mm.



Compatible
led strips p. 294.

Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 16121 ☒ 16122

☐

①

Custom RAL

①

Electrolytic Plating

① Consult delivery terms and conditions.



Accessories

Diffuser PC Transp. 90% ☐ 20450	Diffuser PC Opal 70% ☐ 20440	Diffuser PC Black 50% ☒ 20472	Diffuser Silicone Opal 60% ☐ 20469 ☐ 20469-15	End Cap ☐ 16631 ☒ 16632 ☐ 16633	End Cap ☐ 16621 ☒ 16622 ☐ 16623	Clip Metallic ☐ 20330	Clip Rotable Metallic ☐ 20350	Clip PC ☐ 20380 ☒ 20382




3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

Box 15



*Useful area: 12x5mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 15121 ☐ 15122 ☐ 15119 Custom RAL Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Transp. 90%	Diffuser PC Opal 70%	Diffuser PC Black 50%	Diffuser Silicone Opal 60%	End Cap	End Cap
☐ 20450	☐ 20440	☒ 20472	☐ 20469 ☐ 20469-15	☐ 15631 ☒ 15632 ☐ 15633	☐ 15621 ☒ 15622 ☐ 15623



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063




Box 18



*Useful area: 12x10mm.

Compatible
led strips p. 294.




Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 18121 ☐ 18122 ☐ 18119 ① Custom RAL ① Electrolytic Plating

① Consult delivery terms and conditions.

Accessories



Diffuser PC Transp. 90% ☐ 20450	Diffuser PC Opal 70% ☐ 20440	Diffuser PC Black 50% ☐ 20472	Diffuser Silicone Opal 60% ☐ 20469 ☐ 20469-15	End Cap ☐ 18631 ☐ 18632 ☐ 18633	End Cap ☐ 18621 ☐ 18622 ☐ 18623	Diffuser PC Optic 60° Transp. 90% ☐ 20430	End Cap 60° ☐ 18651 ☐ 18652 ☐ 18653	End Cap 60° ☐ 18661 ☐ 18662 ☐ 18663	Clip Metallic ☐ 20330	Clip Rotable Metallic ☐ 20380 ☐ 20382 ☐ 20350	Clip PC ☐ 20380 ☐ 20382



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063




Box 17



*Useful area: 12x10mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 17121 ☒ 17122 ☐ 17119 ① Custom RAL ① Electrolytic Plating

① Consult delivery terms and conditions.


Accessories

Diffuser PC Transp. 90%	Diffuser PC Opal 70%	Diffuser PC Black 50%	Diffuser Silicone Opal 60%	End Cap	End Cap
☐ 20450	☐ 20440	☒ 20472	☐ 20469 ☐ 20469-15	☐ 17631 ☒ 17632 ☐ 17633	☐ 17621 ☒ 17622 ☐ 17623



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

Box 23



*Useful area: 20x6mm.



 +   Compatible led strips p. 294.

Technical Information

Max. power	25W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 23121 ☒ 23122

☐

①

 Custom RAL

①

 Electrolytic Plating

① Consult delivery terms and conditions.



Accessories

			
Diffuser PC Opal 70% ☐ 23480	End Cap ☐ 23631 ☒ 23632 ☐ 23633	End Cap ☐ 23621 ☒ 23622 ☐ 23623	Clip PC ☐ 23380




3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063

Box 53



*Useful area: 20x6mm.

Compatible
led strips p. 294.



Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 53121 ☒ 53122 ☐ 53119 ① Custom RAL ① Electrolytic Plating

① Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 23480




End Cap
☐ 53631
☒ 53632
☐ 53633



End Cap
☐ 53621
☒ 53622
☐ 53623






3 YEARS WARRANTY | IP 20 | 2m Max AL 6063

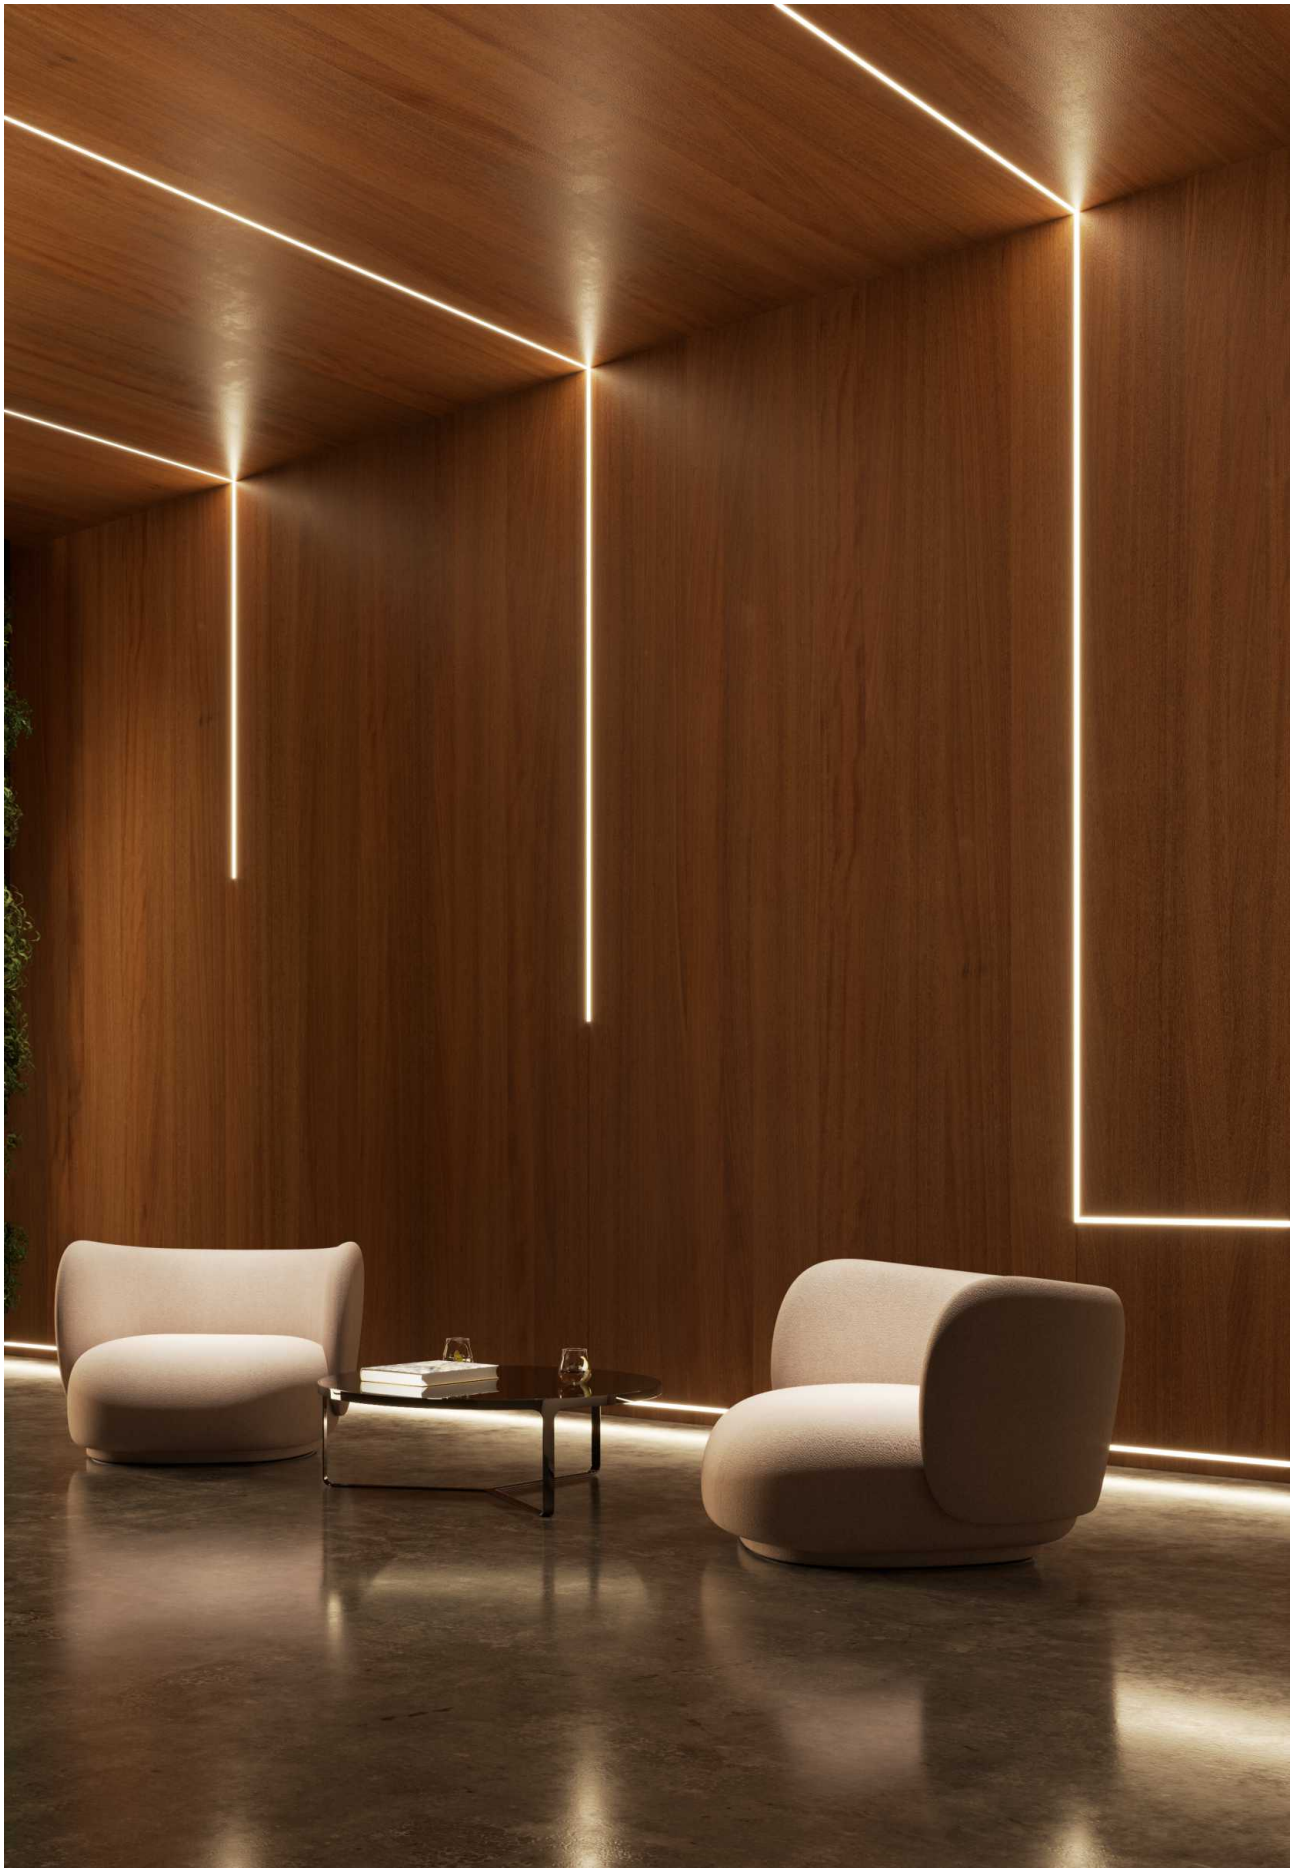


New


Box 68

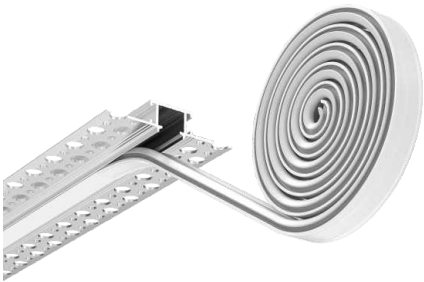

*Useful area: 12x3mm.



Compatible
led strips p. 294.



Technical Information


Max. power	20W/m
Installation	Trimless
Material	Aluminium
Finishes	White / Black
Code	☐ 68121 ☒ 68122

Accessories

						
Diffuser Continuous ☐ 68997	Diffuser Continuous ☒ 68502	End Cap ☐ 68631 ☒ 68632	End Cap ☐ 68621 ☒ 68622	Joint 90° Metallic ☒ 68450	Joint 90° Metallic ☒ 68510	Joint 180° Metallic ☒ 68520



Box 35



*Useful area: 23x20mm.



+ Compatible
led strips p. 294.

Technical Information

Max. power	40W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 35121 ☒ 35122 ☐ 35119 ☒ Custom RAL ☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 20700



Diffuser PC
Black 50%
☒ 20772



End Cap
☐ 35621
☒ 35622
☐ 35623



Clip
Metallic
☒ 35330



Joint 90°
Metallic
☒ 20510



Joint 90°
Metallic
☒ 20540



Joint 120°
Metallic
☒ 20530



Joint 180°
Metallic
☒ 20520



Suspension Kit
Metallic
☒ 20720 (2m)





Base 455x47x28mm
☐ 35331 ☒ 35332 (30W/24V)
☐ 35361 ☒ 35362 (60W/24V)
☐ 35311 ☒ 35312 (100W/24V)

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 38



*Useful area: 23x20mm.

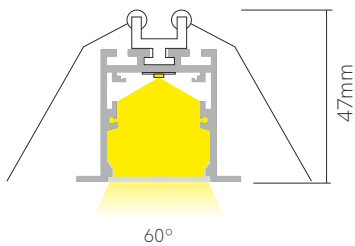

Compatible
led strips p. 294.  +  



Technical Information

Max. power	40W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 38121
	☒ 38122
	☐ 38119
	 Custom RAL
	 Electrolytic Plating

 Consult delivery terms and conditions.

Accessories

							
Diffuser PC Opal 70% ☐ 20700	Diffuser PC Black 50% ☒ 20772	End Cap ☐ 38621 ☒ 38622 ☐ 38623	Joint 90° Metallic ☒ 20510	Joint 90° Metallic ☒ 20540	Joint 120° Metallic ☒ 20530	Joint 180° Metallic ☒ 20520	Spring Clip Metallic ☒ 20710





3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063




Private Residence, Guadalajara (Spain). Design: Carlos Lozano.

Box 37

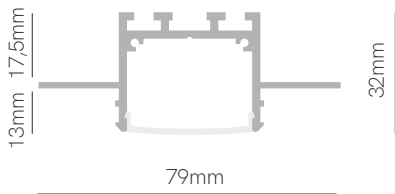

*Useful area: 23x20mm.

Compatible
led strips p. 294.



Technical Information

Max. power	40W/m
Installation	Trimless
Material	Aluminium
Finishes	White
Code	☐ 37121
	☒ Custom RAL
	☒ Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
37480





End Cap
37621



3 YEARS WARRANTY | IP 40 | 2m Max | AL 6063

Box 19



*Useful area: 12x17,7mm.



Technical Information

Max. power	25W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 19121 ☒ 19122 ☐ 19119 ☒ Custom RAL ☒ Electrolytic Plating

Consult delivery terms and conditions.



Accessories

Diffuser PC Opal 70% ☐ 20490	Diffuser PC Black 50% ☒ 20502	Diffuser Continuous ☐ 20997	End Cap ☐ 19621 ☒ 19622 ☐ 19623	Clip Metallic ☐ 19330	Joint 90° Metallic ☐ 20510	Joint 90° Metallic ☐ 20540	Joint 120° Metallic ☐ 20530	Joint 180° Metallic ☐ 20520	Suspension Kit Metallic ☐ 20720 (2m)	Base 455x47x28mm ☐ 35331 ☒ 35332 (30W/24V) ☐ 35361 ☒ 35362 (60W/24V) ☐ 35311 ☒ 35312 (100W/24V)




3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 10



*Useful area: 12x17,7mm.

Compatible
led strips p. 294.



Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 10121
	☒ 10122
	☐ 10119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70% ☐ 20490	Diffuser PC Black 50% ☒ 20502	Diffuser Continuous ☐ 20997	End Cap ☐ 10621 ☒ 10622 ☐ 10623	Joint 90° Metallic ☒ 20510	Joint 90° Metallic ☒ 20540	Joint 120° Metallic ☒ 20530	Joint 180° Metallic ☒ 20520	Spring Clip Metallic ☒ 20710



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

New

Box 75



*Useful area: 12x3mm.



Compatible
led strips p. 294.

Technical Information

Max. power	15W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 75121 ☐ 75122

☐① Custom RAL① Electrolytic Plating

① Consult delivery terms and conditions.

Accessories




Opal Prismatic ☐ 75440	End Cap ☐ 75621 ☐ 75622 ☐ 75623	Hanging bracket Metallic ☐ 75330	Suspension Kit Metallic ☐ 75720 (2m)



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063


New

Box 95



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	22W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 95121
	☒ 95122
	☐ 95119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Opal
Prismatic
☐ 75440



End Cap
☐ 95631
☒ 95632
☐ 95633



End Cap
☐ 95621
☒ 95622
☐ 95623



Clip
Metallic
☒ 24710



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063




New

Box 99



*Useful area: 8x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 99121
	☒ 99122
	Custom RAL
	Electrolytic Plating

Consult delivery terms and conditions.


Accessories

Diffuser PC	End Cap	Suspension Kit	Joint 90°	Joint 90°	Joint 180°
Opal 70%	☐ 99621	Metallic	Metallic	Metallic	Metallic
☐ 99440	☒ 99622	☐ 99721 (2m)	☐ 99510	☐ 99540	☐ 99520
		☒ 99722 (2m)	☒ 99512	☒ 99542	☒ 99522




3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 14



*Useful area: 10x5mm.



Compatible
led strips p. 294.

Technical Information

Max. power	15W/m
Installation	Surface / corner
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 14121 New
	☒ 14122 New
	☐ 14119
	☒ Custom RAL
	☒ Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 14480



End Cap
☐ 14631
☒ 14632
☐ 14633



End Cap
☐ 14621
☒ 14622
☐ 14623







Clip
Metallic
☐ 14330



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063


New

Box 60



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Surface / corner
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 60121 ☐ 60122

☐

①

Custom RAL


②

Electrolytic Plating

① Consult delivery terms and conditions.

Accessories

Diffuser PC	End Cap	End Cap	Clip
Opal 70%	☐ 60631	☐ 60621	Metallic
☐ 60440	☒ 60632	☒ 60622	☐ 60330
	☐ 60633	☐ 60623	






3 YEARS WARRANTY | IP 20 | 30°-60° | 2m Max | AL 6063




New

Box 24



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 24121
	☒ 24122
	☐ 24119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC Opal 70%	End Cap	End Cap	Spring Clip Metallic
☐ 24440	☐ 24631 ☒ 24632 ☐ 24633	☐ 24621 ☒ 24622 ☐ 24623	☒ 24710



3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

New

Box 71



*Useful area: 14x5mm.



Compatible
led strips p. 294.

Technical Information

Max. power	22W/m
Installation	Surface / corner
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 71121 ☒ 71122

☐

①

 Custom RAL

①

 Electrolytic Plating

① Consult delivery terms and conditions.



Accessories

			
Diffuser PC Opal 70% ☐ 71440	End Cap ☐ 71631 ☒ 71632 ☐ 71633	End Cap ☐ 71621 ☒ 71622 ☐ 71623	Clip Metallic ☐ 71330




3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063

Box 13



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	15W/m
Installation	Surface / flex
Material	Aluminium
Finishes	Aluminium
Code	 13113


Accessories

			
Diffuser PC Opal 70%  13480	End Cap  13633	End Cap  13623	Clip Metallic  13330



3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063

Box 12



*Useful area: 5x10mm.



 +   Compatible led strips p. 294.

Technical Information

Max. power	15W/m
Installation	Surface
Material	Aluminium
Finishes	Aluminium
Code	☐ 12119 ①  Custom RAL ②  Electrolytic Plating

① Consult delivery terms and conditions.

Accessories



			
Diffuser PC Opal 70% ☐ 20480	End Cap ☐ 12633	End Cap ☐ 12623	Clip Metallic ☐ 20730



3 YEARS WARRANTY | IP 20 |  2m Max  AL 6063


New

Box 73



*Useful area: 12x7mm.

Compatible
led strips p. 294.



Technical Information

Max. power	22W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 73121
	☒ 73122
	☐ 73119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 73440



End Cap
☐ 73621
☒ 73622
☐ 73623




End Cap
☐ 73631
☒ 73632
☐ 73633



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063




Box 11



*Useful area: 5x10mm.

Compatible
led strips p. 294.



Technical Information

Max. power	15W/m
Installation	Recessed
Material	Aluminium
Finishes	Aluminium
Code	☐ 11119
	☒ Custom RAL
	☒ Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
☐ 20480

End Cap
☐ 11633

End Cap
☐ 11623




3 YEARS
WARRANTY

| IP
20


| | 2m
Max

| AL
6063


Box 39



Opal



Angle 30°/ Transparent



90°



30°

*Useful area: 12x8mm.

Compatible
led strips p. 294.

Technical Information

Max. power	25W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	Black
Code	■ 39122 ① Custom RAL ① Electrolytic Plating

① Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
■ 39440Diffuser PC
Transp. 90%
■ 39450Diffuser PC
Optic 30%
■ 39430End Cap
■ 39622Clip
Plastic
■ 25530Suspension Kit
■ 25887 (2m)Base 455x47x28mm

□

35331 (30W/24V)

■

35332 (30W/24V)

□

35361 (60W/24V)

■

35362 (60W/24V)

□

35311 (100W/24V)

■

35312 (100W/24V)



3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 28



*Useful area: 12x5mm.

Compatible
led strips p. 294.  +  



Technical Information

Max. power	40W/m
Installation	Surface
Material	Aluminium
Finishes	Aluminium
Code	☐ 28119 ①  Custom RAL ②  Electrolytic Plating

① Consult delivery terms and conditions.

Accessories



Diffuser PC
Optic 30%
 28430



End Cap
 28633




End Cap
 28623



Clip
Metallic
 28330





3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063

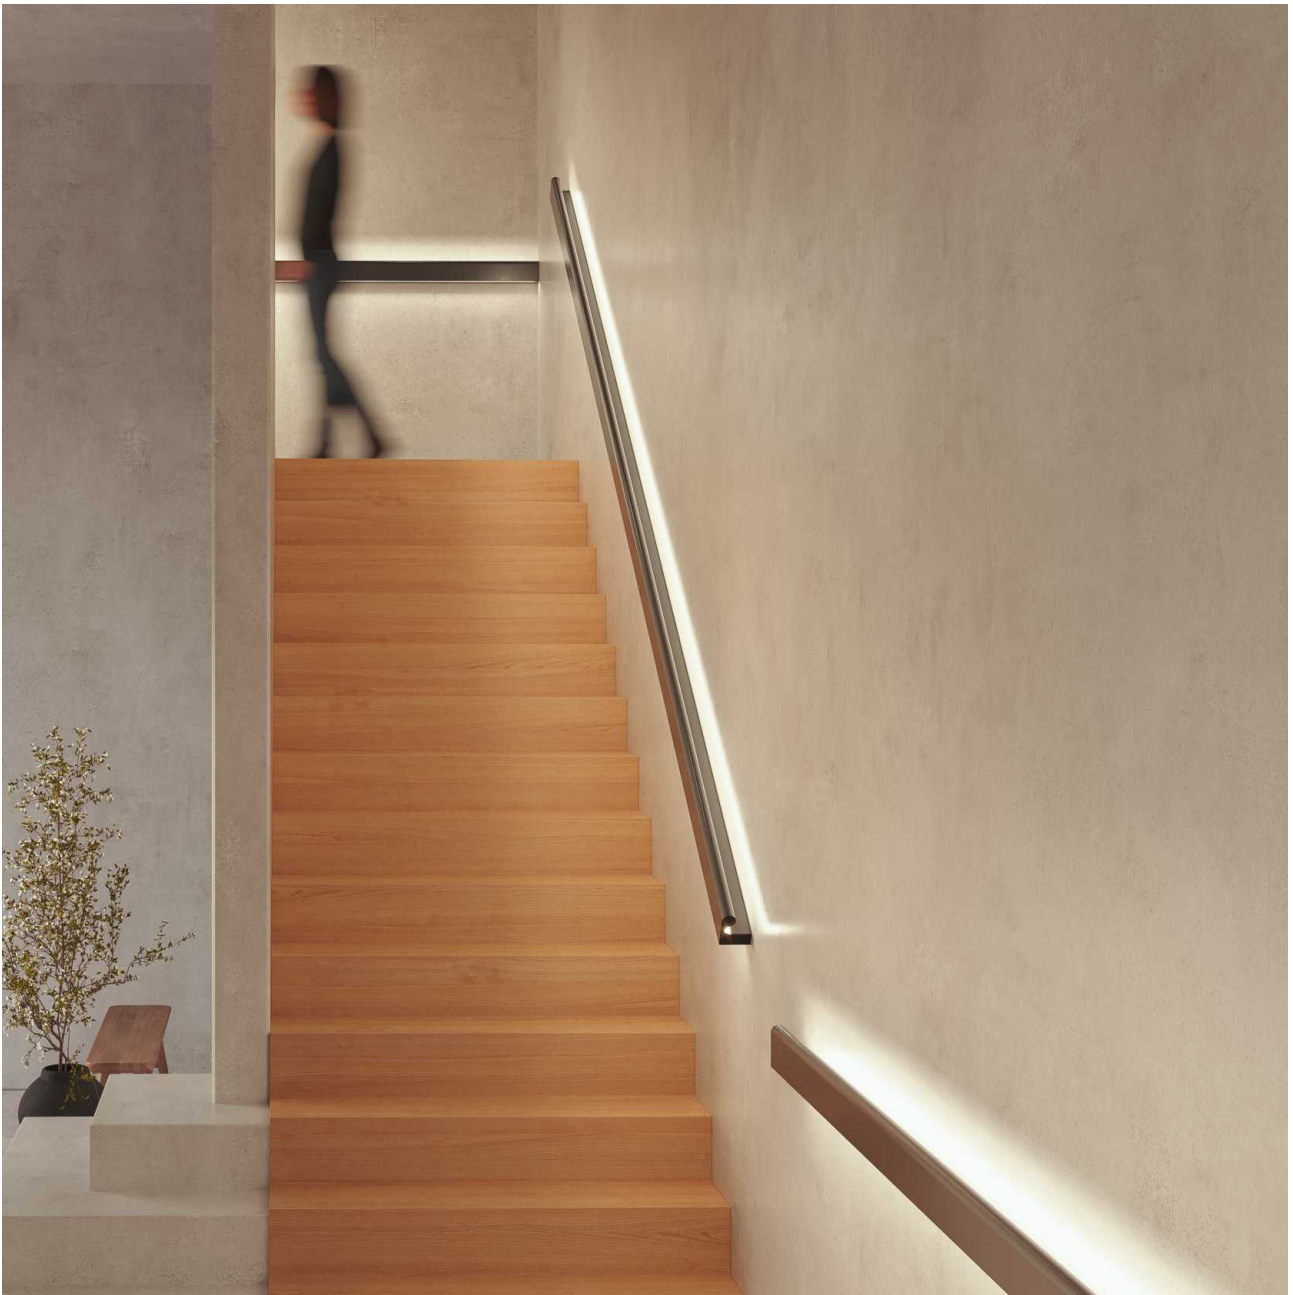

New

Box 98 railing



Compatible
led strips p. 294.  +  ✓




Technical Information

Max. power	2x15W/m
Installation	Surface / railing
Material	Aluminium
Finishes	Black / White
Code	☐ 98121
	☒ 98122
	 Custom RAL

 Consult delivery terms and conditions.

Accessories





Diffuser PC
Opal 70%
98440

End Cap
98621
98622

CE RoHS 

3 YEARS WARRANTY | IP 20 |  2m Max  AL 6063

Box 22



 +   Compatible led strips p. 294.

Technical Information

Max. power	2x15W/m
Installation	Surface
Material	Aluminium
Finishes	Black / Aluminium
Code	 22122
	 22119
	 Custom RAL
	 Electrolytic Plating

 Consult delivery terms and conditions.


Accessories

			
Diffuser PC Opal 70%  20497	Diffuser Silicone Opal 60%  20469  20469-15	End Cap  22622  22623	Clip Metallic  22330


 RoHS 

3 YEARS WARRANTY | IP 20 |  2m Max  AL 6063

Box 33

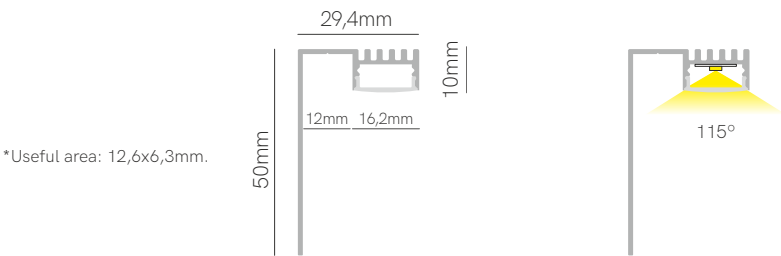

Compatible
led strips p. 294.




Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 33121
	☒ 33122
	☐ 33119
	☒ Custom RAL
	☒ Electrolytic Plating




Consult delivery terms and conditions.

Accessories

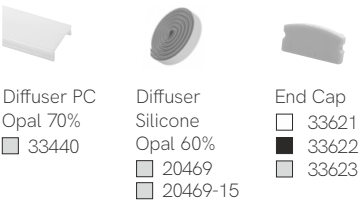

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

Box 21



*Useful area: 12x3mm.



Technical Information

Max. power	15W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Aluminium
Code	☐ 21121 ☐ 21119 ① Custom RAL ① Electrolytic Plating

① Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 20497



Diffuser
Silicone Opal 60%
☐ 20469
☐ 20469-15




End Cap
☐ 21631
☐ 21633



End Cap
☐ 21621
☐ 21623




Box 27



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	15W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 27121 ☐ 27122

☐

①

Custom RAL

①

Electrolytic Plating

① Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 20497



Diffuser
Silicone Opal 60%
☐ 20469
☐ 20469-15



End Cap left
☐ 27631
☐ 27632
☐ 27633



End Cap right
☐ 27621
☐ 27622
☐ 27623




3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063




New

Box 65

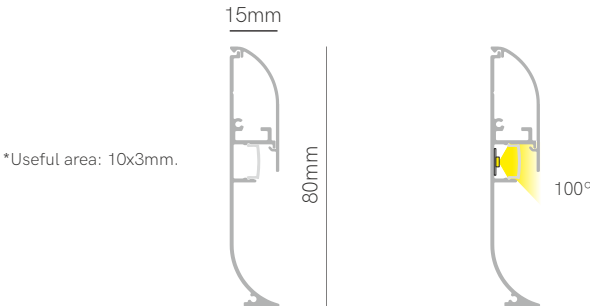

Compatible
led strips p. 294.



Technical Information

Max. power	12W/m
Installation	Surface / skirting
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 65121 ☒ 65122 ☐ 65119 Custom RAL Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70% ☐ 65440	End Cap ☐ 65621 ☒ 65622 ☐ 65623	90° outside connector ☐ 65221 ☒ 65222 ☐ 65223	90° inside connector ☐ 65331 ☒ 65332 ☐ 65333	Joint 180° Metallic ☐ 65550




3 YEARS WARRANTY | IP 20 | 2m Max AL 6063




New


Box 67



*Useful area: 12x3mm.



Compatible
led strips p. 294.



Technical Information

Max. power	12W/m
Installation	Surface / stairs
Material	Aluminium
Finishes	Black
Code	■ 67122

Accessories



Diffuser PC
Opal 70%
■ 67440



End Cap
■ 67632




PVC anti-skid cover
■ 67452



3 YEARS WARRANTY | IP 20 |  2m Max  AL 6063

Box 29



*Useful area: 12x18mm.



 +   Compatible led strips p. 294.

Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium
Finishes	Aluminium
Code	29119 ①  Custom RAL ②  Electrolytic Plating

① Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
 29480




End Cap
 29623




3 YEARS WARRANTY | IP 55 |  |  IK10 |  1000kg | 2m Max  | AL 6063


Box 30 12mm



Box 30 20mm



Compatible
led strips p. 294.



Technical Information

Max. power	20W/m	40W/m
Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	Aluminium	Aluminium
Code	30129 ① Custom RAL ① Electrolytic Plating	30209 ① Custom RAL ① Electrolytic Plating



① Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063



LED Strips

	Model	Page	Power	Width	CCT
NEW	FINE 64	216	2,5W/m	10mm	2700K 3000K 4000K
	FINE 84	219	4,8W/m	10mm	2700K 3000K 4000K 6000K
NEW	FINE 48	217	5W/m	10mm	2200K 2700K 3000K 4000K
	FINE 51	236	9,6W/m	10mm	2700K 3000K 4000K 6000K
	FINE 69	221	9,6W/m	10mm	NEW 2200K 2700K 3000K 4000K 6000K
	FINE 49	235	10W/m	4mm	2700K 3000K 4000K 6000K
	FINE 31	225	12W/m	10mm	NEW 2200K 2700K 3000K 4000K
	FINE 41	223	14,4W/m	10mm	2700K 3000K 4000K 6000K
	FINE 32 N	237	15W/m	12mm	2700K 3000K 4000K 6000K
	FINE 61	227	15W/m	10mm	2700K 3000K 4000K 6000K
NEW	FINE 76	231	15W/m	12mm	3000K 4000K
	FINE 52	229	22W/m	10mm	2700K 3000K 4000K 6000K
	FINE 56	232	22W/m	15mm	2700K 3000K 4000K CCT
	FINE 55	233	24W/m	20mm	2700K 3000K 4000K
NEW	FINE 96	230	18W/m	18,5mm	3000K 4000K RGB-W
	FINE 50	252	9,6W/m	5mm	RGB
NEW	FINE 54	247	14W/m	10mm	RGB
	FINE 46	249	14,4W/m	10mm	RGB
	FINE 43	251	19,2W/m	12mm	RGB


Lumens	CRI	Density	Voltage	IP20	IP65	IP67
110-120 Lm/W					-	-
95-102 Lm/W						-
110-135 Lm/W					-	-
100 Lm/W					-	
87-102 Lm/W						-
71-77 Lm/W					-	-
85-100 Lm/W					-	
92-102 Lm/W						-
100-110 Lm/W				-		-
110-125 Lm/W						-
120-128 Lm/W					-	-
97-112 Lm/W					-	
130-170 Lm/W					-	-
80-86 Lm/W					-	-
67,5-120 Lm/W				-	-	
58 Lm/W	-				-	-
45-50 Lm/W	-				-	
38-41 Lm/W	-					-
90 Lm/W	-				-	-

	Model	Page	Power	Width	CCT
	FINE 47	254	14,4W/m	12mm	
	FINE 66	253	20W/m	12mm	
NEW	FINE 71	255	21W/m	12mm	
	FINE 36	244	12W/m	10mm	
NEW	FINE 63	243	19W/m	10mm	
	FINE 42	245	19,2W/m	10mm	
	FINE 45	257	10W/m	10mm	  
	FINE 44	239	14,4W/m	10mm	   
NEW	FINE RUNNING	259	12W/m	10mm	 
	FINE 25	268	20W/m	Ø25mm	     
	FINE 70	272	5W/m	12,8mm	   
	FINE 72	276	10W/m	16mm	   
	FINE 74	278	10W/m	24mm	   
NEW	FINE SPI-2	260	14W/m	10mm	
NEW	FINE SPI-3	261	11W/m	10mm	
NEW	FINE SPI-4	263	20W/m	Ø25mm	
NEW	FINE DMX-4	264	12W/m	12mm	
NEW	FINE DMX-5	265	17W/m	12mm	

Lumens	CRI	Density	Voltage	IP20	IP65	IP67
18-60 Lm/W	-	60 LED/m	24 VDC		-	-
172 Lm/W	-	840 LED/m	24 VDC		-	
29-117 Lm/W	-	96 LED/m	24 VDC		-	
100 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-
89-95 Lm/W	≥90 CRI	640 LED/m	24 VDC		-	
90 Lm/W	≥90 CRI	168 LED/m	24 VDC			-
15-91 Lm/W	-	480 LED/m	24 VDC		-	
85-95 Lm/W	75/97 CRI	140 LED/m	24 VDC		-	-
79-87 Lm/W	≥90 CRI	360 LED/m	24 VDC		-	-
41-73 Lm/W	≥90 CRI	240-480 LED/m	24 VDC	-	-	
15-37 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
26-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
22-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
37 Lm/W	-	84 LED/m	24 VDC		-	-
51 Lm/W	-	60 LED/m	24 VDC		-	-
12,5 Lm/W	-	168 LED/m	24 VDC	-	-	
42 Lm/W	-	70 LED/m	24 VDC		-	
50 Lm/W	-	70 LED/m	24 VDC		-	

New

Fine 64

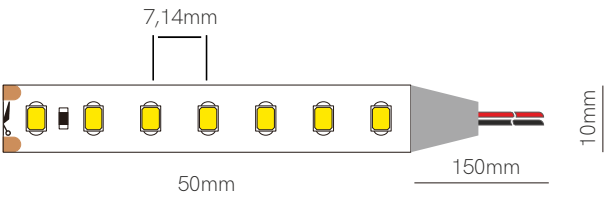

1,5mm | IP20



+ Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,1A / 2,5W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	64270	110 lm/w	275 lm/m	2700K	IP20
	64300	115 lm/w	287 lm/m	3000K	IP20
	64400	120 lm/w	300 lm/m	4000K	IP20

Accessories



Joint
13,8x11,55x3,9mm
 20220



Joint
13,55x11,67x4,7mm
 20120



Joint
15,4x11,5x5,7mm
 20991



Joint
21,6x11,5x5,7mm
 20999



RoHS

*Available in reel of 10 meters.
Accessories pages 282-293.


5 YEARS WARRANTY | 2,5 W/m | 140 LED/m | CRI ≥90 | III | 24 VDC | 50mm | 2835

New

Fine 48

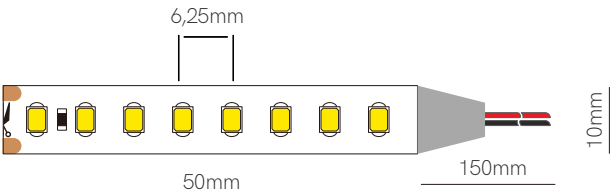

Compatible
profiles p. 294.



Technical Information

V / A / W

24V / 0,2A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	48220	110 lm/w	550 lm/m	2200K	IP20
	48270	120 lm/w	600 lm/m	2700K	IP20
	48300	130 lm/w	650 lm/m	3000K	IP20
	48400	135 lm/w	675 lm/m	4000K	IP20

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
15,4x11,5x5,7mm
20991



Joint
21,6x11,5x5,7mm
20999



*Available in reel of 10 meters.
Accessories pages 282-293.

5 YEARS
WARRANTY

5
W/m

160
LED/m

CRI
≥90

III

24
VDC


50mm

✂


2835



Fine 84

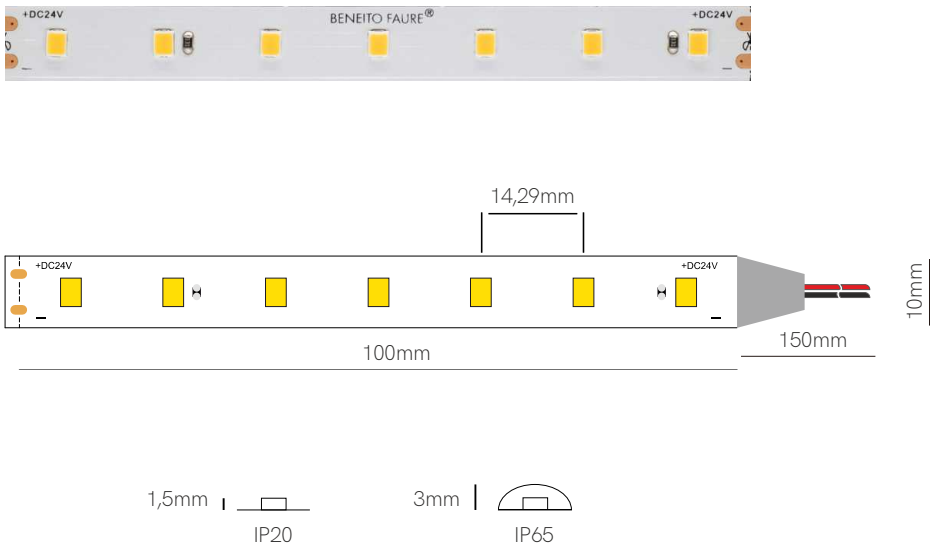

Compatible
profiles p. 294.



Technical Information

V / A / W

24V / 0,2A / 4,8W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	84270	95 lm/w	456 lm/m	2700K	IP20
	84300	98 lm/w	470 lm/m	3000K	IP20
	84400	100 lm/w	480 lm/m	4000K	IP20
	84600	102 lm/w	489 lm/m	6000K	IP20
	84275	90 lm/w	432 lm/m	2700K	IP65
	84305	92 lm/w	441 lm/m	3000K	IP65
	84405	95 lm/w	456 lm/m	4000K	IP65
	84605	97 lm/w	465 lm/m	6000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint	Joint	Joint
20635	20625	13,8x11,55x3,9mm	13,55x11,67x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm	15,4x11,5x5,7mm	21,6x11,5x5,7mm
		20220	20120	20225	20125	20991	20999



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS
WARRANTY

4,8
W/m

70
LED/m

CRI
≥90

III


24
VDC

100mm


2835



Fine 69

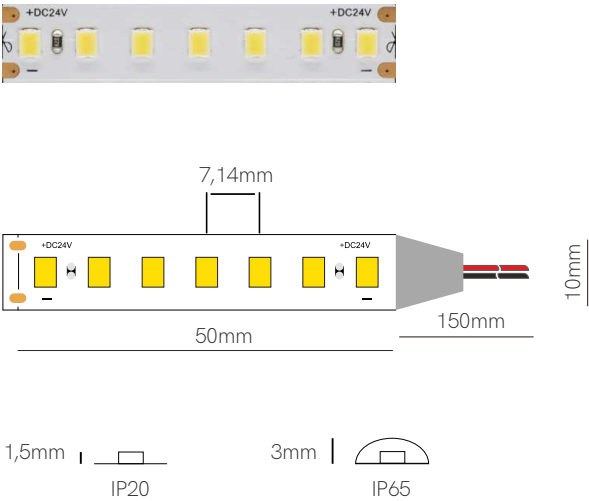

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,4A / 9,6W/m

	Code	Lumen/w	Lumen/m	CCT	IP
Code	69220	New 87 lm/w	835 lm/m	2200K	IP20
	69270	95 lm/w	912 lm/m	2700K	IP20
	69300	98 lm/w	940 lm/m	3000K	IP20
	69400	100 lm/w	960 lm/m	4000K	IP20
	69600	102 lm/w	979 lm/m	6000K	IP20
	69225	New 87 lm/w	835 lm/m	2200K	IP65
	69275	90 lm/w	864 lm/m	2700K	IP65
	69305	92 lm/w	883 lm/m	3000K	IP65
	69405	95 lm/w	912 lm/m	4000K	IP65
	69605	97 lm/w	931 lm/m	6000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint	Joint	Joint
20635	20625	13,8x11,55x3,9mm	13,55x11,67x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm	15,4x11,5x5,7mm	21,6x11,5x5,7mm
		20220	20120	20225	20125	20991	20999



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY

9,6 W/m

140 LED/m

CRI ≥90

III

24 VDC


50mm

✂


2835



Fine 41

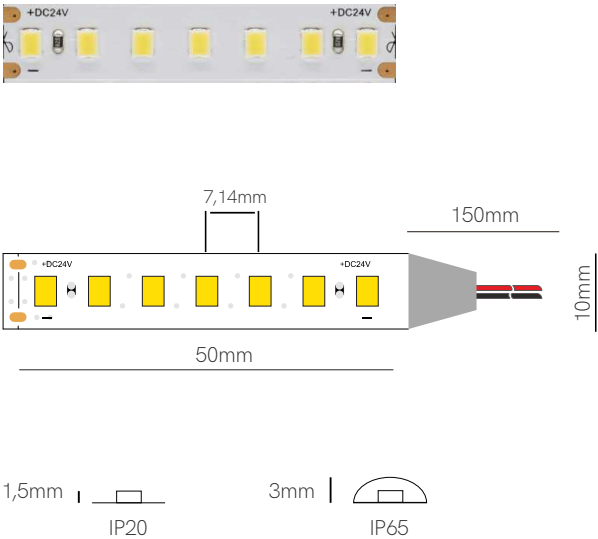

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	41270	95 lm/w	1.368 lm/m	2700K	IP20
	41300	98 lm/w	1.411 lm/m	3000K	IP20
	41400	100 lm/w	1.440 lm/m	4000K	IP20
	41600	102 lm/w	1.468 lm/m	6000K	IP20
	41275	90 lm/w	1.296 lm/m	2700K	IP65
	41305	92 lm/w	1.324 lm/m	3000K	IP65
	41405	95 lm/w	1.368 lm/m	4000K	IP65
	41605	97 lm/w	1.396 lm/m	6000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint	Joint	Joint
20635	20625	13,8x11,55x3,9mm	13,55x11,67x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm	15,4x11,5x5,7mm	21,6x11,5x5,7mm
		20220	20120	20225	20125	20991	20999



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY

14,4 W/m

140 LED/m

CRI ≥90

III

24 VDC


50mm

✂


2835



Fine 31

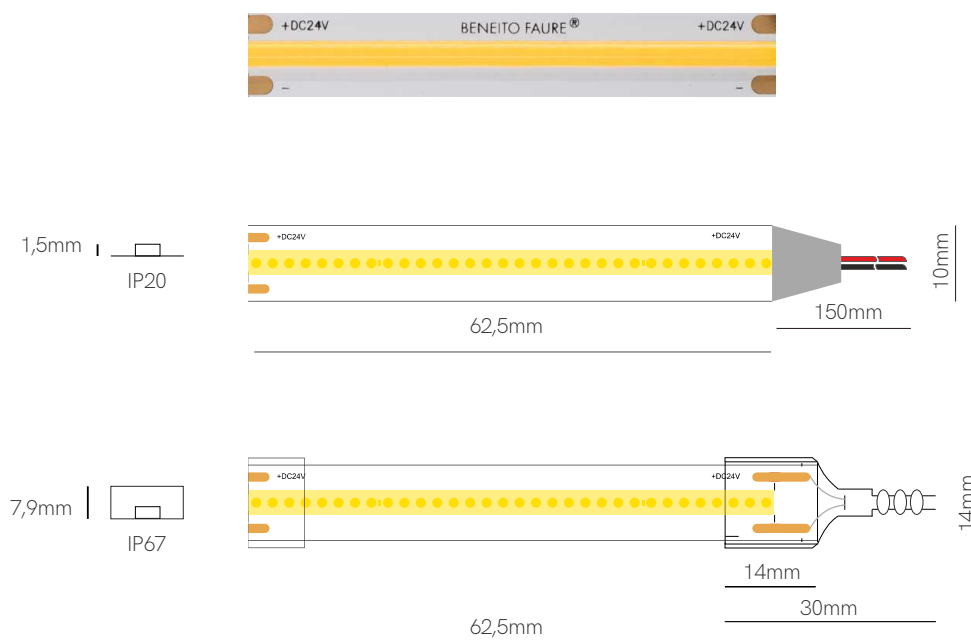

Compatible
profiles p. 294.



Technical Information

V / A / W

24V / 0,5A / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	31220 New	85 lm/w	1.020 lm/m	2200K	IP20
	31270	95 lm/w	1.140 lm/m	2700K	IP20
	31300	98 lm/w	1.176 lm/m	3000K	IP20
	31400	100 lm/w	1.200 lm/m	4000K	IP20
	31227 New	80 lm/w	960 lm/m	2200K	IP67
	31277	90 lm/w	1.080 lm/m	2700K	IP67
	31307	93 lm/w	1.116 lm/m	3000K	IP67
	31407	95 lm/w	1.140 lm/m	4000K	IP67

Accessories



End Cap
32635

End Cap
32625



Joint
31709



Joint
31809



Joint
31909



*Available in reel of 5 meters.

Accessories pages 282-293.

5 YEARS
WARRANTY

12
W/m

512
LED/m




24
VDC

62,5mm






Fine 61

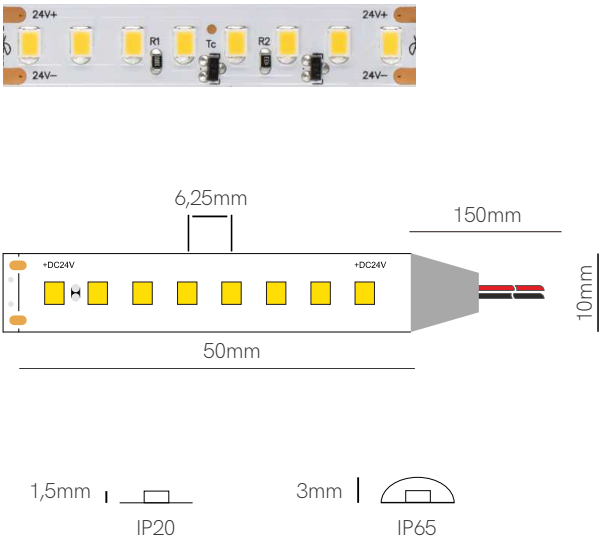

Compatible
profiles p. 294.



Technical Information

V / A / W

24V / 0,62A / 15W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	61270	110 lm/w	1.650 lm/m	2700K	IP20
	61300	115 lm/w	1.725 lm/m	3000K	IP20
	61400	120 lm/w	1.800 lm/m	4000K	IP20
	61600	125 lm/w	1.875 lm/m	6000K	IP20
	61275	110 lm/w	1.650 lm/m	2700K	IP65
	61305	115 lm/w	1.725 lm/m	3000K	IP65
	61405	120 lm/w	1.800 lm/m	4000K	IP65
	61605	125 lm/w	1.875 lm/m	6000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint	Joint	Joint
20635	20625	13,8x11,55x3,9mm	13,55x11,67x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm	15,4x11,5x5,7mm	21,6x11,5x5,7mm
		20220	20120	20225	20125	20991	20999



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY

15 W/m

160 LED/m

CRI ≥90

III

24 VDC


50mm

✂

2835



Fine 52

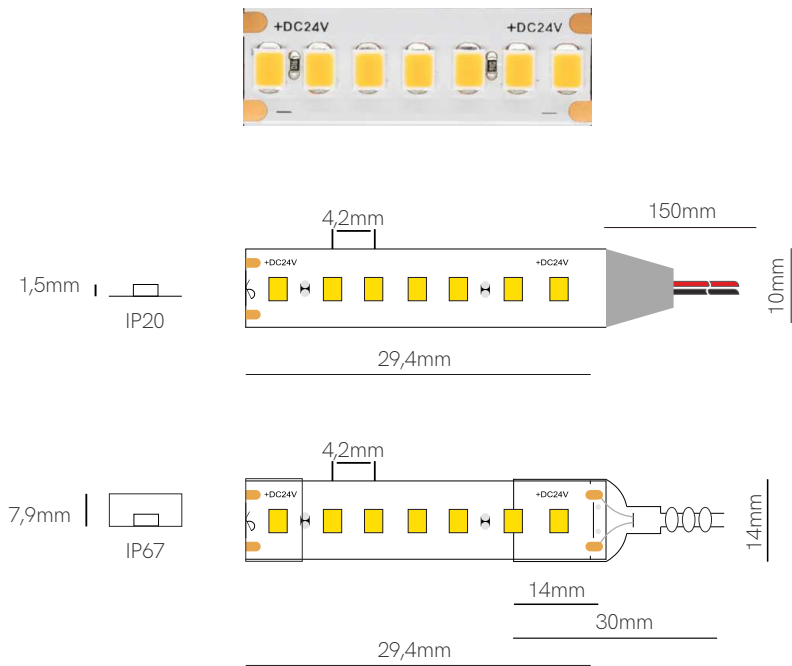

Compatible
profiles p. 294.  +  ✓



Technical Information

V / A / W 24V / 0,91A / 22W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	52270	97 lm/w	2.134 lm/m	2700K	IP20
	52300	103 lm/w	2.266 lm/m	3000K	IP20
	52400	108 lm/w	2.376 lm/m	4000K	IP20
	52600	112 lm/w	2.464 lm/m	6000K	IP20
	52277	97 lm/w	2.134 lm/m	2700K	IP67
	52307	103 lm/w	2.266 lm/m	3000K	IP67
	52407	108 lm/w	2.376 lm/m	4000K	IP67
	52607	112 lm/w	2.464 lm/m	6000K	IP67

Accessories



End Cap
32635



End Cap
32625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS
WARRANTY

22
W/m

238
LED/m

CRI
≥90

III

24
VDC


29,4mm




2835

New

Fine 96

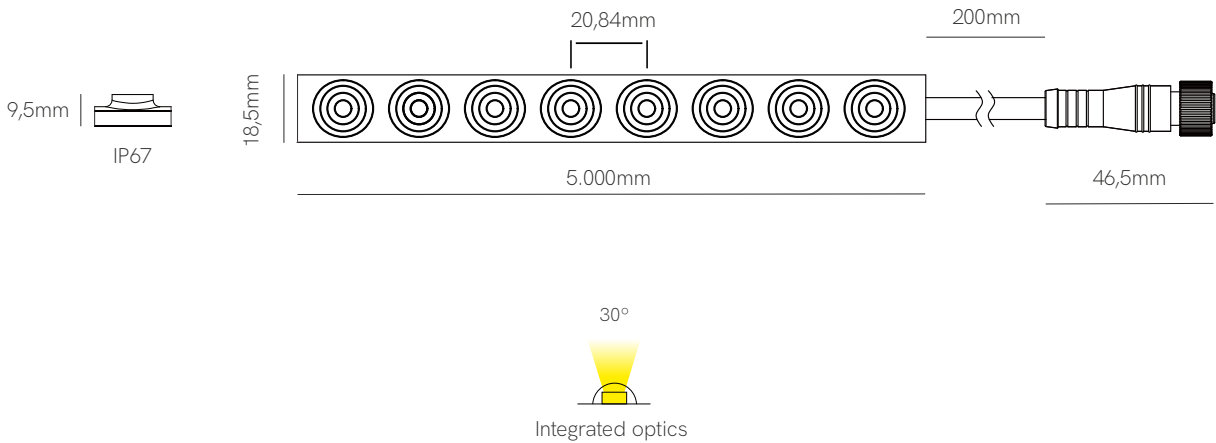

 +   Compatible profiles p. 294.

Technical Information

V / A / W (3.000K / 4.000K)	24V / 0,75A / 18W/m
V / A / W (RGB-W)	24V / 0,33A / 8W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	96307	106 lm/w	1.915 lm/m	3000K	IP67
	96407	120 lm/w	2.167 lm/m	4000K	IP67
	96477	67,5 lm/w	540 lm/m	RGB-W 3.000K	IP67

Accessories



Clip
96119



Clip
96380



Clip
96330



Clip
96350



ADH
96111



Extension cable
☐ 96946-M2
☐ 96946-M4
☐ 96946-H2
☐ 96946-H4



Extension cable
☐ 96920-2
☐ 96920-4



*Available in reel of 5 meters. Accessories pages 282-293.

3 YEARS WARRANTY

18/8 W/m

48 LED/m

CRI ≥90






24 VDC


 2835

New

Fine 76

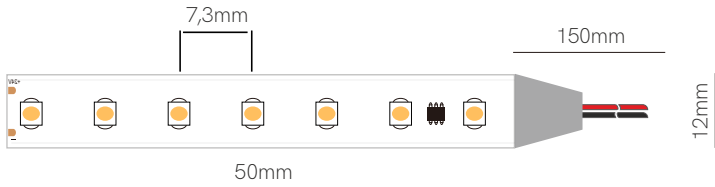

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,62A / 15W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	76300	120 lm/w	1.800 lm/m	3000K	IP20
	76400	128 lm/w	1.920 lm/m	4000K	IP20



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

15 W/m

126 LED/m


CRI ≥80

24 VDC

50mm

2835 LENS

Fine 56

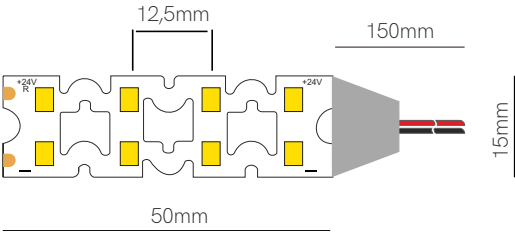

1,5mm |  IP20



 +   Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,91A / 22W/m


	Code	Lumens/w	Lumens/m	CCT	IP
Code	56270	155 lm/w	3.410 lm/m	2700K	IP20
	56300	160 lm/w	3.520 lm/m	3000K	IP20
	56400	170 lm/w	3.740 lm/m	4000K	IP20
	56360	130 lm/w	2.860 lm/m	CCT	IP20




*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 22 W/m | 160 LED/m | CRI ≥80 |  | 24 VDC | 50 mm  |  2835

Fine 55

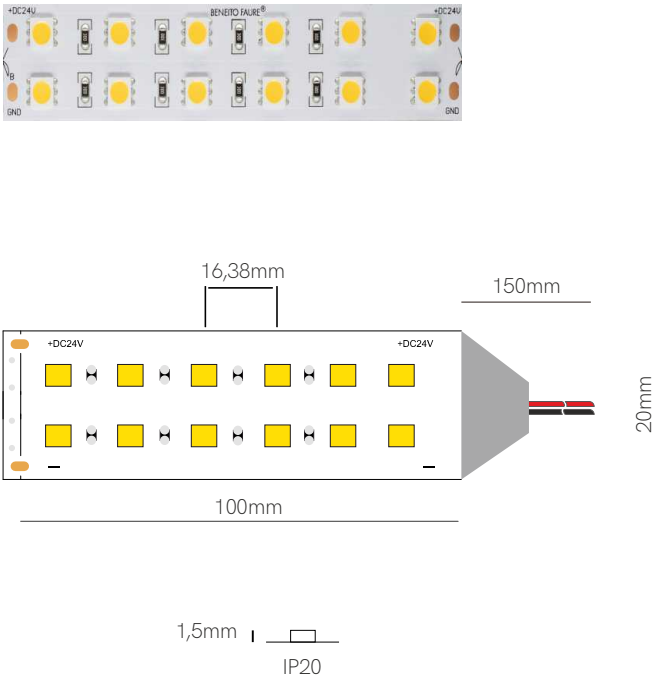

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 1A / 24W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	55270	80 lm/w	1.920 lm/m	2700K	IP20
	55300	83 lm/w	1.992 lm/m	3000K	IP20
	55400	86 lm/w	2.064 lm/m	4000K	IP20





*Available in reel of 5 meters.
Accessories pages 282-293.


5 YEARS WARRANTY | 24 W/m | 120 LED/m | CRI ≥90 | III | 24 VDC | 100mm | 5050



Fine 49

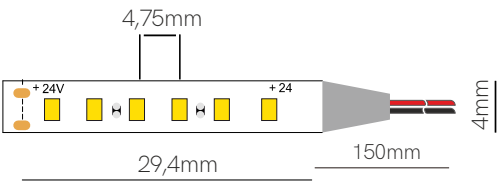

Compatible
profiles p. 294.



Technical Information

V / A / W

24V / 0,4A / 10W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	49270	71 lm/w	710 lm/m	2700K	IP20
	49300	74 lm/w	740 lm/m	3000K	IP20
	49400	77 lm/w	770 lm/m	4000K	IP20
	49600	74 lm/w	740 lm/m	6000K	IP20

Accessories



Joint
20049



Joint
20249



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

10 W/m

204 LED/m

CRI ≥90

III


24 VDC

29,4mm

✂

2216

Fine 51

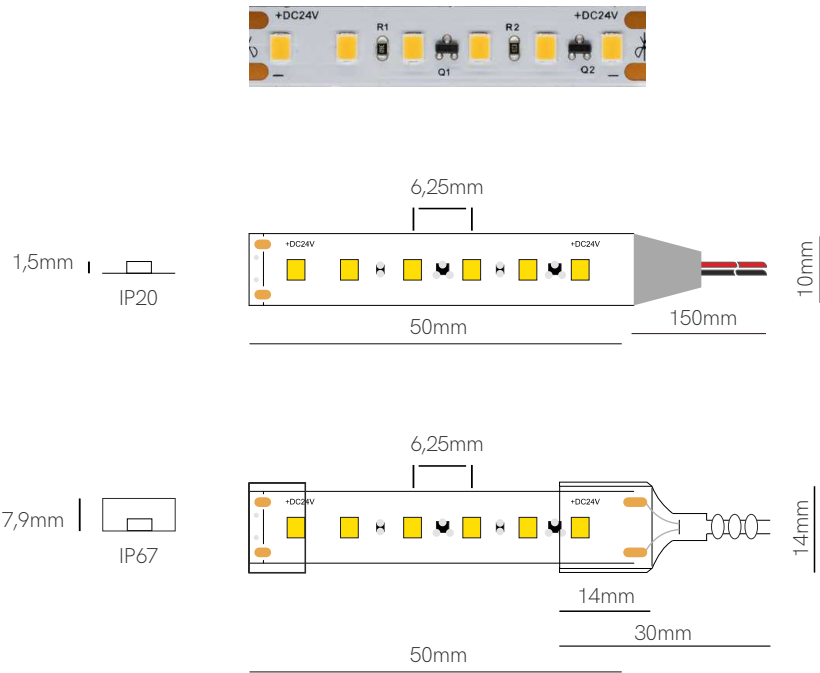

 +   Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,4A / 9,6W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	51270	100 lm/w	960 lm/m	2700K	IP20
	51300	100 lm/w	960 lm/m	3000K	IP20
	51400	100 lm/w	960 lm/m	4000K	IP20
	51600	100 lm/w	960 lm/m	6000K	IP20
	51277	100 lm/w	960 lm/m	2700K	IP67
	51307	100 lm/w	960 lm/m	3000K	IP67
	51407	100 lm/w	960 lm/m	4000K	IP67
	51607	100 lm/w	960 lm/m	6000K	IP67

Accessories




End Cap 32635 End Cap 32625




*Available in reel of 20 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 9,6 W/m | 120 LED/m | CRI ≥90 |  | 24 VDC | ULTRALONG | 50mm  |  2835

Fine 32 N

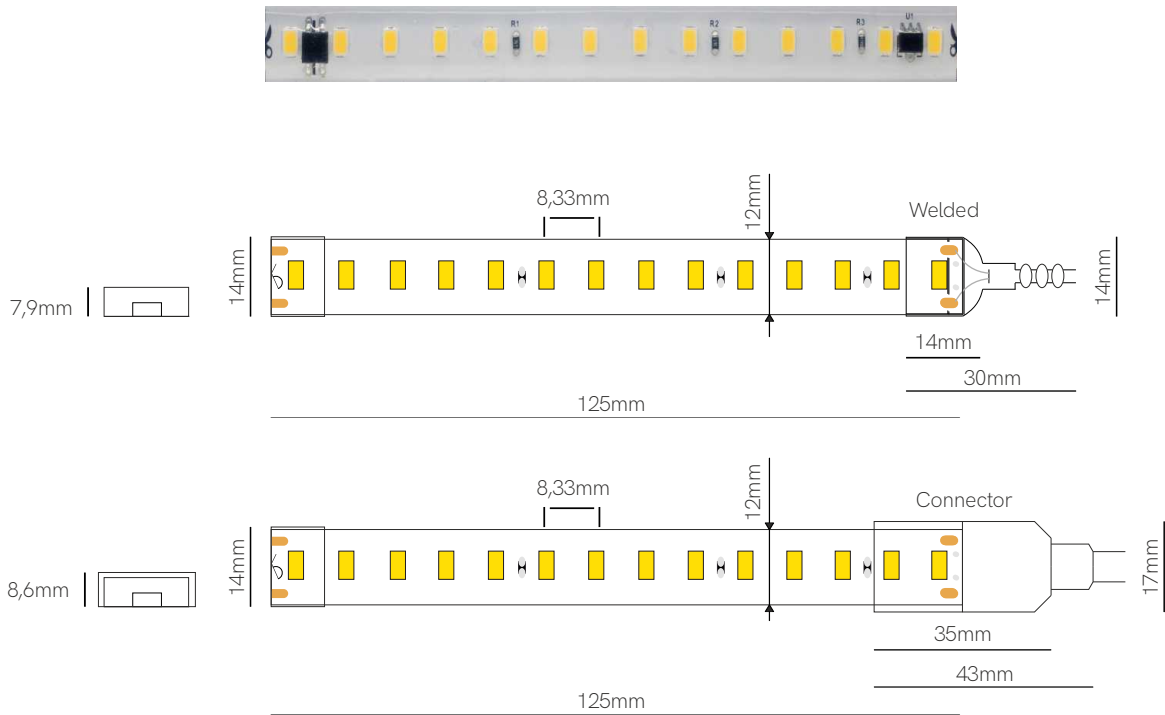

Compatible
profiles p. 294.



Technical Information

V / A / W

220V / 0,068A / 15W/m

Code

Code	Lumen/w	Lumen/m	CCT	IP
32275-N	100 lm/w	1.500 lm/m	2700K	IP65
32305-N	105 lm/w	1.575 lm/m	3000K	IP65
32405-N	110 lm/w	1.650 lm/m	4000K	IP65
32605-N	110 lm/w	1.650 lm/m	6000K	IP65

Accessories



End Cap
32635



End Cap
32625



Connector kit
32699



Join 180°
32899



Join 90°
32499



Clip
32900



Joint
32299



*Available in reel of 5 or 50 meters. Accessories pages 282-293.

3 YEARS
WARRANTY

15
W/m

112
LED/m



CRI
≥ 80

220/240
VAC

125mm




TRIAC DIMM




2835



Fine 44

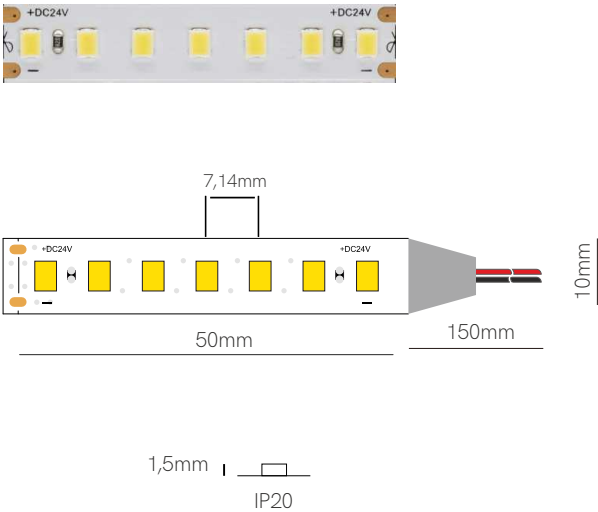

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	44370	85lm/w	1.224 lm/m	MEAT (3.700K)	IP20
	44110	95 lm/w	1.368 lm/m	FISH (11.600K)	IP20
	44500	90 lm/w	1.296 lm/m	FRUIT (5.000K)	IP20
	44270	80 lm/w	1.152 lm/m	BREAD (2.700K)	IP20

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
15,4x11,5x5,7mm
20991



Joint
21,6x11,5x5,7mm
20999



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

14,4 W/m

140 LED/m

CRI 75/97

III

24 VDC

50mm

✂

2835










New

Fine 63

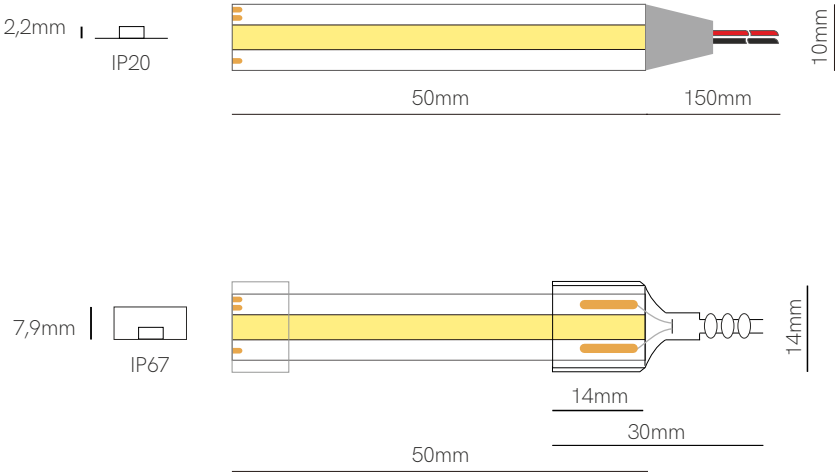

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,79A / 19W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	63360	89-95 lm/w	850-1.750 lm/m	2.700-6.000K	IP20
	63367	89-95 lm/w	850-1.750 lm/m	2.700-6.000K	IP67

Accessories



End Cap
32635



End Cap
32625



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

19 W/m

640 LED/m


CRI ≥90

24 VDC

50mm

COB

Fine 36

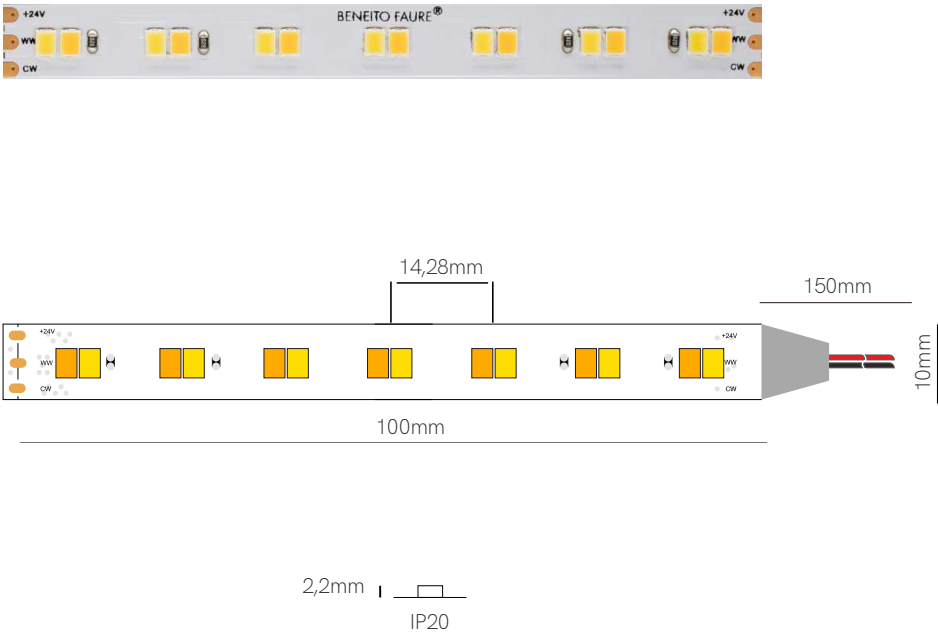

 +   Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,5A / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	36360	100 lm/w	1.200 lm/m	2.700-5.000K	IP20

Accessories



Joint
13,57x11,63x3,5mm
 20230




Joint
13,57x11,63x4,7mm
 20130

 RoHS 


*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 12 W/m | 140 LED/m |  |  | 24 VDC | 100mm  |  2835

Fine 42

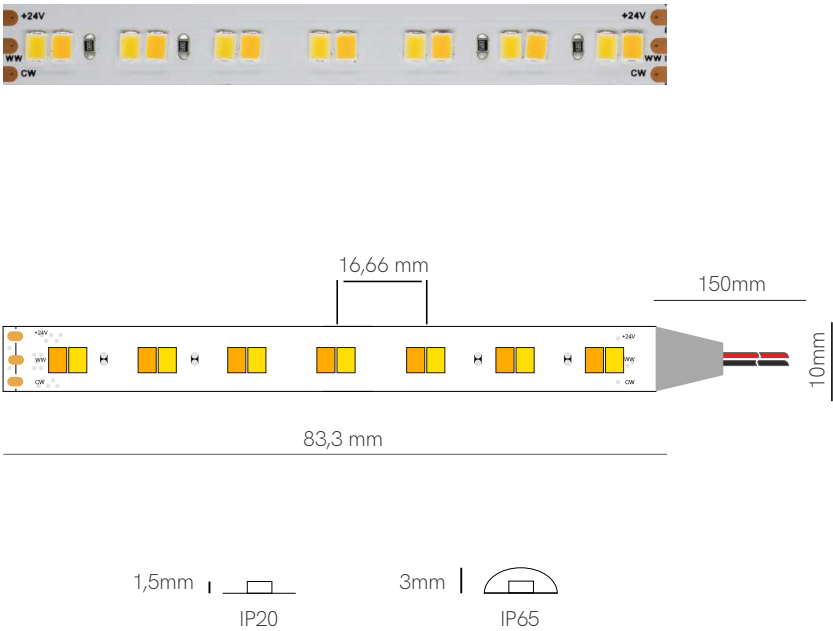

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,8A / 19,2W/m
-----------	----------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	42360	90 lm/w	1.728 lm/m	1.800-4.000K	IP20
	42365	90 lm/w	1.728 lm/m	1.800-4.000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint
20635	20625	13,57x11,63x3,5mm	13,57x11,63x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm
		20230	20130	20235	20135



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY

19,2 W/m

168 LED/m

CRI ≥90

III

24 VDC


83,3mm

2835




New

Fine 54

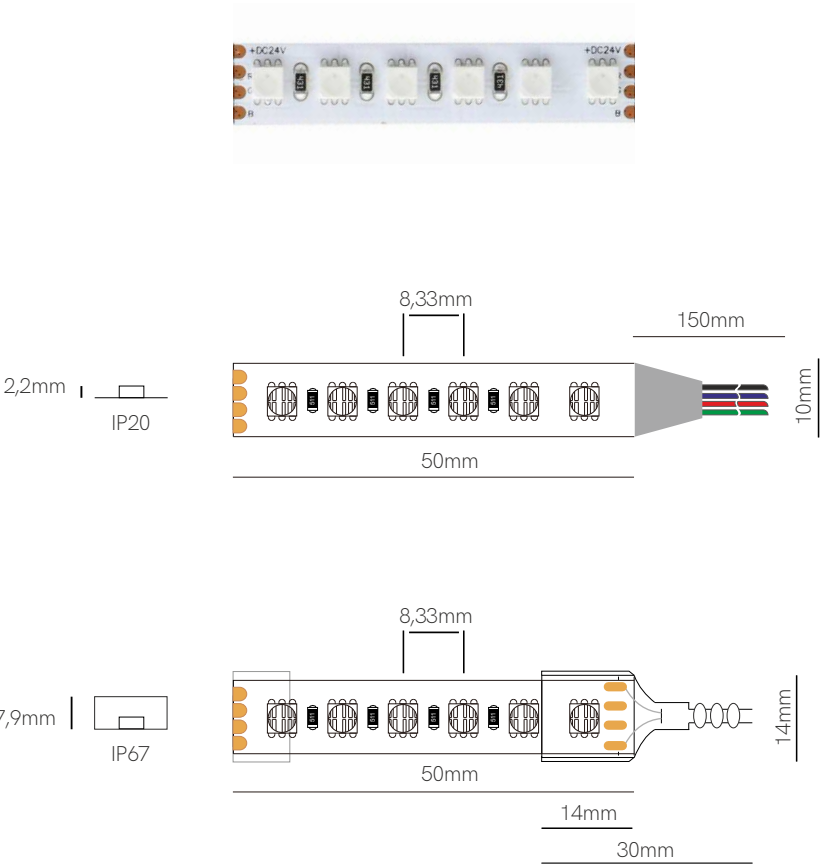

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,6A / 14W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	54460	50 lm/w	700 lm/m	RGB	IP20
	54467	45 lm/w	630 lm/m	RGB	IP67




*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 14 W/m | 120 LED/m | 24 VDC | III | 50mm | 4040




Personal training room, Collbató (Spain).

Fine 46

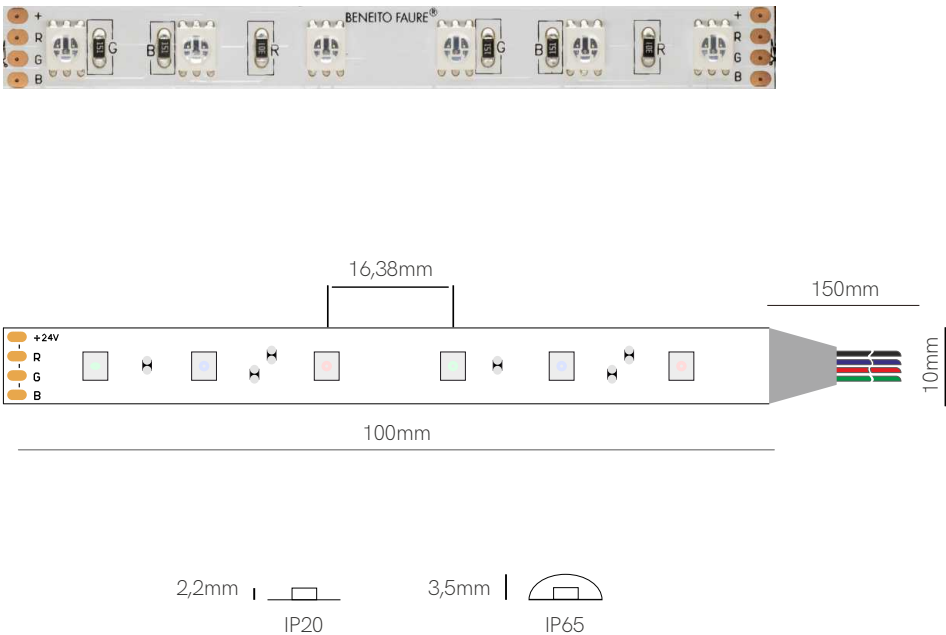

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	46460	38 lm/w	547 lm/m	RGB	IP20
	46465	41 lm/w	590 lm/m	RGB	IP65

Accessories

End Cap
20635

End Cap
20625

Joint
13,54x11,7x4,1mm
20240

Joint
13,56x13,46x4,7mm
20140

Joint
24,3x14,6x7,68mm
20245

Joint
24,3x14,6x7,68mm
20145






*Available in reel of 5 or 25 meters. Accessories pages 282-293.


5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | III | 50mm | 5050



Fine 43

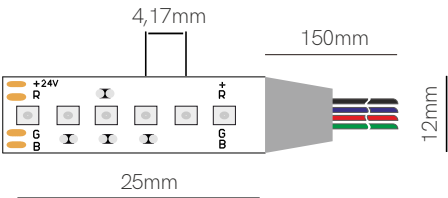

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,8A / 19,2W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	43430	90 lm/w	1.728 lm/m	RGB	IP20



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS
WARRANTY

19,2
W/m



240
LED/m

24
VDC

25mm

3535

Fine 50

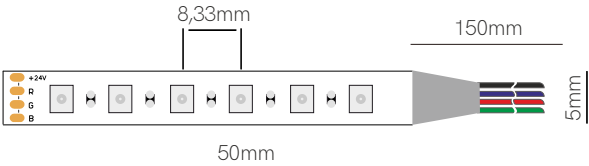

 +   Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,4A / 9,6W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	50460	58 lm/w	556 lm/m	RGB	IP20



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS WARRANTY

9,6 W/m

120 LED/m


24 VDC




50mm 

 2835

Fine 66

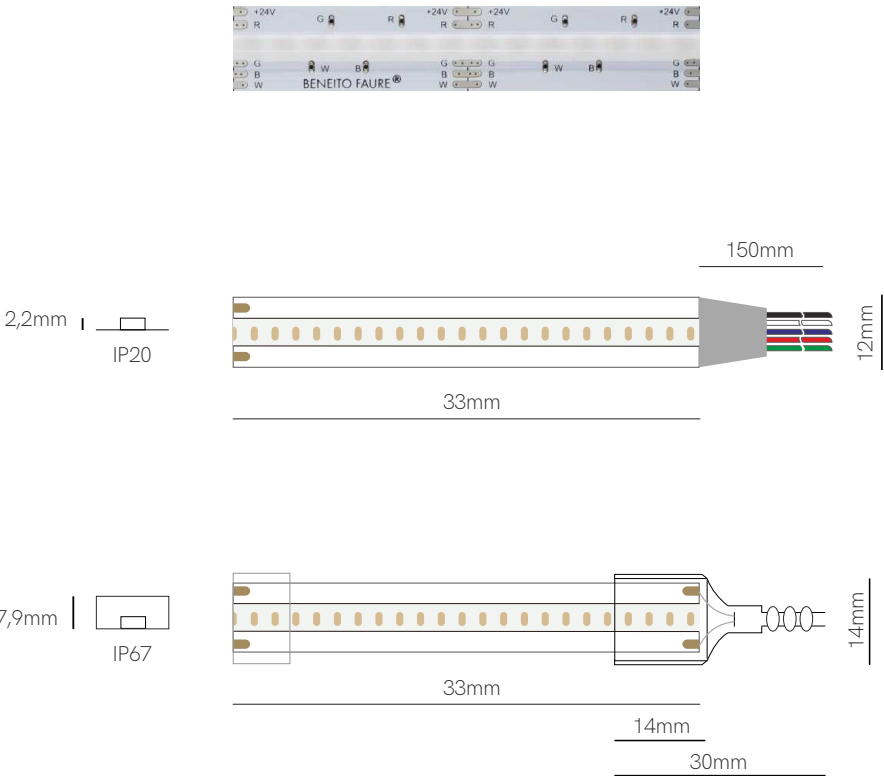

Compatible
profiles p. 294.




Technical Information

V / A / W 24V / 0,83A / 20W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	66470	172 lm/w	830 lm/m	RGB-W 2.700K	IP20
	66477	172 lm/w	830 lm/m	RGB-W 2.700K	IP67

Accessories




CE RoHS

*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 20 W/m | 840 LED/m | 24 VDC | III | 33mm | CSP

Fine 47

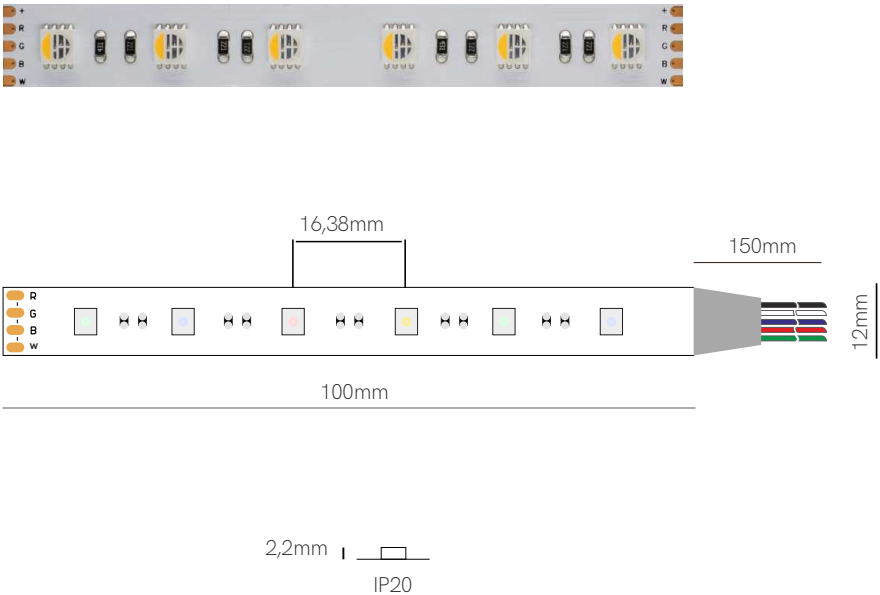

 +   Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,6A / 14,4W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	47430	18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP20
	47440 <i>New</i>	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP20

Accessories



Joint
13,5x13,73x4,2mm
 20150



Joint
13,5x13,55x4,8mm
 20250

*Available in reel of 5 or 25 meters.




Accessories pages 282-293.


5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC |  | 100mm  |  5050

New

Fine 71

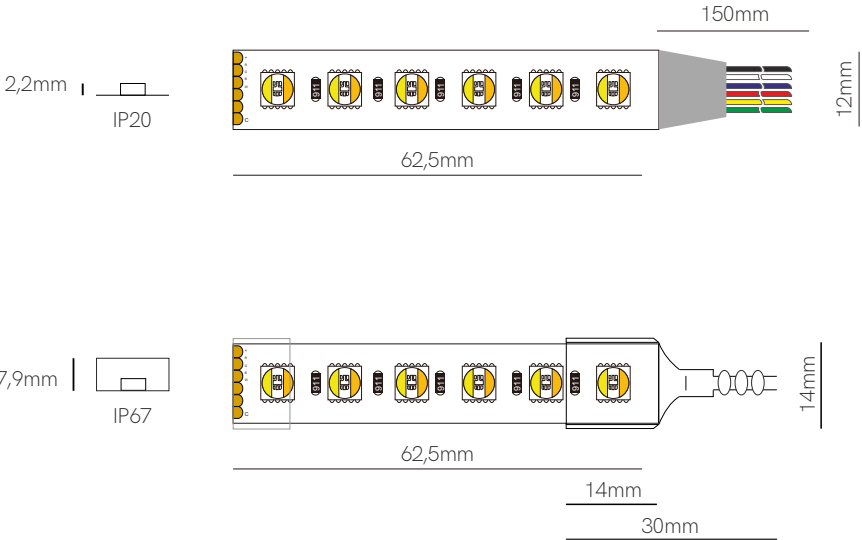

Compatible
profiles p. 294



Technical Information

V / A / W 24V / 0,875A / 21W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	71470	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP20
	71477	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP67




*Available in reel of 5 meters.
Accessories pages 282-293.


5 YEARS WARRANTY | 21 W/m | 96 LED/m | 24 VDC | III | 62,5mm | 5050



Fine 45

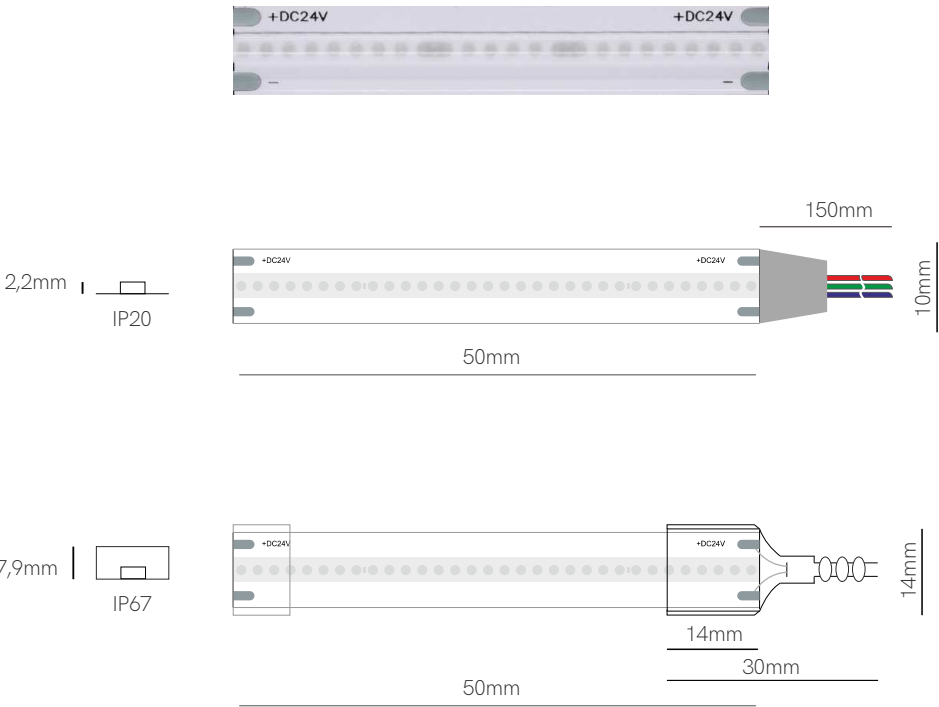

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,41A / 10W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	45220	15	150	RED	IP20
	45310	91	910	GREEN	IP20
	45520	13	130	BLUE	IP20
	45227 New	15	150	RED	IP67
	45317 New	91	910	GREEN	IP67
	45527 New	13	130	BLUE	IP67

Accessories



*Available in reel of 10 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 10 W/m | 480 LED/m | 24 VDC | III | 50 mm | CSP



Running led strip

► VIDEO



Running is the new digital LED strip that provides a new generation of lighting, simulating the movement of light known as running or chase effect, along the strip. Based on pixel by pixel control, its LEDs turn on and off sequentially, generating a displacement of light that causes a more pleasant and dynamic visual experience in space.


We have 2 controllers, SP6329 RF control with 14 different scenes and speed control, and another controller SP9812 developed by BENEITO & FAURE, standard push button control, with which it is possible to adjust the speed of the scenes, the direction in one direction or another of the light and the intensity. Our system is very versatile, adapting to the size of the installations, it can control up to 1024 pixels.

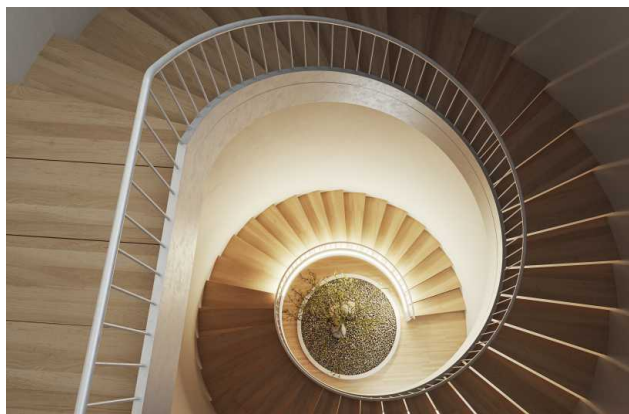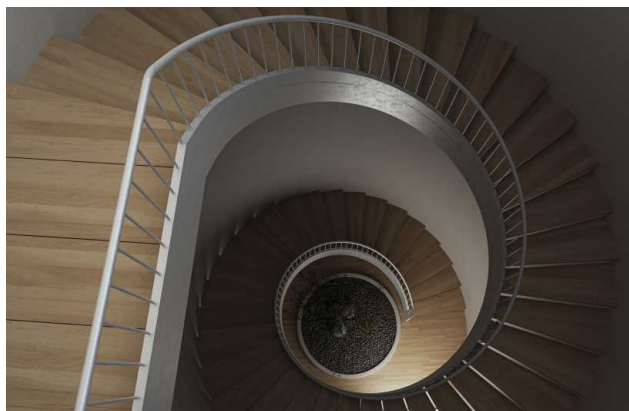


Running es la nueva tira de LED digital que proporciona una iluminación de nueva generación, simulando el movimiento de la luz conocido como efecto running o chase, a lo largo de la tira. Basado en el control pixel a pixel, sus LEDs se encienden y apagan secuencialmente, generando un desplazamiento de la luz que provoca una experiencia visual más agradable y dinámica en el espacio. Disponemos de 2 controladores, SP6329 control RF con 14 escenas diferentes y control de velocidad, y otro controlador SP9812 desarrollado por BENEITO & FAURE, control por pulsador estándar, con el cual es posible ajustar la velocidad de las escenas, la dirección en un sentido u otro de la luz y la intensidad. Nuestro sistema es muy versátil, adaptándose al tamaño de las instalaciones, puede controlar hasta 1024 pixels.

New

Fine running



Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	WS2811 (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP1300	79 lm/w	950 lm/m	3000K	IP20
	SP1400	87 lm/w	1.050 lm/m	4000K	IP20

Control

Code	Version	Power Max	Pixels Max	VDC IN
SP-9812	Controller	-	-	24 VDC
SP-6329	Running Touch Controller	8A	1.024	24 VDC



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS WARRANTY

12 W/m

360 LED/m

CRI ≥90

III

24 VDC

83,3mm



✂

SPI

COB

New

Fine SPI-2

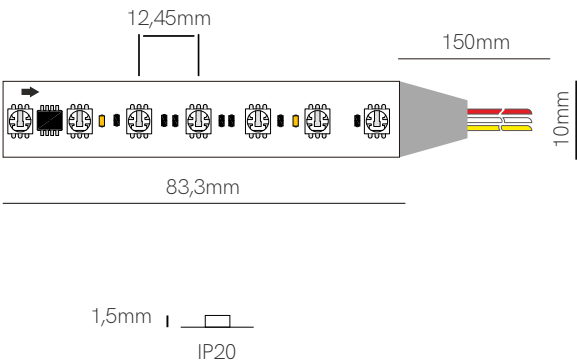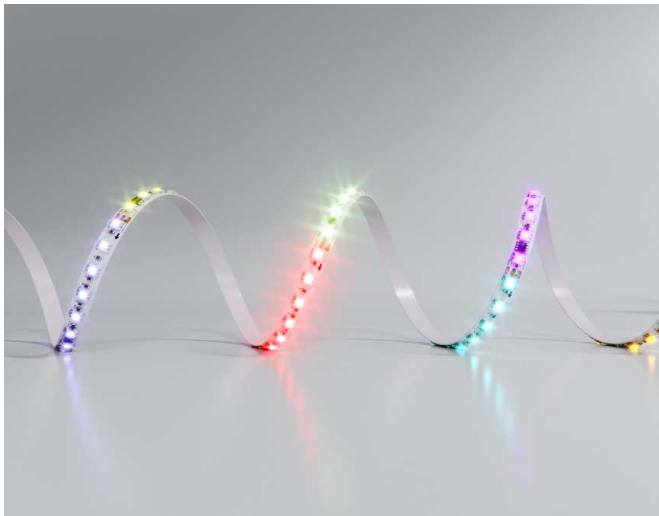

 Compatible profiles p. 294.

Technical Information

V / A / W	24V / 0,58A / 14W/m
IC	SM16703PB (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP2430	37 lm/w	515 lm/m	RGB	IP20


CE RoHS 

*Available in reel of 5 meters.
Accessories pages 282-293.


3 YEARS WARRANTY | 14 W/m | 84 LED/m |  | 24 VDC | 83,3mm  | SPI |  5050

New

Fine SPI-3

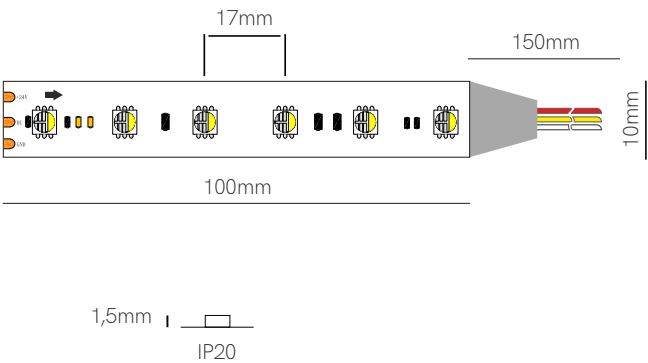

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,45A / 11W/m
IC	SK6812 12MA (10px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP3470	51 lm/w	561 lm/m	RGB-W 3.000K	IP20



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS WARRANTY

11 W/m

60 LED/m

III

24 VDC

100mm

✂



SPI

5050



New

Fine SPI-4

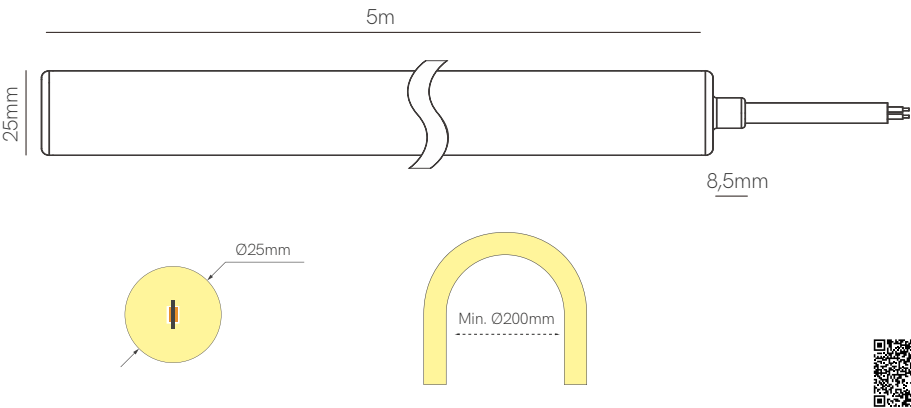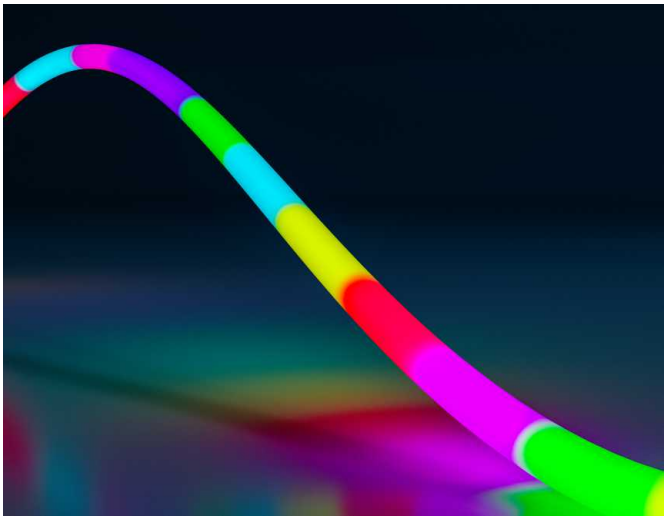

Technical Information

V / A / W	24V / 0,83A / 20W/m
IC	SK6812 12MA (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP4437	12,5 lm/w	250 lm/m	RGB	IP67

Accessories

End Cap	End Cap	Initial roof Cap	Clip	Initial Cap	Initial Cap	Tube	Joint with base	Suspension kit
■ 25627	□ 25657-1 ■ 25657-2 ■ 25657	□ 25997-1 ■ 25997-2 ■ 25997	■ 25530	□ 25667-1 ■ 25667-2 ■ 25667	■ 25637	■ 25450	□ 25227-1 ■ 25227-2 ■ 25227	■ 25887



*Available in reel of 5 meters. Accessories pages 282-293.

5 YEARS WARRANTY

20 W/m

168 LED/m



24 VDC

83,3mm

5050

New

Fine DMX-4

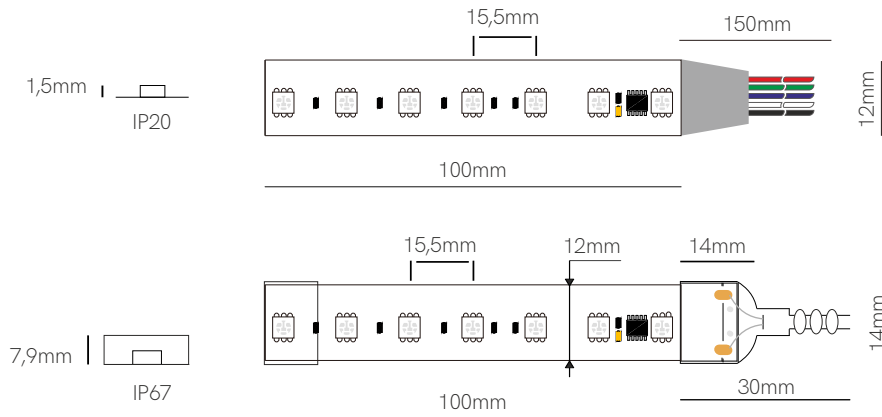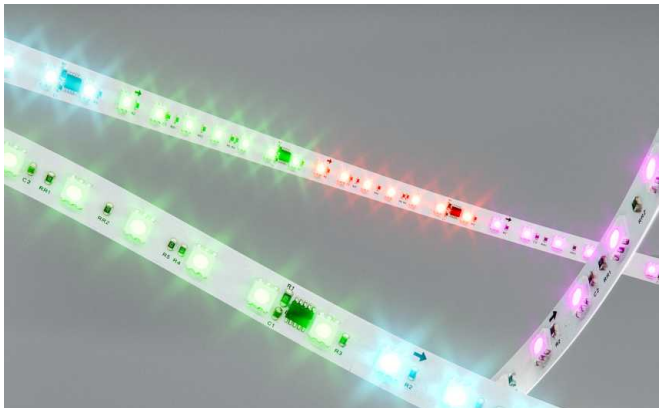

Compatible profiles p. 294.

Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM4430	42 lm/w	503 lm/m		IP20
	DM4437	42 lm/w	503 lm/m		IP67

Accessories




CE RoHS

*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS WARRANTY | 12 W/m | 70 LED/m | III | 24 VDC | 100mm | DMX | 5050

New

Fine DMX-5

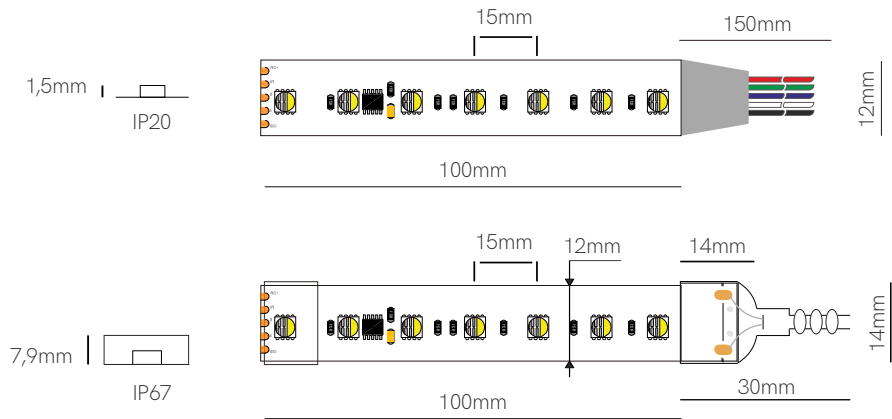

Compatible
profiles p. 294.



+



Technical Information

V / A / W

24V / 0,7A / 17W/m

IC

SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM5470	50 lm/w	861 lm/m	RGB-W 3.000K	IP20
	DM5477	50 lm/w	861 lm/m	RGB-W 3.000K	IP67

Accessories



End Cap
32635



End Cap
32625

CE RoHS

*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS
WARRANTY

12
W/m

70
LED/m



24
VDC

100mm



DMX

5050

NEON^{IP67}

LED Strips

Beneito Faure's 24V flexible neon strips allow you to choose between different light powers, protections, densities and lengths, while maintaining the safety and durability of low voltage installations.

The lighting needs for the nautical industry require a customized and high-performance solution.

All Beneito Faure neon strips have a certificate of resistance to corrosion, resistance to saline alkalis and anti-UV resistance, in addition to an ingress protection of IP67.






Las tiras flexibles neón de Beneito Faure de 24V permiten elegir entre diferentes rendimientos lumínicos, protecciones, densidades y longitudes, manteniendo la seguridad y la vida útil de las instalaciones de baja tensión.

Las necesidades de iluminación para el sector náutico requieren una solución personalizada y de alto rendimiento.

Todas las tiras neón de Beneito Faure tienen el certificado de resistencia a la corrosión, resistencia a los álcalis salinos y resistencia anti UV, además de un índice de protección lumínico de IP67.

Fine 25

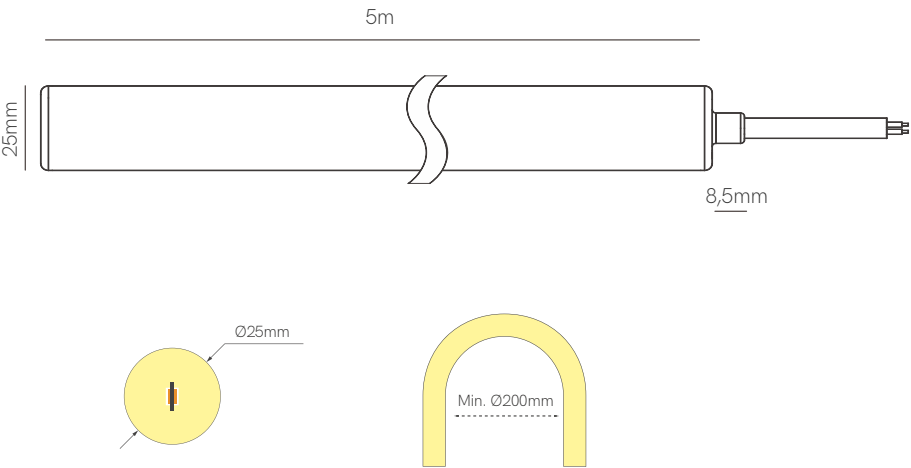

Technical Information

V / A / W	24V / 0,83A / 20W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	25247	60 lm/w	1.200 lm/m	2400K	IP67
	25277	65 lm/w	1.300 lm/m	2700K	IP67
	25307	69 lm/w	1.380 lm/m	3000K	IP67
	25407	73 lm/w	1.460 lm/m	4000K	IP67
	25367	70 lm/w	1.400 lm/m	2700K-6500K	IP67
	25467	41 lm/w	820 lm/m	RGB	IP67

*Available in reels of 1,5m, 3m and 5 meters.

Accessories

End Cap
■ 25627

End Cap
□ 25657-1
■ 25657-2
■ 25657

Initial roof Cap
□ 25997-1
■ 25997-2
■ 25997

Clip
■ 25530

Initial Cap
□ 25667-1
■ 25667-2
■ 25667

Initial Cap
■ 25637

Tube
■ 25450

Joint with base
□ 25227-1
■ 25227-2
■ 25227

Suspension kit
■ 25887



Accessories pages 282-293.

5 YEARS WARRANTY

20 W/m

320 LED/m

480 LED/m (CCT)

240 LED/m (RGB)

24 VDC

10mm / 50mm (CCT-RGB)

2835


4040 (RGB)

CRI ≥90






FITSEVENELEVEN®, Club Frankfurt Airport.

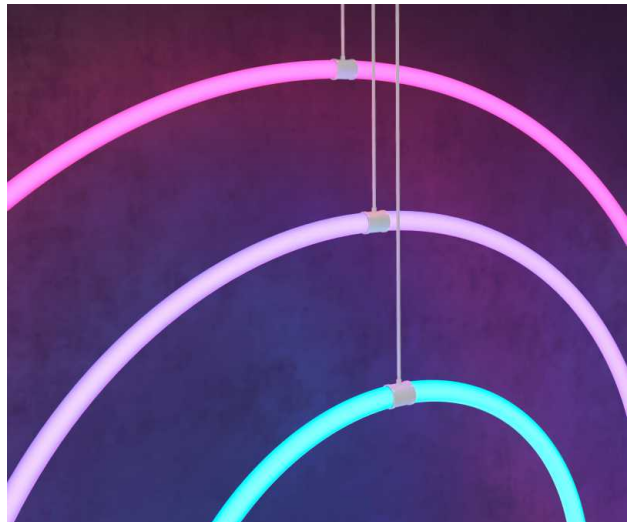

Fine 70

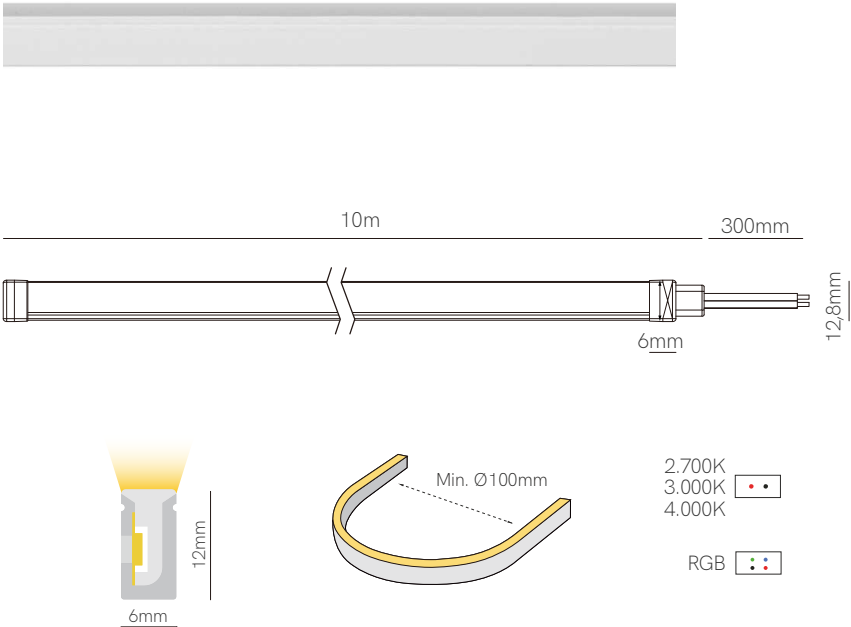

Technical Information

V / A / W	24V / 0,20A / 5W/m
-----------	--------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	70277	31 lm/w	155 lm/m	2700K	IP67
	70307	35 lm/w	175 lm/m	3000K	IP67
	70407	37 lm/w	185 lm/m	4000K	IP67
	70437	15 lm/w	75 lm/m	RGB	IP67

Accessories

End Cap	End Cap	End Cap	Clip	Clip	Clip
70627	70967	70637	19,7x8x13mm	1000x8x13mm	1000x8,5x12,5mm
			70330	70119	70350



*Available in reel of 10 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

5 W/m

140 LED/m

96 LED/m (RGB)

24 VDC

III

50mm

2835

4040 (RGB)


CRI ≥90







Fine 72

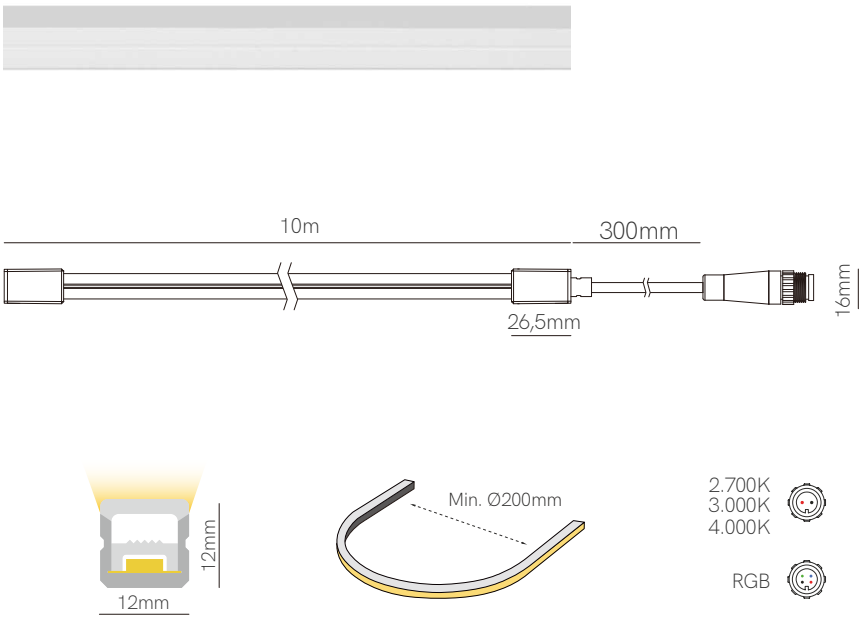

Technical Information

V / A / W 24V / 0,41A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	72277	59 lm/w	590 lm/m	2700K	IP67
	72307	62 lm/w	620 lm/m	3000K	IP67
	72407	65 lm/w	650 lm/m	4000K	IP67
	72437	26 lm/w	260 lm/m	RGB	IP67

Accessories

End Cap

72967-L2

72967-L4

End Cap

72967-2

72967-4

End Cap

72627-2

72627-4

End Cap

72637

Clip

20,2x16,8x12,5mm

77530

Clip

1000x19,2x17,8mm

77519

Clip

1000x26,4x18mm

77350

Extension cable

77946 (Mono)

77920 (RGB)



*Available in reel of 10 meters. Accessories pages 282-293.

5 YEARS WARRANTY

10 W/m

140 LED/m

96 LED/m (RGB)

24 VDC

III

50mm / 62,5mm (RGB)

✂

2835

4040 (RGB)

CRI ≥90


☀

💡

💡



Fine 74

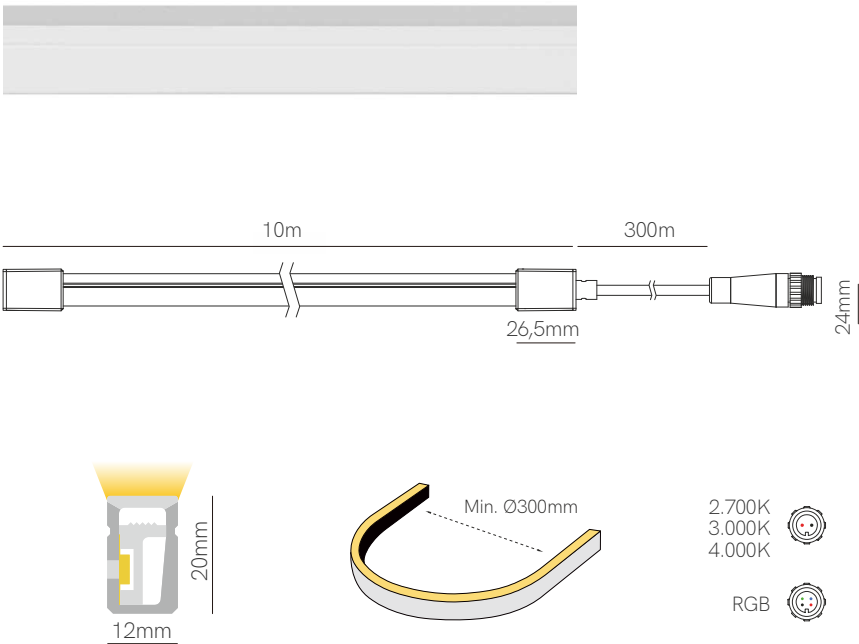

Technical Information

V / A / W	24V / 0,41A / 10W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	74277	59 lm/w	590 lm/m	2700K	IP67
	74307	62 lm/w	620 lm/m	3000K	IP67
	74407	65 lm/w	650 lm/m	4000K	IP67
	74437	22 lm/w	220 lm/m	RGB	IP67

Accessories

End Cap

74967-L2
74967-L4

End Cap

74967-2
74967-4

End Cap

74627-2
74627-4

End Cap

74637

Clip

20,2x16,8x12,5mm
77330

Clip

1000x19,2x17,8mm
77119

Clip

1000x26,4x18mm
77350

Extension cable

77946 (Mono)
77920 (RGB)



*Available in reel of 10 meters. Accessories pages 282-293.

5 YEARS WARRANTY

10 W/m

140 LED/m

96 LED/m (RGB)

24 VDC

III

50mm / 55,5mm (RGB)

✂

2835


4040 (RGB)

CRI ≥90

☀

💡

💡

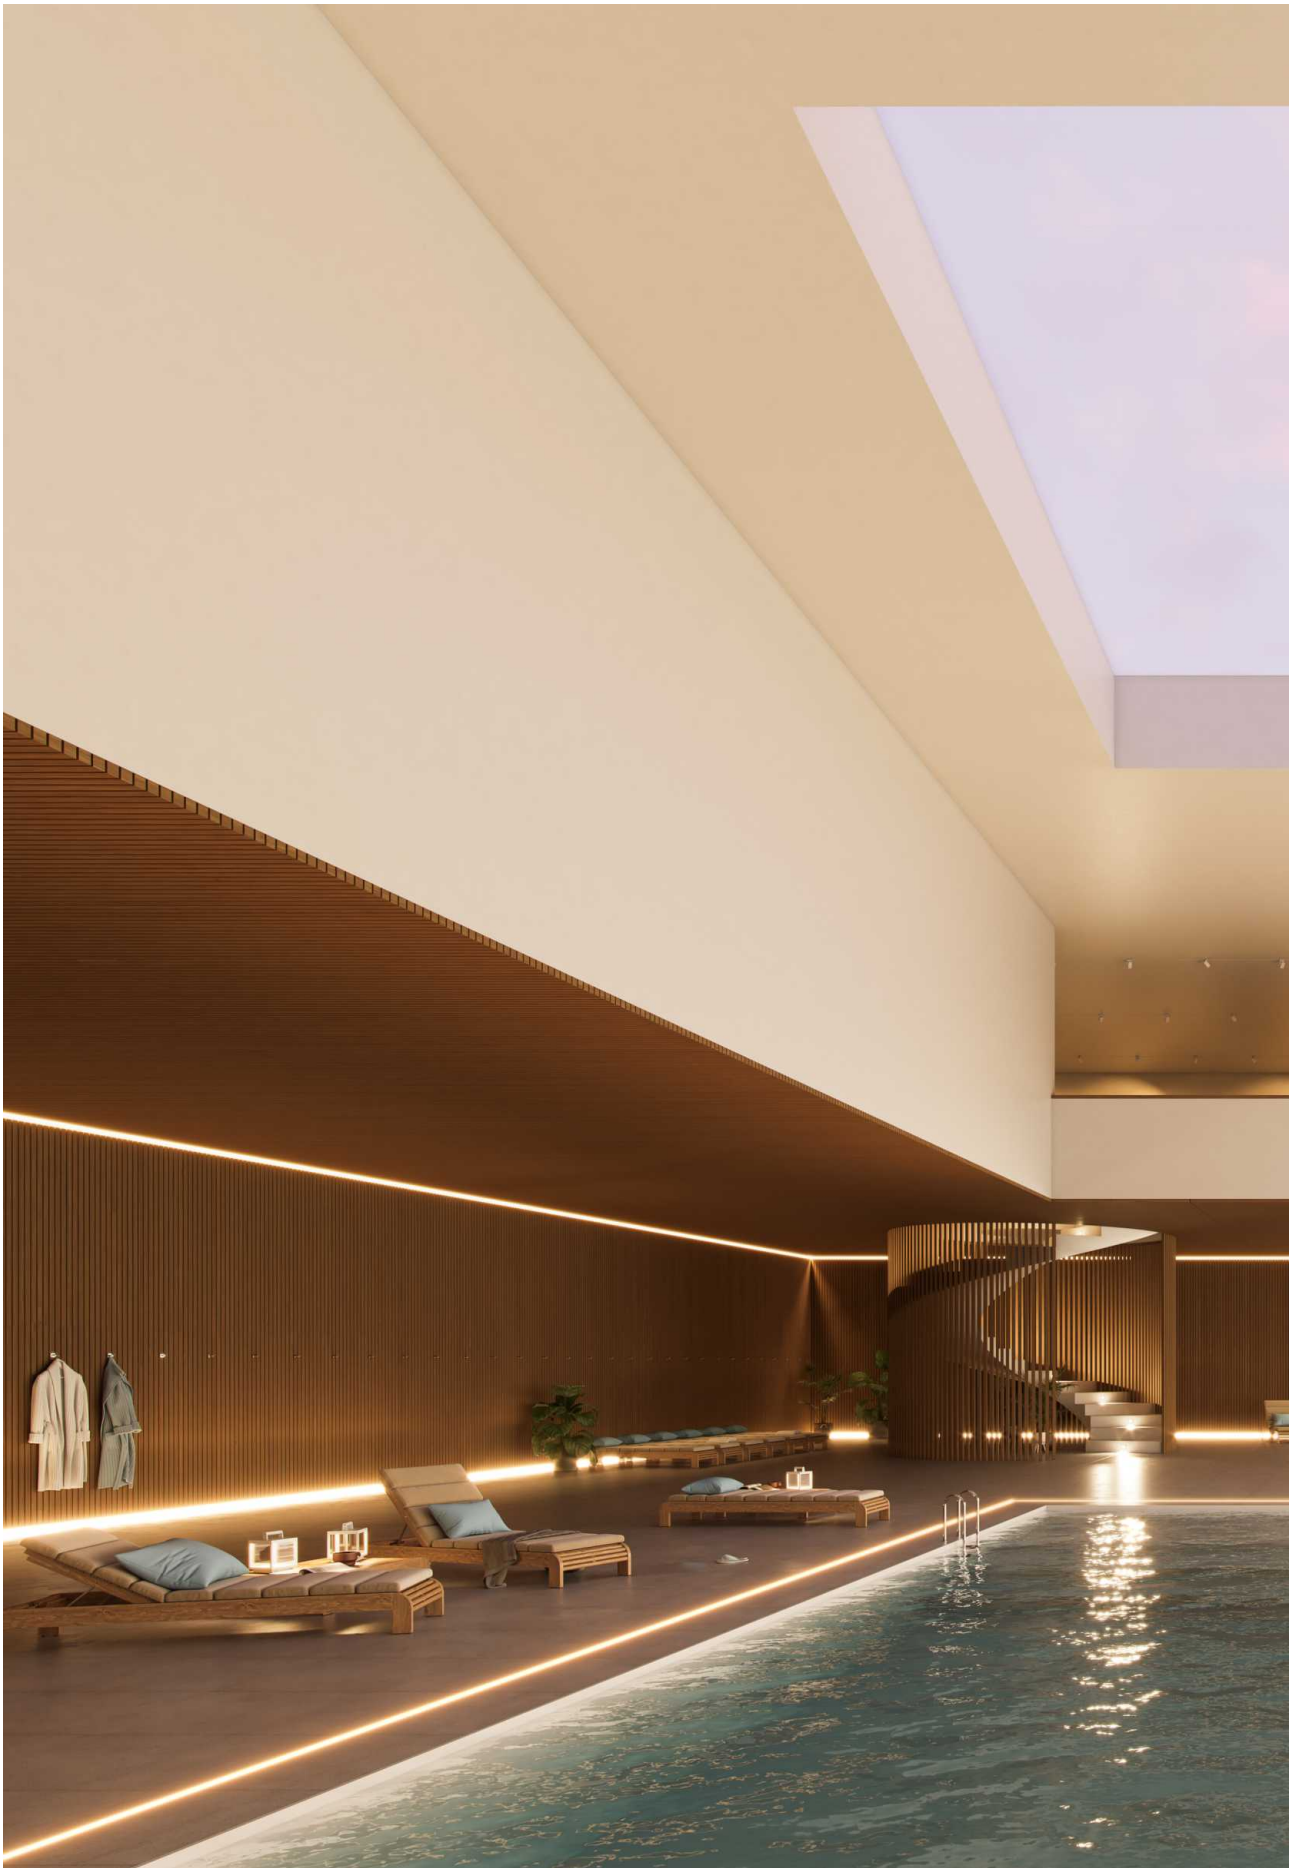





LED Strips accessories



Control Basic

	Code	Version	Power Max	VDC IN	Size
1.	90990	☐ RF Mono Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
2.	89260	☐ RF CCT Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
3.	88460	☐ RF RGB Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
4.	91430	☐ RF RGB-W Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
5.	86019	☐ Controller Mono/CCT/RGB Basic	3Cx5A	12-24 VDC	145x46x18mm
6.	87029	☐ Controller RGB-W Basic	5Cx5A	12-24 VDC	145x46x18mm

((())) RF |



Control Top

	Code	Version	Power Max	VDC IN	Size
1.	81990	☒ RF Mono Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
2.	80260	☒ RF CCT Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
3.	79430	☒ RF RGB-W Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
4.	77019	☐ Controller Mono/CCT/RGB/RGB-W Top	4Cx5A	12-23 VDC / 5Ax4C	178x46x18mm
5.	82995	☐ RF Mono Button Panel Top	-	24 VDC	86x86x41mm
6.	83475	☒ RF RGB-W Button Panel Top	-	24 VDC	86x86x41mm

((())) RF |



3 YEARS WARRANTY | IP 20



RF Control for Tuya

	Code	Version	Power Max	VDC IN	Size
1.	85890	RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85360	RF CCT	-	3VDC (CD2032)	139x36x11mm
3.	85460	RF RGB	-	3VDC (CR2032)	139x36x11mm
4.	85470	RF RGB-W	-	3VDC (CR2032)	139x36x11mm
5.	85990	New RF RGB+CCT	-	3VDC (CR2032)	139x36x11mm
6.	85894	RF Dimming 4 Zone	-	3VDC (CR2032)	138x50x22mm
7.	85364	New RF CCT 4 Zone	-	4,5 VDC (3xAAA)	120x55x17mm
8.	85475	New RF RGB-W 4 Zone	-	4,5 VDC (3xAAA)	120x55x17mm
9.	85995	New RF RGB+CCT 4 Zone	-	4,5 VDC (3xAAA)	120x55x17mm

tuya | ((•)) RF |



Control Tuya

	Code	Version	Power Max	VDC IN	Size
1.	22856	Controller Tuya 5C	5Cx3A	12-24 VDC	114x38x20mm
2.	22821	Controller Push/Tuya 2C	2Cx5A	12-36W	114x38x20mm
3.	22570	New Controller Push/Tuya/RF 5C	5Cx6A	12-48W	179x56x30mm

tuya |




3 YEARS WARRANTY | IP 20





Control Casambi

	Code	Version	Power Max	VDC IN	Size
1.	59682	New Touch Dimmer Casambi 4C Oak/Black	-	-	Ø73x62mm
2.	59689	New Touch Dimmer Casambi 4C Oak/Silver	-	-	Ø73x62mm
3.	59182	New Touch Dimmer Casambi 4C Mahogany/Black	-	-	Ø73x62mm
4.	59189	New Touch Dimmer Casambi 4C Mahogany/Silver	-	-	Ø73x62mm
5.	59112	New Wall touch panel Black	-	-	146x90x24mm
6.	57241	Xpress Casambi White	-	-	90x90x12mm
7.	57242	Xpress Casambi Black	-	-	90x90x12mm
8.	59121	New Wall switch batteryfree 2C White	-	-	81x81x14mm
9.	59122	New Wall switch batteryfree 2C Anthracite	-	-	81x81x14mm
10.	59141	New Wall switch batteryfree 4C White	-	-	81x81x14mm
11.	59142	New Wall switch batteryfree 4C Anthracite	-	-	81x81x14mm

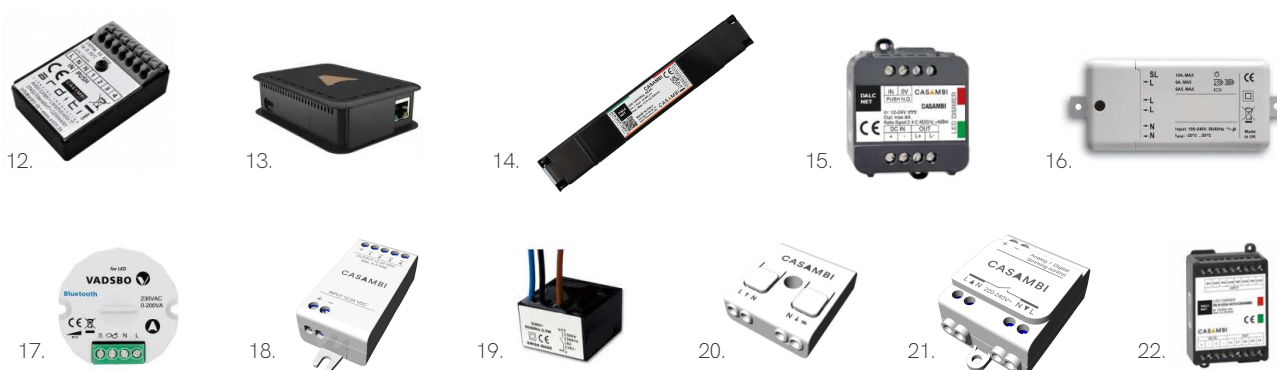

Control Casambi

	Code	Version	Power Max	VDC IN	Size
12.	57924	☐ New Controller input 4 button Casambi	-	230 VAC	45x19x17mm
13.	59629	☐ New Smart Gateway Casambi	-	230 VAC	101x74x29mm
14.	59549	☐ New Led Strips regulator 5C Casambi/Push	5CX5A	12-48V	186x29x21mm
15.	59519	☐ New Led Strips regulator 1C Casambi/Push	12A	12-48V	44x57x19mm
16.	59733	☐ New Relay Casambi	10A	-	120x50 x32mm
17.	59777	☐ New Triac Dimmable Casambi/Push	-	-	Ø52x15,5mm
18.	59249	☐ Control CBU-PWM4	4Cx1,5A	12-24 VDC	72,6x30x18mm
19.	59739	☐ Relay Casambi	10A	200-240 VAC	35x22x35mm.
20.	59769	☐ Controller End of phase	0,43A	85-240 VAC	40,4x36x2x14mm
21.	59789	☐ Interface 0-10/1-10 Dali	-	220-240 VAC	56,5x35,8x22,3mm
22.	57588	☐ Controller PWM4+Push	4Cx5A	12-24 VDC	88x54x25mm

CASAMBI |



Control PMW / RF



	Code	Version	Power Max	VDC IN	Size
1.	85890	☒ RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85894	☒ RF Dimming 4 Zone	-	3VDC (CR2032)	138x50x22mm
3.	22799	☐ New Controller Push/RF Progressive	8A	12-48 VDC	120x43x27mm
4.	22726	☐ Control Push - Dim / RF	8A	5-36 VDC	97x33x18mm

((())) RF | **PMW** |



Control SPI New

	Code	Version	Power Max	Pixels Max	VDC IN	Size
1.	92353	SPI 1 Zone RGB/RGB-W Remote	-	-	3VDC (CR2032)	107x58,5x9mm
2.	92473	Controller SPI (RGB/RGB-W)	8A	1.024	5-24 VDC	97x33x18mm
3.	92853	Controller SPI / Tuya (RGB/RGB-W)	8A	1.000	5-24 VDC	114x38x20mm
4.	92553	SPI Signal Repeater	-	-	5-24 VDC	52x52x126mm
5.	92699	Controller SPI / Computer	-	2.048	5-24 VDC	159x89x24mm

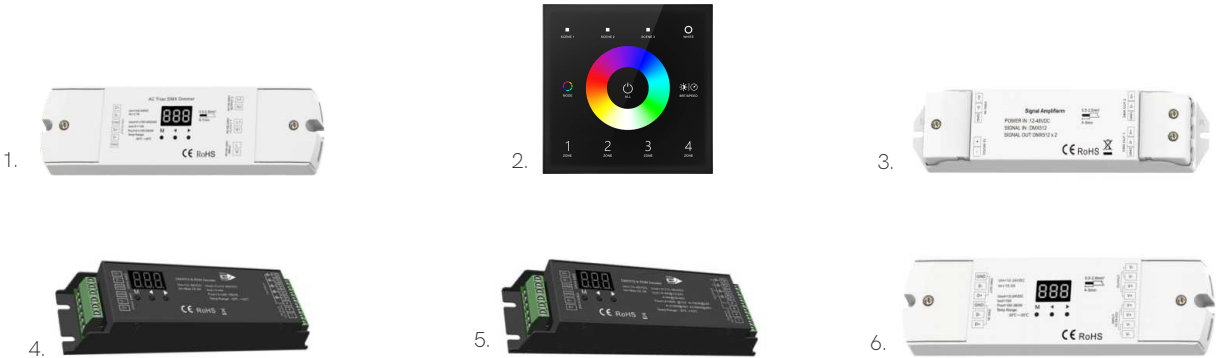

Control DMX New

	Code	Version	Power Max	VDC IN	Size
1.	96009	Controller DMX / Triac 2CH	2Cx1A	100-240 VAC	170x50x23mm
2.	93470	RF RGB-W DMX Touch Panel 4 Zone	-	100-240 VAC	86x86x33mm
3.	95153	Amplifier DMX 2CH	-	12-48 VDC	175x45x27mm
4.	93579	Decoder DMX 5152 5CH	5Cx4A	12-48 VDC	175x46x24mm
5.	95479	Decoder DMX 5152 4CH	4Cx5A	12-48 VDC	175x46x24mm
6.	95179	Decoder DMX 5152 1CH	15A	12-24 VDC	170x50x23mm



3 YEARS WARRANTY | IP 20




Control Push / Triac

	Code	Version	Power Max	VDC IN	Size
1.	85890	RF Dimming	-	3 VDC (CR2032)	139x36x11mm
2.	85894	RF Dimming 4 Zones	-	3 VDC (CR2032)	138x50x22mm
3.	84431	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
4.	22726	Control Push - Dim	8A	5-36 VDC	97x33x18mm
5.	85876	Controller Wifi RF Push Triac Tuya	1,5A	100-240 VAC	52x52x26mm
6.	85884	Controller RF Push Triac	2A	100-240 VAC	110x48x67mm



Control Dali Push Triac


	Code	Version	Power Max	VDC IN	Size
1.	22948	Controller Dali+Push/Triac	1,5A	100-240 VAC	187x46x22mm



Control Dali Push


	Code	Version	Power Max	VDC IN	Size
1.	22490	Controller PWM Dali Push 1-10V	12A	12-24-48 VDC	155x51x26mm
2.	22499	Controller PWM Dali Push 1-10V	5A	12-24-48 VDC	132x22x20mm



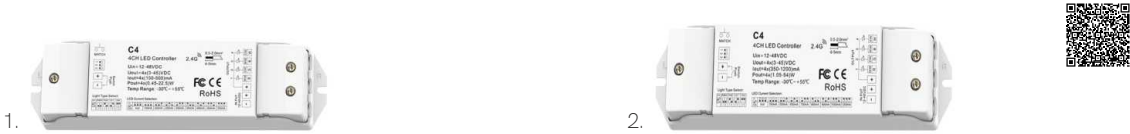

Control Driver RF / Push New

	Code	Version	Power Max	VDC IN	Size
1.	22911 ☐	Controller 4CH RF Push	3-45 VDC/150-500mA	12-48V	139x36x11mm
2.	22974 ☐	Controller 4CH RF Push	3-45 VDC/350-1.200mA	12-48V	138x50x22mm

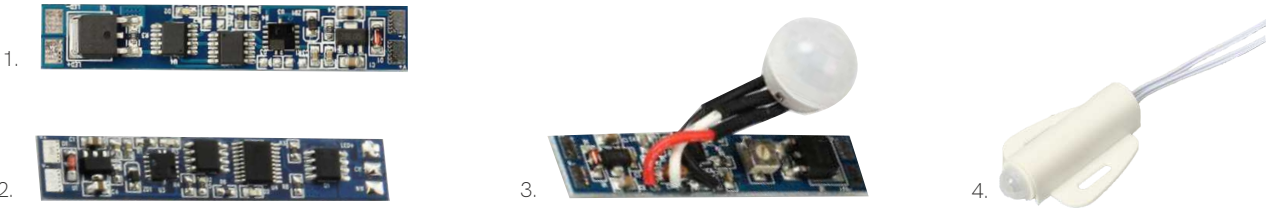

Motion Sensor

	Code	Version	Power Max	VDC IN	Size
1.	85993 ☒	Mini Sensor Mono PWM	6A	12-24 VDC	55x10mm
2.	85263 ☒	Mini Sensor CCT PWM	2Cx4A	12-24 VDC	55x10mm
3.	85183 ☒	Motion Sensor Pir	8A	12-24 VDC	55x10mm
4.	85332 ☐	Motion Sensor Surface Pir	4A	12-24 VDC	45x62mm



Motion Sensor

	Code	Version	Power Max	VDC IN	Size
1.	85220 ☐	Sensor Pir Double Surface hand/door	4A	12-24 VDC	12x12mm
2.	85120 ☐	Sensor Simple Surface door	4A	12-24 VDC	12x12mm
3.	85420 ☐ New	Sensor Simple Surface hand	4A	12-24 VDC	12x12mm
4.	85626 ☐	Sensor Pir Double Recessed hand/door	4A	12-24 VDC	14x18mm
5.	85336 ☐	Sensor Simple Recessed door	4A	12-24 VDC	14x18mm
6.	85330 ☐ New	Sensor Simple Recessed hand	4A	12-24 VDC	14x18mm



Power Supplies 24V

Power Supplies Standard

Code		Power	IP	VAC IN	VDC OUT	Size
62430	☐	30W	IP20	198-264 VAC	24 VDC	162x42x30mm
62460	☐	60W	IP20	198-264 VAC	24 VDC	187x45x30mm
62475	☐	75W	IP20	198-264 VAC	24 VDC	187x45x30,5mm
62412	☐	120W	IP20	198-264 VAC	24 VDC	268x45x30,5mm
62415	☐	150W	IP20	198-264 VAC	24 VDC	268x45x30,5mm



Power Supplies Basic

Code		Power	IP	VAC IN	VDC OUT	Size
22420	☐	24W	IP67	176-264 VAC	24 VDC	110x40x30mm
22435	☐	40W	IP67	176-264 VAC	24 VDC	148x40x30mm
22460	☐	60W	IP67	176-264 VAC	24 VDC	162,5x42,5x32mm
22410	☐	100W	IP67	176-264 VAC	24 VDC	190x52x33mm




Power Supplies Top

Code		Power	IP	VAC IN	VDC OUT	Size
22415	☐	150W	IP67	90-264 VAC	24 VDC	191x63x37,5mm
22424	☒	240W	IP67	90-305 VAC	24 VDC	244,2x68x38,8mm
22430	☒	300W	IP67	90-305 VAC	24 VDC	246x77x39,5mm
22432	☒	320W	IP67	90-305 VAC	24 VDC	252x90x43,8mm



Power Supplies Slim

Code		Power	IP	VAC IN	VDC OUT	Size
TR3024	☐	30W	IP20	176-264 VAC	24 VDC	261x30x17mm
TR6024	☐	60W	IP20	176-264 VAC	24 VDC	329x30x17mm
TR10024	☐	100W	IP20	176-264 VAC	24 VDC	365X30X18mm
TR16024	☒ New	160W	IP20	198-264 VAC	24 VDC	395X30,8X21,5mm





Power Supplies Triac

Code		Power	IP	VAC IN	VDC OUT	Size
24609	☐	60W	IP20	200-240 VAC	24 VDC	178x61x24mm
24109	☒	100W	IP66	200-240 VAC	24 VDC	230x70x43mm
24159	☒	150W	IP66	200-240 VAC	24 VDC	256x78x47mm
24309	☒ New	300W	IP66	200-240 VAC	24 VDC	276x78x47mm



Power Supplies Dali-2 / Push New

Code		Power	IP	VAC IN	VDC OUT	Size
64458	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64808	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64158	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm



Power Supplies Dali-2

Code		Power	IP	VAC IN	VDC OUT	Size
24758	☒	90W	IP67	100-305 VAC	24 VDC	180x63x35,5mm
24108	☒	120W	IP67	100-305 VAC	24 VDC	199x63x35,5mm
24208	☒	200W	IP67	100-305 VAC	24 VDC	219x63x35,5mm
24308	☒ New	300W	IP66	110-277 VAC	24 VDC	301x78x25,1mm



Power Supplies Dali-2 DT-8 / Push Dim - CCT New

Code		Power	IP	VAC IN	VDC OUT	Size
64453	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64803	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64153	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm



PF >0,9 | 3 YEARS WARRANTY

Led strips accessories

SMD 10mm Monocolor IP20



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120



Joint
15,4x11,5x5,7mm
■ 20991



Joint
21,6x11,5x5,7mm
■ 20999

SMD 10mm Monocolor IP65



End Cap
■ 20635



End Cap
■ 20625



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

SMD 10mm Monocolor IP67



End Cap
■ 32635



End Cap
■ 32625

Fine 32 IP65



End Cap
■ 32635



End Cap
■ 32625



Connector kit
■ 32699



Join 180°
■ 32899



Join 90°
■ 32499



Clip
■ 32900



Joint
■ 32299

COB 10mm Monocolor IP20



Joint
■ 31709



Joint
■ 31809



Joint
■ 31909

COB 10mm Monocolor IP67



End Cap
■ 32635



End Cap
■ 32625

SMD 10mm CCT IP20



Joint
13,8x11,55x3,9mm
■ 20230



Joint
13,55x11,67x4,7mm
■ 20130

SMD 10mm CCT IP65



End Cap
20635



End Cap
20625



Joint
24,3x14,6x7,7mm
20235



Joint
24,3x14,6x7,7mm
20135

SMD 10mm RGB IP20



Joint
13,54x11,7x4,1mm
20240



Joint
13,56x13,46x4,7mm
20140

SMD 10mm RGB IP65



End Cap
20635



End Cap
20625



Joint
24,3x14,6x7,68mm
20245



Joint
24,3x14,6x7,68mm
20145

SMD 12mm RGBW IP20



Joint
13,5x13,73x4,2mm
20150



Joint
13,5x13,55x4,8mm
20250

COB 12mm RGBW IP20



Joint
20066



Joint
20266

SMD 4mm Monocolor IP20



Joint
20049



Joint
20249

Single-wire connections



20917



20915

Bipolar connections



20927



20925

FINE	31		32 N		36	41	42	43	44	45		46	47	48	49	50	51		
BOX-10	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-11	—		—		—	—	—	—	—	—		—	—	—	✓	✓	—		
BOX-12	—		—		—	—	—	—	—	—		—	—	—	✓	✓	—		
BOX-13	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-14	IP20 ✓	IP67 —	—		✓	✓	✓	—	✓	IP20 ✓	IP67 —	✓	—	✓	✓	✓	IP20 ✓	IP67 —	
BOX-15	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-16	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-17	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-18	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-19	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-21	IP20 ✓	IP67 —	—		✓	✓	✓	—	✓	IP20 ✓	IP67 —	✓	—	✓	✓	✓	IP20 ✓	IP67 —	
BOX-22	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-23	✓		✓		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		
BOX-24	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-27	IP20 ✓	IP67 —	—		✓	✓	✓	—	✓	IP20 ✓	IP67 —	✓	—	✓	✓	✓	IP20 ✓	IP67 —	
BOX-28	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-29	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	—	✓	✓	✓	✓		
BOX-30 12mm	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-30 20mm	✓		✓		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		
BOX-33	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	✓		
BOX-35	✓		✓		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		
BOX-37	✓		✓		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		
BOX-38	✓		✓		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		
BOX-39	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-53	✓		✓		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		
BOX-60	IP20 ✓	IP67 —	—		✓	✓	✓	✓	✓	IP20 ✓	IP67 —	✓	✓	✓	✓	✓	IP20 ✓	IP67 —	
BOX-65	IP20 ✓	IP67 —	—		✓	✓	✓	—	✓	IP20 ✓	IP67 —	✓	—	✓	✓	✓	IP20 ✓	IP67 —	
BOX-67	IP20 ✓	IP67 —	—		✓	✓	✓	—	✓	IP20 ✓	IP67 —	✓	—	✓	✓	✓	IP20 ✓	IP67 —	
BOX-68	IP20 ✓	IP67 —	—		✓	✓													

[illegible]

Recommended Wiring

FINE	5 mts	10 mts	15 mts	20 mts	25 mts
FINE 31	0,35 mm	—	—	—	—
FINE 32N	0,5 mm	0,5 mm	0,5 mm	0,5 mm	0,5 mm
FINE 36	0,5 mm	0,5 mm	—	—	—
FINE 41	0,5 mm	0,75 mm	0,75 mm	—	—
FINE 42	0,35 mm	0,5 mm	—	—	—
FINE 43	0,35 mm	—	—	—	—
FINE 44	0,5 mm	0,75 mm	—	—	—
FINE 45	0,35 mm	0,5 mm	0,75 mm	—	—
FINE 46	0,5 mm	0,75 mm	0,75 mm	—	—
FINE 47	0,35 mm	—	—	—	—
FINE 48	0,35 mm	0,5 mm	—	—	—
FINE 49	0,35 mm	—	—	—	—
FINE 50	0,35 mm	—	—	—	—
FINE 51	0,5 mm	0,75 mm	1 mm	—	—
FINE 52	0,5 mm	—	—	—	—
FINE 54	0,35 mm	—	—	—	—
FINE 55	0,35 mm	0,5 mm	—	—	—
FINE 56	0,35 mm	0,5 mm	—	—	—
FINE 61	0,35 mm	—	—	—	—
FINE 63	0,5 mm	0,75 mm	—	—	—
FINE 64	0,5 mm	0,75 mm	—	—	—
FINE 66	0,5 mm	—	—	—	—
FINE 69	0,2 mm	0,2 mm	—	—	—
FINE 71	0,5 mm	—	—	—	—
FINE 76	0,35 mm	0,5 mm	0,75 mm	—	—
FINE 84	0,35 mm	0,35 mm	0,5 mm	0,75 mm	1 mm
FINE 96	0,35 mm	0,5 mm	—	—	—

*Cable section.

Light Perception

	Open Circuit					Back Feed				
FINE	5 mts	10 mts	15 mts	20 mts	25 mts	5 mts	10 mts	15 mts	20 mts	25 mts
FINE 31	95%	—	—	—	—	95%	95%	—	—	—
FINE 32N	100%	100%	90%	90%	80%	—	—	—	—	—
FINE 36	90%	66%	—	—	—	95%	90%	76%	—	—
FINE 41	94%	72%	55%	—	—	96%	94%	79%	72%	—
FINE 42	98%	78%	—	—	—	100%	93%	—	—	—
FINE 43	100%	—	—	—	—	100%	—	—	—	—
FINE 44	94%	72%	—	—	—	98%	94%	—	—	—
FINE 45	95%	75%	55%	—	—	96%	94%	85%	—	—
FINE 46	94%	72%	55%	—	—	96%	94%	79%	72%	—
FINE 47	100%	—	—	—	—	100%	—	—	—	—
FINE 48	98%	96%	—	—	—	100%	99%	98%	97%	96%
FINE 49	90%	—	—	—	—	100%	—	—	—	—
FINE 50	95%	—	—	—	—	100%	—	—	—	—
FINE 51	100%	80%	70%	—	—	100%	95%	90%	—	—
FINE 52	100%	—	—	—	—	100%	100%	—	—	—
FINE 54	98%	—	—	—	—	100%	90%	—	—	—
FINE 55	94%	72%	—	—	—	98%	94%	—	—	—
FINE 56	98%	80%	—	—	—	100%	95%	—	—	—
FINE 61	100%	—	—	—	—	100%	100%	—	—	—
FINE 63	92%	65%	—	—	—	96%	92%	70%	65%	—
FINE 64	98%	96%	—	—	—	100%	98%	96%	94%	92%
FINE 66	98%	—	—	—	—	100%	—	—	—	—
FINE 69	98%	73%	—	—	—	100%	88%	70%	63%	—
FINE 71	95%	—	—	—	—	100%	—	—	—	—
FINE 76	100%	80%	70%	—	—	100%	95%	90%	—	—
FINE 84	100%	100%	90%	90%	80%	100%	100%	100%	95%	95%
FINE 96	100%	80%	—	—	—	100%	95%	—	—	—

*Efficiency (%).

